

3S8W_1.5RP series

3W - Dual/Single Output - Wide Input - Isolated & Regulated
DC-DC Converter



- ⊕ 2:1 wide input voltage range
- ⊕ 1500VDC isolation
- ⊕ Short circuit protection (SCP)
- ⊕ Remote On/Off control
- ⊕ High power density
- ⊕ Operating temperature: -40°C to +85°C
- ⊕ RoHS compliance
- ⊕ Ultra compact SIP8 package
- ⊕ EN60950 approved



Common specifications	
Short circuit protection:	Continuous, automatic recovery
Temperature rise at full load:	25°C typ.
Cooling:	Free air convection
Operation temperature range:	-40°C~+85°C (with derating)
Storage temperature range:	-55°C ~+125°C
Lead temperature range:	300°C max., 1.5mm from case for 10 sec
Storage humidity range:	< 95%
Case material:	Plastic [UL94-V0]
MTBF (MIL-HDBK-217F@25°C):	>1,000,000 hours
Weight:	4.9g
Dimensions:	22 x 9.5 x 12mm

Input specifications					
Item	Test condition	Min	Typ	Max	Units
Input current (full load/no load)	• 5VDC input				
	- 3.3V input		735/40	758/85	mA
	- Others		805/40	846/65	mA
	• 12VDC input				
	- 3.3V input		278/30	286/40	mA
	- Others		314/30	338/40	mA
	• 24VDC input				
	- 3.3V input		140/20	145/40	mA
	- Others		154/20	163/40	mA
	• 48VDC input				
	- 3.3V input		69/5	72/15	mA
	- Others		78/5	85/15	mA
Reflected ripple current	• 5VDC input		20		mA
	• 12VDC input		20		mA
	• 24VDC input		55		mA
	• 48VDC input		55		mA
Input impulse voltage (1 sec. max.)	• 5VDC input	-0.7		12	VDC
	• 12VDC input	-0.7		25	VDC
	• 24VDC input	-0.7		50	VDC
	• 48VDC input	-0.7		100	VDC
Starting voltage	• 5VDC input			4.5	VDC
	• 12VDC input			9	VDC
	• 24VDC input			18	VDC
	• 48VDC input			36	VDC
Input filter	Filter capacitor				
Hot plug	Unavailable				
Ctrl ¹⁾	• Models ON	The Ctrl end is suspended or of high resistance Connect with high level (relative to the input grounding) to make the 5-10mA current flows into the Ctrl end.			
	• Models OFF				

¹⁾ Please refer to „Application note“ as the direction for use of Ctrl.

DC-DC Converter

3 Watt

The Introducing our new ultra-compact DC-DC converter 3S8W_1.5RP series designed for performance, protection, and flexibility - all in a SIP8 package. With a 2:1 wide input voltage range and 1,500VDC isolation, it delivers reliable operation across diverse applications. Built-in short circuit protection (SCP) and remote On/Off control offer added safety and control, while the high power density maximizes performance in minimal space. Engineered for tough environments, it operates flawlessly in extreme temperatures from -40°C to +85°C, and meets global standards with RoHS compliance and EN60950 approval.

Output specifications					
Item	Test condition	Min	Typ	Max	Units
Output voltage accuracy	5% to 100% load		±1	±3	%
No load output voltage accuracy	Input voltage range • 3S8W1203_1.5RP, 3S8W1203_1.5RP • Others		±5	±8	%
			±1.5	±5	%
Output Voltage Balance	Dual output, balanced loads		±0.5	±1	%
Line regulation	Input voltage from low to high, full load		±0.2	±0.5	%
Load regulation	5% to 100% load		±0.6	±1	%
Temperature coefficient	100% load		±0.02	±0.03	%/°C
Ripple & Noise*	20MHz bandwidth 3S8W_1212S1.5RP 3S8W_1215S1.5RP 3S8W_4824S1.5RP		70	100	
			70	100	
			70	100	
	3S8W_1224S1.5RP 3S8W_2415S1.5RP 3S8W_2424S1.5RP 3S8W_4805D1.5RP 3S8W_4803S1.5RP		100	150	
			100	150	
			100	150	
			100	150	
			100	150	
	Others		40	75	
Transient recovery time	25% load step change		0.5	3	ms
Transient response deviation	25% load step change		±2.5	±5	%

Isolation specifications					
Item	Test condition	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute, leakage current less than 1 mA	1500			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Isolation capacitance	Input/Output, 100KHz/0.1V		120		pF

Example:

3S8W_0505S1.5RP

3 = 3Watt; S8 = SIP8; W = wide input; 05 = 4,5 - 9Vin; 05 = 5Vout;
S = Single Output; 1.5 = 1500VDC; R = Regulated Output; P = Short Circuit Protection

3S8W_1.5RP series

3W - Dual/Single Output - Wide Input - Isolated & Regulated
DC-DC Converter

EMC specifications				
EMI	CE	CISPR32/EN55032 CLASS B (External Circuit Refer to EMC recommended circuit, ^②)		
EMI	RE	CISPR32/EN55032 CLASS B (External Circuit Refer to recommended circuit, ^②)		
EMS	ESD	IEC/EN61000-4-2	Contact ±4kV	perf. Criteria B
EMS	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
EMS	EFT	IEC/EN61000-4-4	±2kV	perf. Criteria B (External Circuit Refer to EMC recommended circuit, ^①)
EMS	Surge	IEC/EN61000-4-5	±2kV	perf. Criteria B (External Circuit Refer to EMC recommended circuit, ^①)
EMS	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A
EMS	Voltage dips, short and interruptions immunity	IEC/EN61000-4-29	0%-70%	perf. Criteria B

Part Number	Input Voltage [VDC]			Output Voltage [VDC]	Output Current [mA]		Ripple&Noise [mVp-p, Typ./Max.]	Capacitive load ²⁾ [μF, Max.]	Efficiency [%, Typ.]
	Nominal	Range	Max ¹⁾		Max	Min			
3S8W_0503S1.5RP	5	4.5-9	11	3.3	758	38	40/75	1800	68
3S8W_0505S1.5RP	5	4.5-9	11	5	500	25	40/75	2200	73
3S8W_0509S1.5RP	5	4.5-9	11	9	278	14	40/75	1000	74
3S8W_0512S1.5RP	5	4.5-9	11	12	208	10	40/75	680	77
3S8W_0515S1.5RP	5	4.5-9	11	15	167	8	40/75	470	74
3S8W_0524S1.5RP	5	4.5-9	11	24	104	5	40/75	330	76
3S8W_1203S1.5RP	12	9-18	22	3.3	758	38	40/75	2700	75
3S8W_1205S1.5RP	12	9-18	22	5	600	30	40/75	2200	76
3S8W_1206S1.5RP	12	9-18	22	6	500	25	40/75	1800	79
3S8W_1209S1.5RP	12	9-18	22	9	333	17	40/75	1000	79
3S8W_1212S1.5RP	12	9-18	22	12	250	13	70/100	680	82
3S8W_1215S1.5RP	12	9-18	22	15	200	10	70/100	470	83
3S8W_1224S1.5RP	12	9-18	22	24	125	6	100/150	330	81
3S8W_2403S1.5RP	24	18-36	40	3.3	758	38	40/75	2700	74
3S8W_2405S1.5RP	24	18-36	40	5	600	30	40/75	2200	81
3S8W_2409S1.5RP	24	18-36	40	9	333	17	40/75	1000	83
3S8W_2412S1.5RP	24	18-36	40	12	250	13	40/75	680	83
3S8W_2415S1.5RP	24	18-36	40	15	200	10	100/150	470	83
3S8W_2424S1.5RP	24	18-36	40	24	125	6	100/150	330	83
3S8W_4803S1.5RP	48	36-75	80	3.3	758	38	100/150	2700	75
3S8W_4805S1.5RP	48	36-75	80	5	600	30	40/75	2200	76
3S8W_4812S1.5RP	48	36-75	80	12	250	13	40/75	680	80
3S8W_4815S1.5RP	48	36-75	80	15	200	10	40/75	470	84
3S8W_4824S1.5RP	48	36-75	80	24	125	6	70/100	330	82


Part Number	Input Voltage [VDC]			Output Voltage [VDC]	Output Current [mA]		Ripple&Noise [mVp-p, Typ./Max.]	Capacitive load ²⁾ [μF, Max.]	Efficiency [%, Typ.]
	Nominal	Range	Max ¹⁾		Max	Min			
3S8W_0505D1.5RP	5	4.5-9	11	±5	±250	±13	40/75	1000	74
3S8W_0512D1.5RP	5	4.5-9	11	±12	±104	±5	40/75	470	77
3S8W_0515D1.5RP	5	4.5-9	11	±15	±83	±4	40/75	330	77
3S8W_0524D1.5RP	5	4.5-9	11	±24	±52	±3	40/75	220	76
3S8W_1205D1.5RP	12	9-18	22	±5	±300	±15	40/75	1000	78
3S8W_1209D1.5RP	12	9-18	22	±9	±167	±8	40/75	680	78
3S8W_1212D1.5RP	12	9-18	22	±12	±125	±6	40/75	470	79
3S8W_1215D1.5RP	12	9-18	22	±15	±100	±5	40/75	330	80
3S8W_2405D1.5RP	24	18-36	40	±5	±300	±15	40/75	1000	79
3S8W_2409D1.5RP	24	18-36	40	±9	±167	±8	40/75	680	81
3S8W_2412D1.5RP	24	18-36	40	±12	±125	±6	40/75	470	83
3S8W_2415D1.5RP	24	18-36	40	±15	±100	±5	40/75	330	83
3S8W_4805D1.5RP	48	36-75	80	±5	±300	±15	100/150	1000	79
3S8W_4812D1.5RP	48	36-75	80	±12	±125	±6	40/75	470	82
3S8W_4815D1.5RP	48	36-75	80	±15	±100	±5	40/75	330	82

¹⁾ Absolute maximum rating without damage on the converter, but it isn't recommended; ²⁾ For dual output converter, the given value is the same for each output.





3S8W_1.5RP series

3W - Dual/Single Output - Wide Input - Isolated & Regulated
DC-DC Converter

Typical characteristics

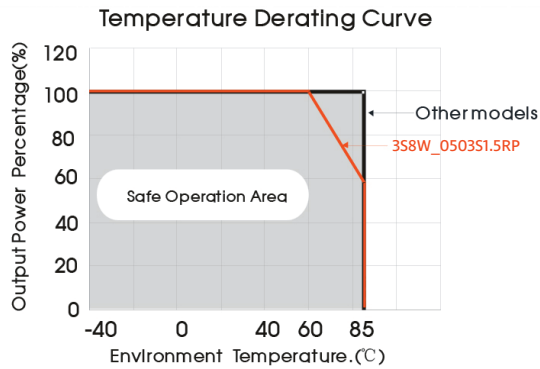

Efficiency

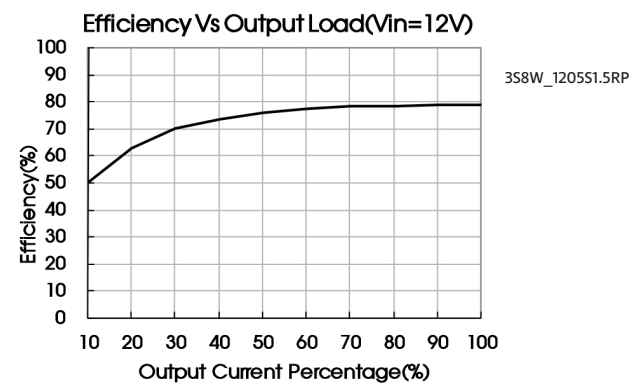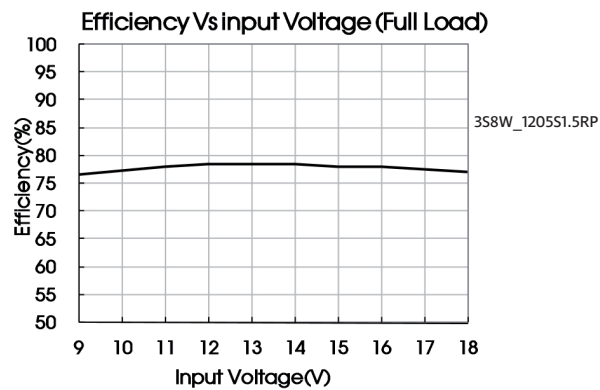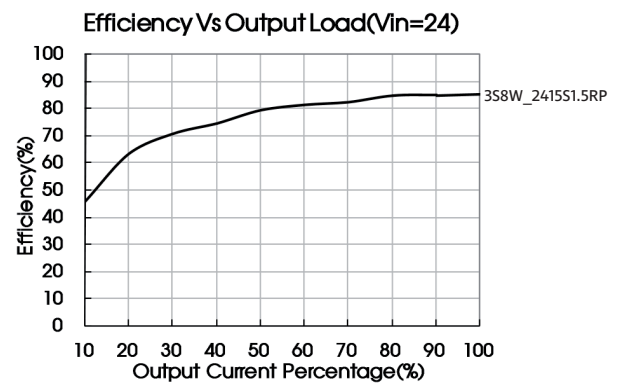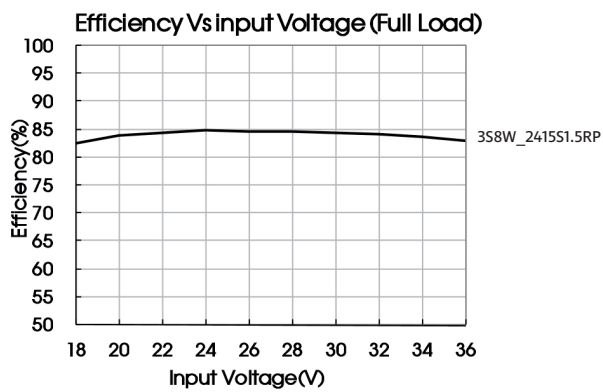

3S8W_1.5RP series

3W - Dual/Single Output - Wide Input - Isolated & Regulated
DC-DC Converter


Recommended circuit

All the DC/DC converters of this series are tested according to the recommended circuit before delivery.


If a further decrease of the input and output ripple is required, properly increase the input & output of additional capacitors Cin1, Cin2, Cs and Cout; or select capacitors of low equivalent impedance like

series capacitor, etc. Cs is used to reduce ripple. No need to add Cs, if ripple meets the demand. Appropriate filter capacitance shall be chosen, start-up problems may be caused if the capacitance is too large. For each output circuit, under the condition of safe and reliable operation, the max. capacity of its filter capacitor should be lower than the

Single

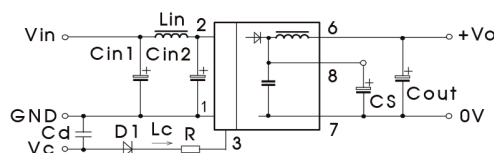


Dual

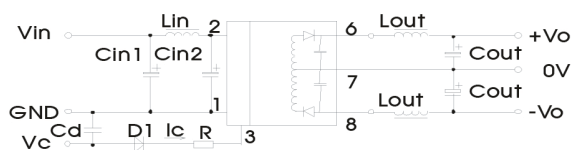

Vin	5VDC&12VDC	24VDC&48VDC
Cin1	100μF	10μF
Cin2	47μF	1μF
Lin	4.7μH~12μH	
Cs	10μF~22μF	
Cout	100μF(Typ.)	
Lout	2.2μH~10μH	
Cd	47nF/100V	

EMC solution-recommended circuit

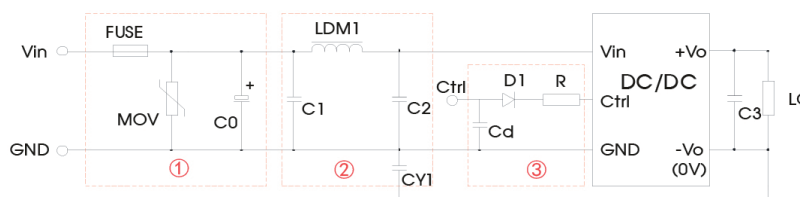

Parameter description:

Model	Vin: 5V	Vin: 12V	Vin: 24V	Vin: 48V
FUSE	Slow blow, selecting based on needs			
MOV	-	S14K20	S20K30	S14K60
LDM1	12μH			
C0	680μF/25V		330μF/50V	330μF/100V
C1, C2	4.7μF/50V			4.7μF/100V
C3	Refer to the Cout in figure 2			
CY1	1nF/2KV			
D1	RB160M-60/1A			
R	In accordance with the formula: $R = \frac{V_c - V_D - 1.0}{I_c} - 300$			
Cd	47nF/100V			

Note:

- Part ① is used for EMS test, part ② is used for EMI filtering. Choose according to requirements.
- Vc is the voltage of the Ctrl end relative to the GND of the input grounding; VD is the positive-going conduction pressure drop of D1; IC is the current flows into the Ctrl end and its value is generally 5-10mA, see part ③ for the peripheral circuit of Ctrl end;
- If there is no recommended parameters, no external component is required.

3S8W_1.5RP series

3W - Dual/Single Output - Wide Input - Isolated & Regulated
DC-DC Converter

Ctrl end

The modules are of normal output when the Ctrl end is suspended or of high resistance; the modules turn off when connecting with high level (relative to the input grounding); notice that the current flows into the pin shall be 5 - 10mA, the modules will be permanently damaged if the current exceeds its max. value (20mA in general).

The value of R can be derived as follows:


$$R = \frac{V_c - V_D - 1.0}{I_C} - 300$$

For detailed parameters, please refer to EMC solution-recommended circuit in this manual.

Input current

When the electricity is provided by the unstable power supply, please make sure that the range of the output voltage fluctuation and the ripple voltage of the power supply do not exceed the indicators of the modules. Input current of power supply should afford the flash startup current of this kind of DC/DC module.

Generally: Vin= 5V series Iave = 1296mA
Vin=12V series Iave = 631mA
Vin=24V series Iave = 363mA
Vin=48V series Iave =157mA



Output load requirements


When using, the minimum load of the module output should not be less than 5% of the nominal load. In order to meet the performance parameters of this datasheet, please connect a 5% dummy load in parallel at the output end, the dummy load is generally a resistor, please

note that the resistor needs to be used in derating.

3S8W_1.5RP series

3W - Dual/Single Output - Wide Input - Isolated & Regulated
DC-DC Converter

Mechanical dimensions

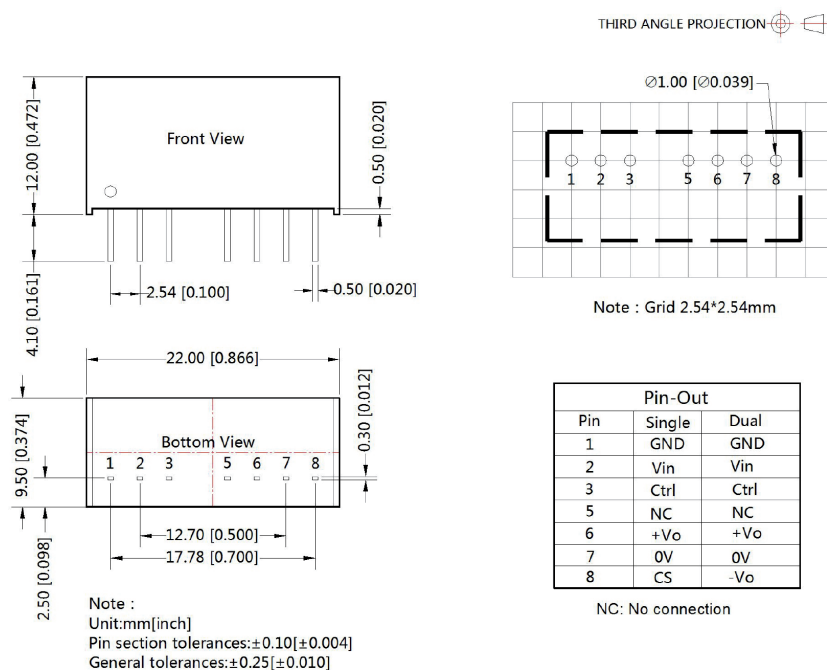

Note:

1. Min. load shouldn't be less than 5%, otherwise ripple maybe increased dramatically. If the product operates under min. load, it may not be guaranteed to meet all specifications listed. Operation under minimum load will not damage the converter.
2. Recommended Dual output models unbalanced load is $\leq \pm 5\%$, if the product operates $> \pm 5\%$, it may not be guaranteed to meet all specifications listed. Please contact our technical support for more details.
3. Max. Capacitive Load is tested at input voltage range and full load.
4. All specifications measured at $T_a = 25^\circ\text{C}$, humidity $< 75\%$, nominal input voltage and rated output load unless otherwise specified.
5. In this datasheet, all test methods are based on our corporate standards.
6. All characteristics are for listed models, and non-standard models may perform differently. Please contact our technical support for more details.
7. Please contact our technical support for any specific requirement.
8. Specifications of this product are subject to changes without prior notice.