

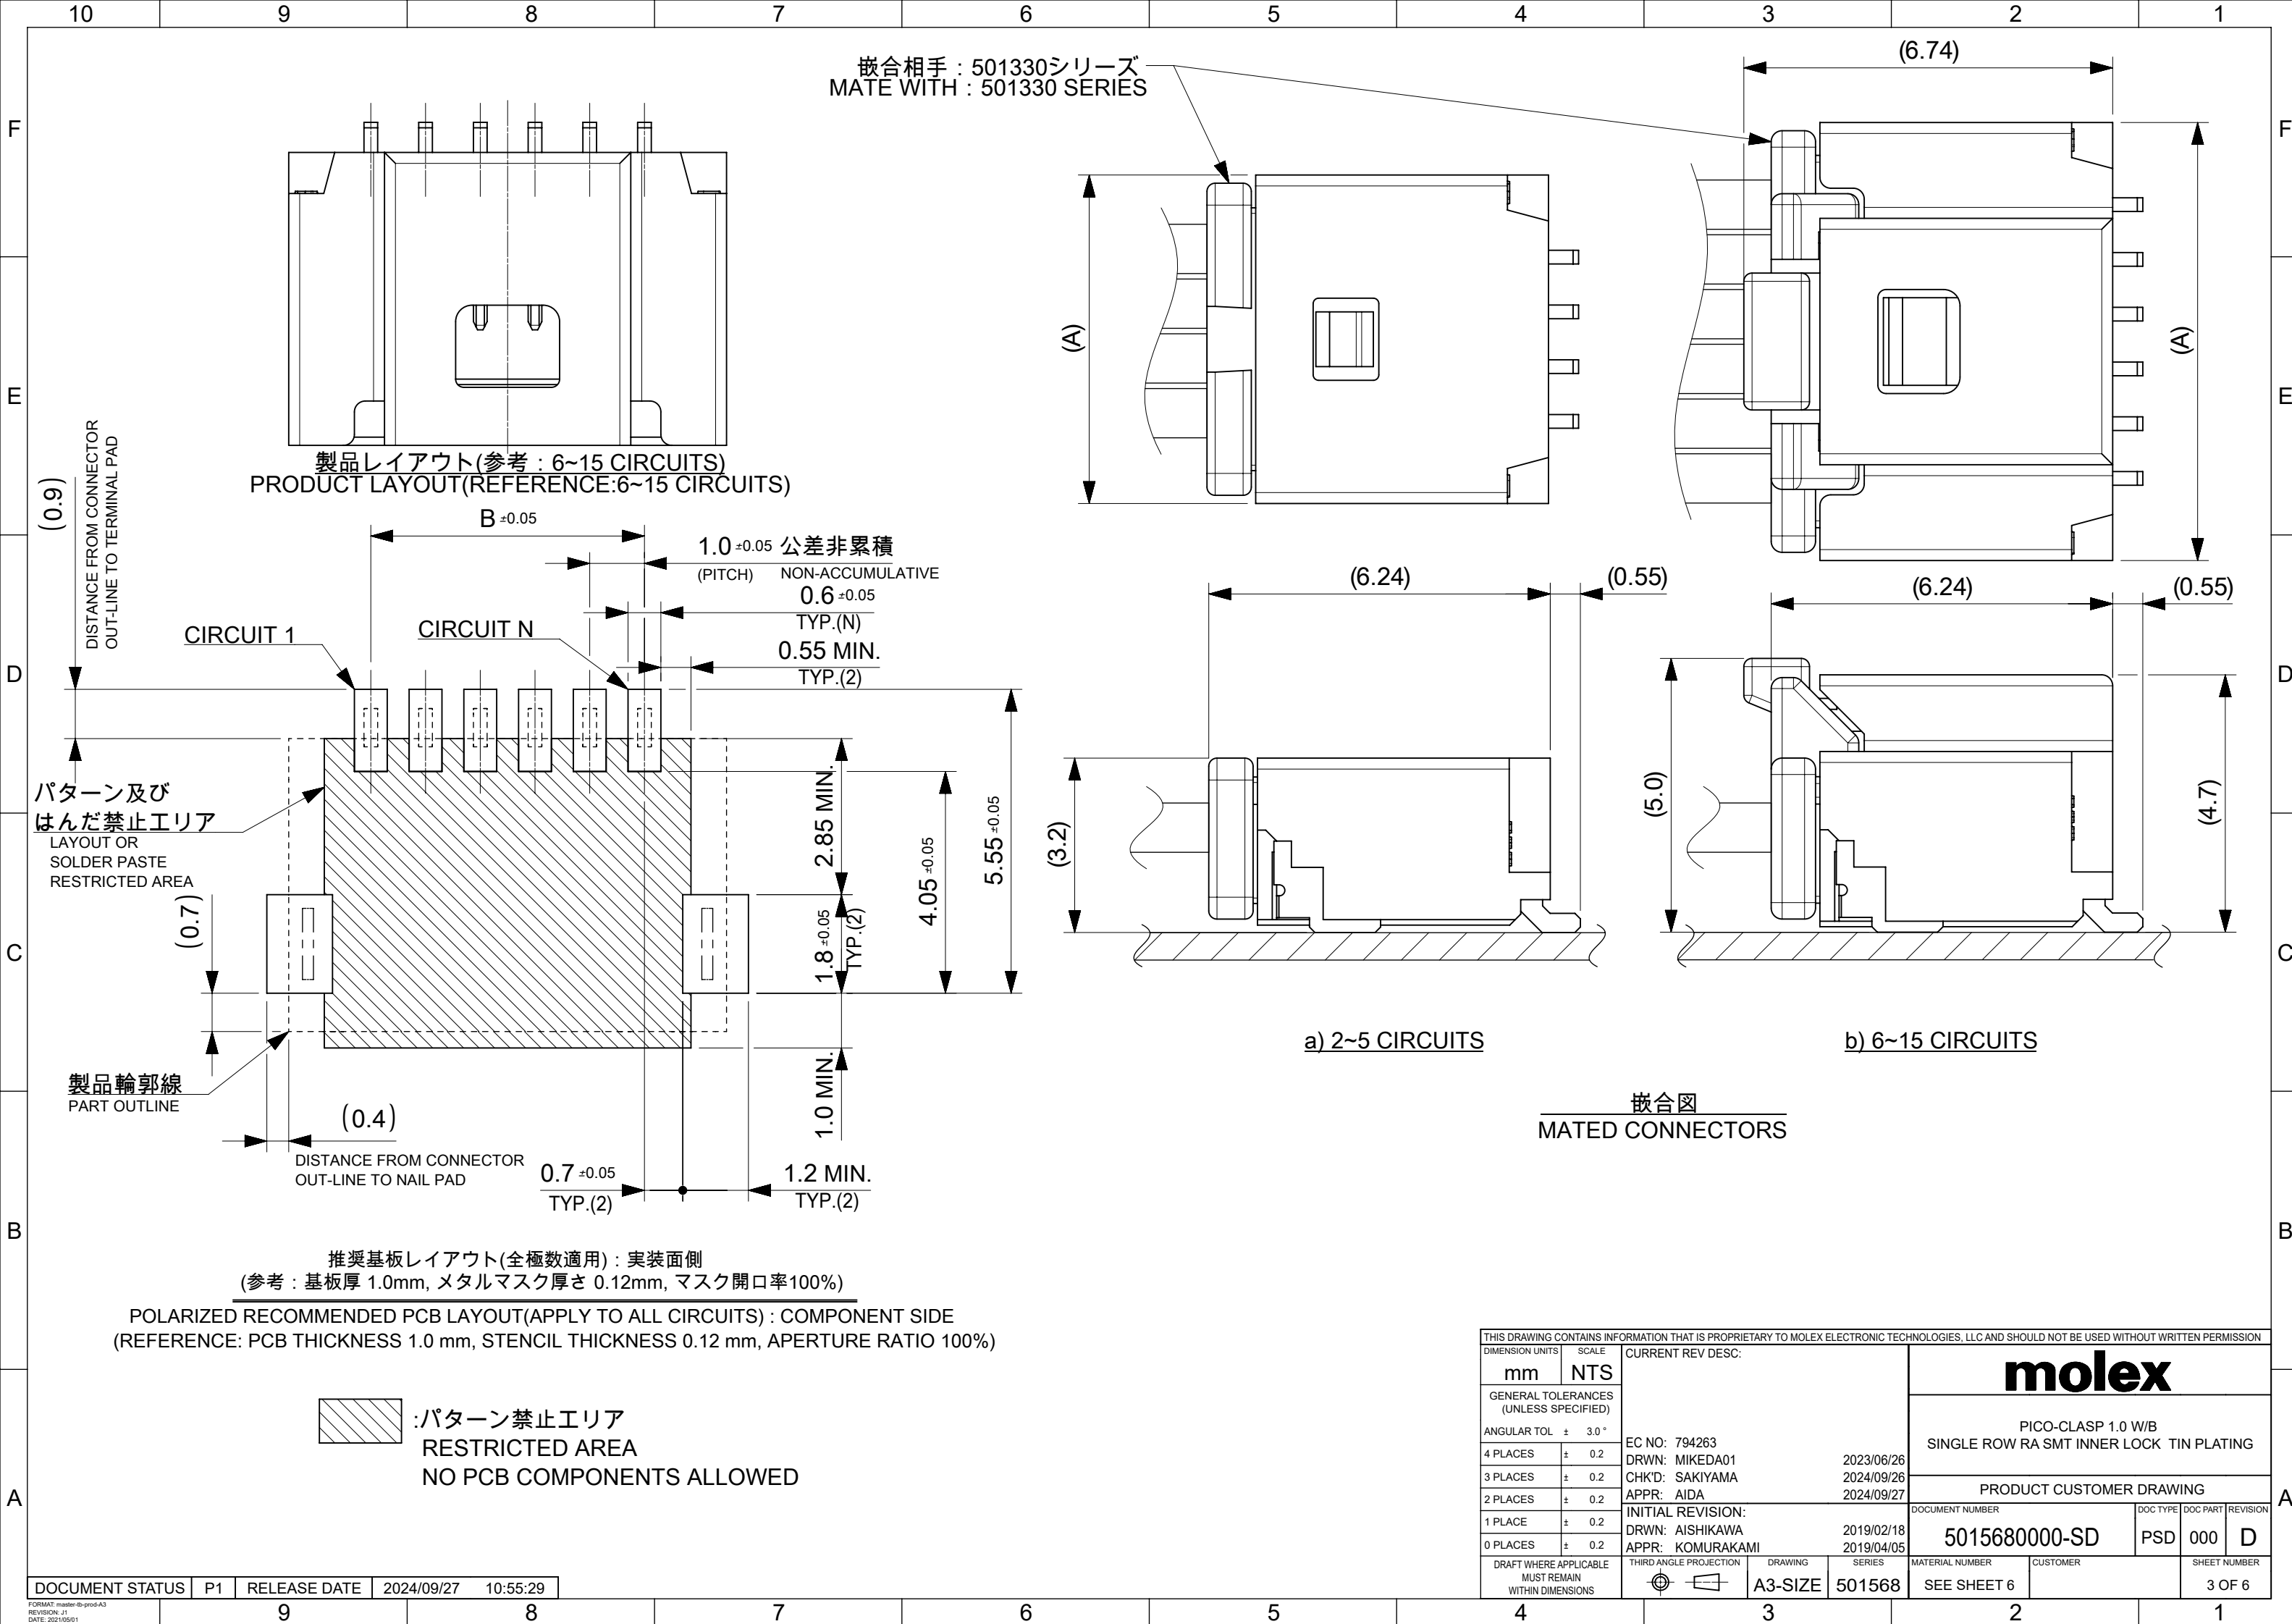


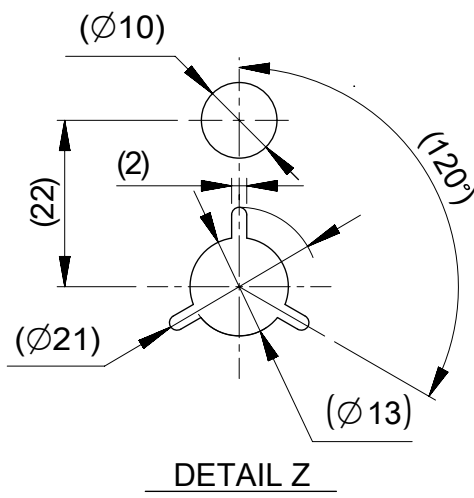


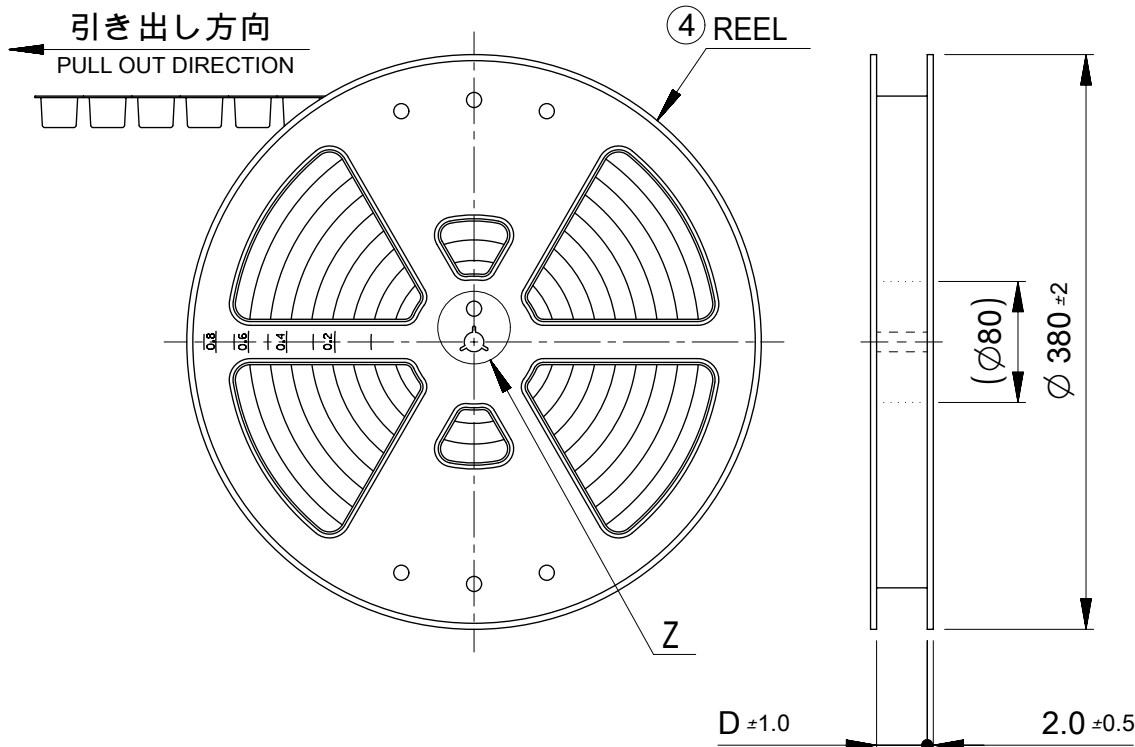

NOTES

10. 梱包数量
2-5 CIRCUIT: 1700個/リール
6-15 CIRCUIT: 1300個/リール
NUMBER OF CONNECTORS
2-5 CIRCUIT : 1700 PIECES/REEL
6-15 CIRCUIT : 1300 PIECES/REEL

11. リードテープ長さ
LEAD TAPE LENGTH

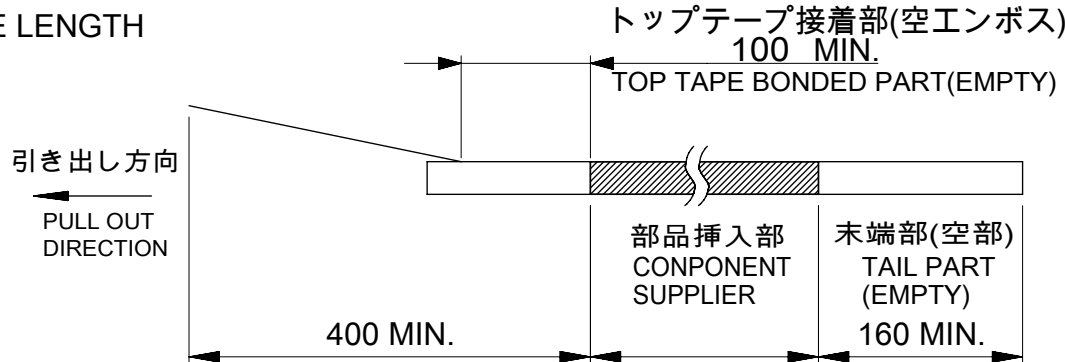

12. トップテープの剥離強度はIEC60286-3に準拠。
TOP TAPE PEELING FORCE IS DEFINED BY IEC60286-3.
△13 2~5極品は乾燥剤入り、ハイバリア梱包による納品となります。
2~5 CIRCUITS IS DELIVERED IN A HIGH BARRIER PACKAGING WITH DESICCANT.
14. 梱包仕様書 : SPK-501568-001
PACKAGE SPECIFICATION:
△15 発注番号 : SHEET 6 参照
ORDER No. : PLEASE REFER TO SHEET 6 FOR PRODUCT LIST.


501568 - ** * *

極数 CIRCUIT SIZE	ハウジングカラー HOUSING COLOR	製品識別番号 IDENTIFICATION NUMBER
	0:NATURAL(BEIGE)	7:EMBOSSED PACKAGE

番号 NO.	部品 PART	材質 MATERIAL
④	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>

DOCUMENT STATUS	P1	RELEASE DATE	2024/09/27	10:55:29
-----------------	----	--------------	------------	----------


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex								
mm		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)							PICO-CLASP 1.0 W/B SINGLE ROW RA SMT INNER LOCK TIN PLATING								
ANGULAR TOL ± 3.0 °							PRODUCT CUSTOMER DRAWING								
4 PLACES ± 0.2							DOCUMENT NUMBER 5015680000-SD			DOC TYPE PSD	DOC PART 000	REVISION D			
3 PLACES ± 0.2				EC NO: 794263 DRWN: MIKEDA01 2023/06/26 CHK'D: SAKIYAMA 2024/09/26 APPR: AIDA 2024/09/27											
2 PLACES ± 0.2				INITIAL REVISION: DRWN: AISHIKAWA 2019/02/18 APPR: KOMURAKAMI 2019/04/05											
1 PLACE ± 0.2															
0 PLACES ± 0.2															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 		DRAWING A3-SIZE		SERIES 501568		MATERIAL NUMBER SEE SHEET 6		CUSTOMER		SHEET NUMBER 4 OF 6	

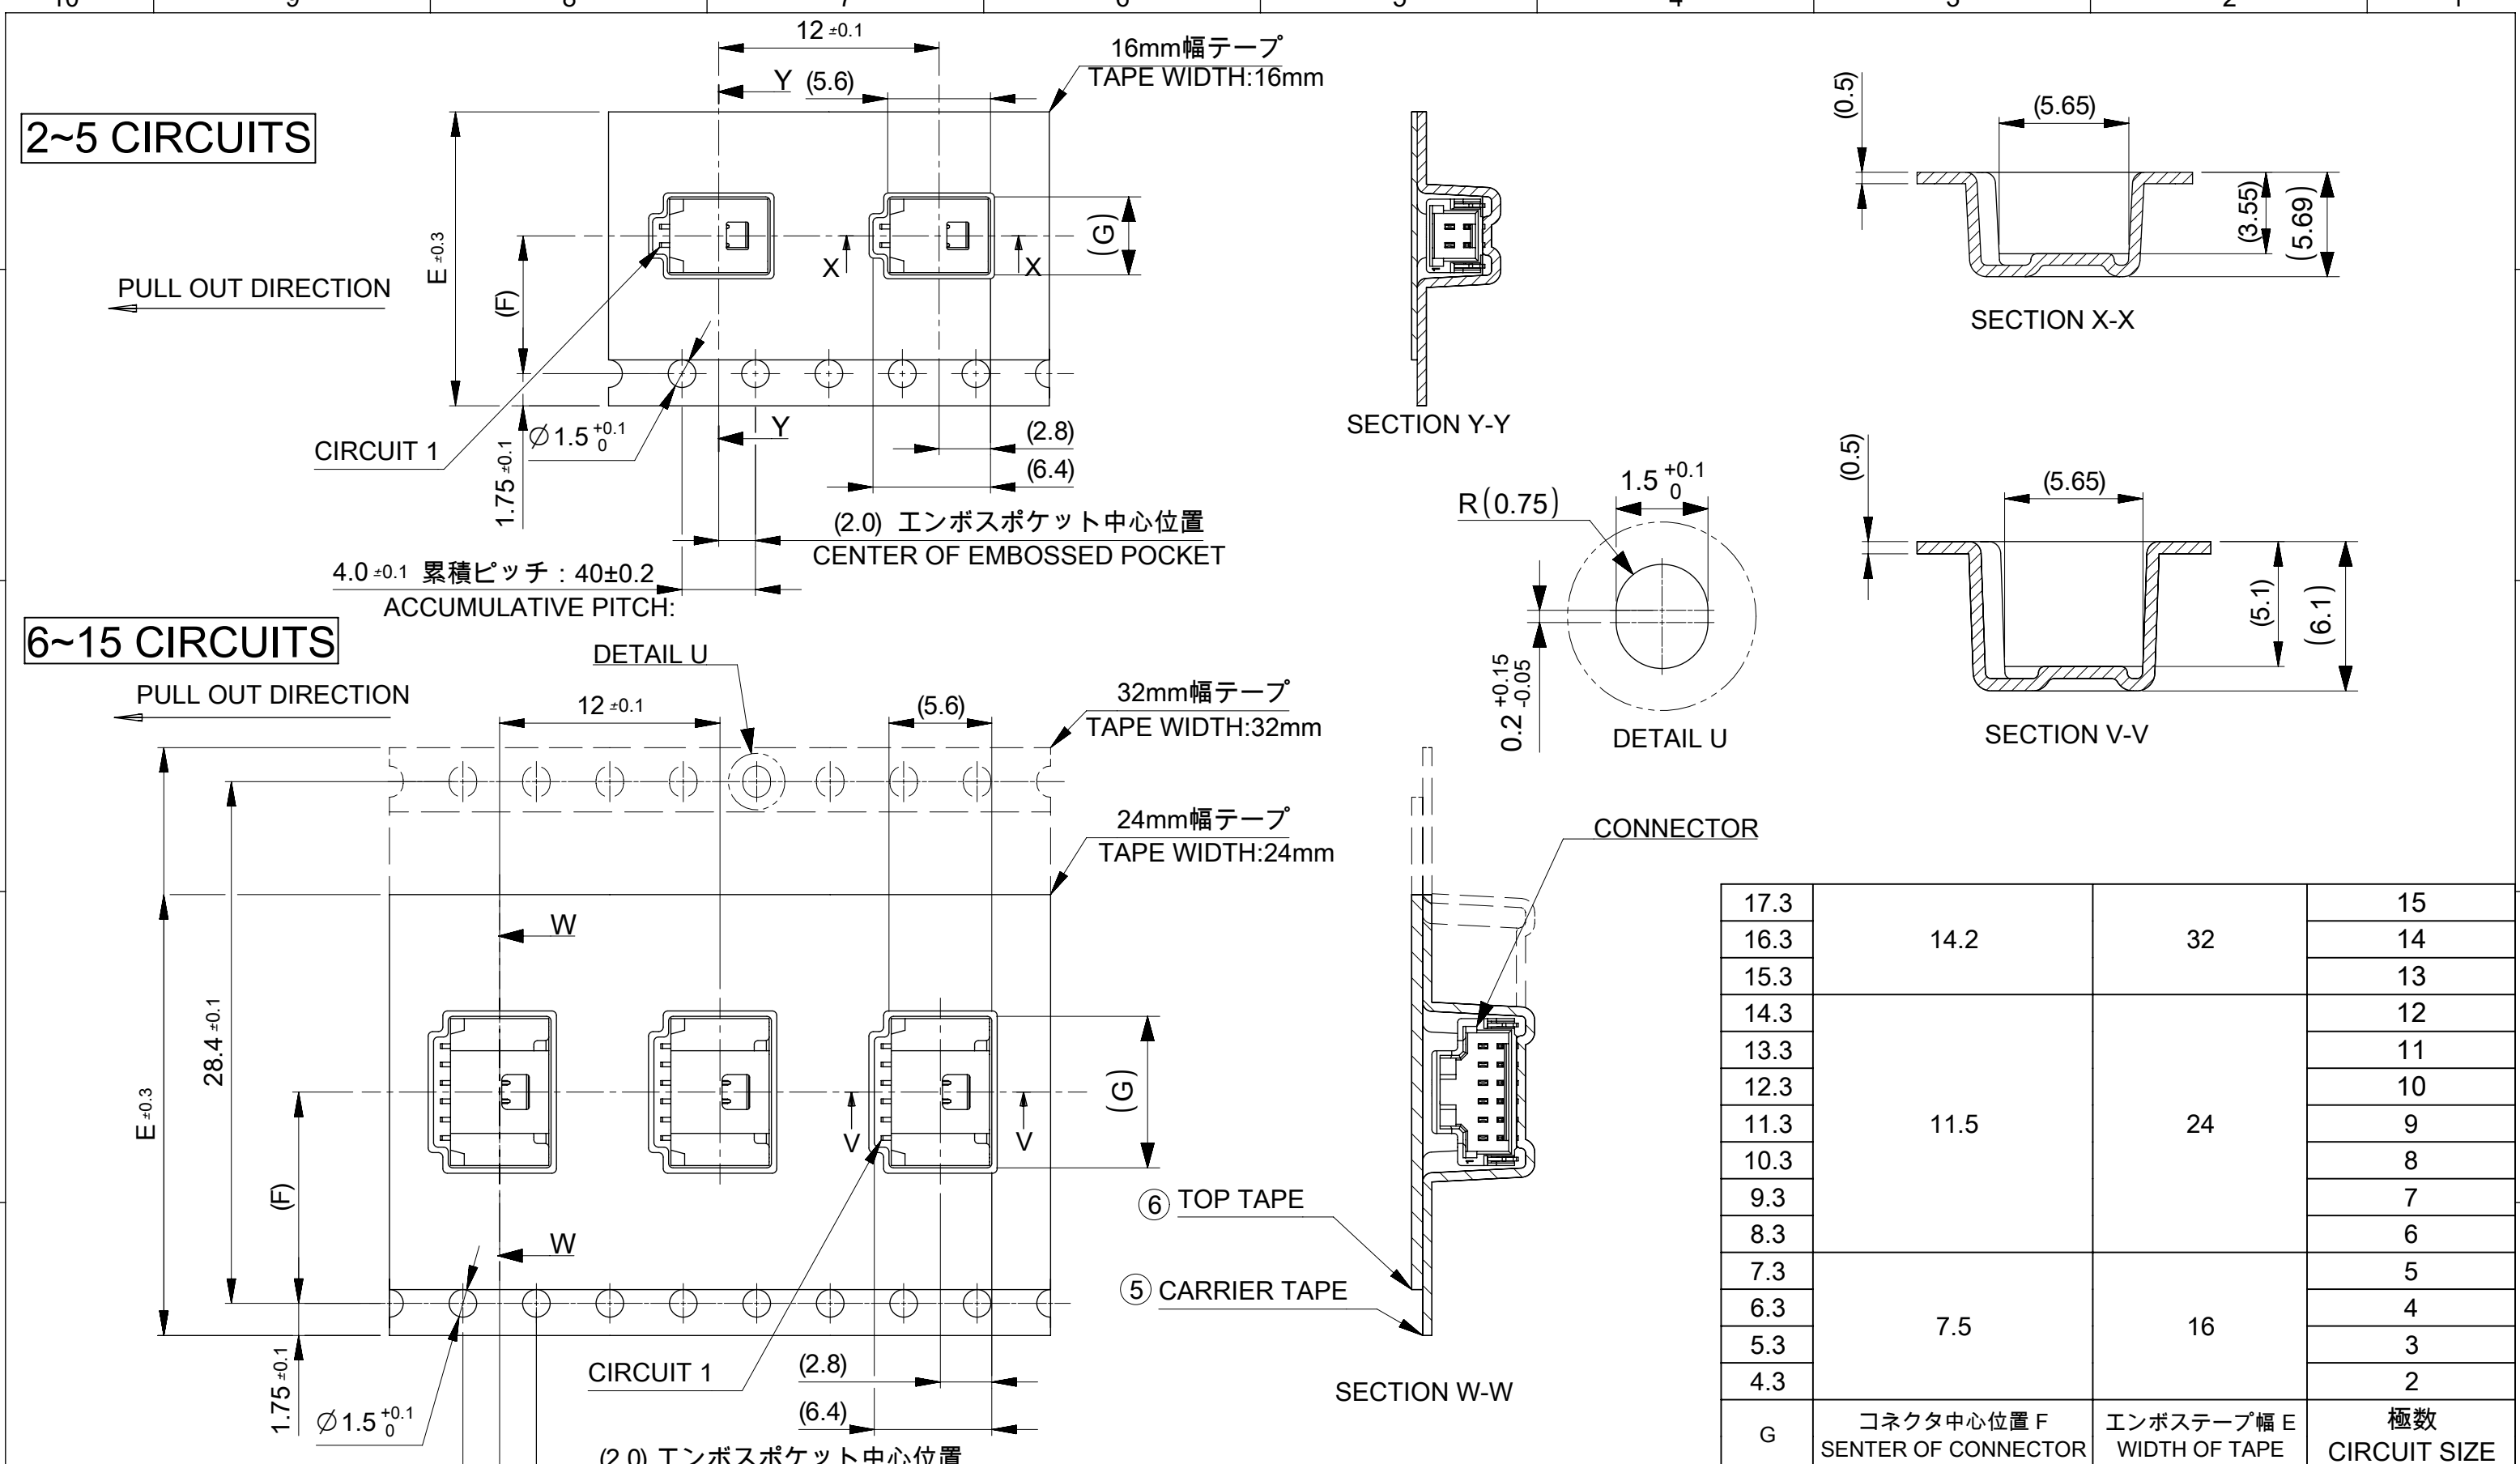

17.3	14.2	32	15
16.3			14
15.3			13
14.3	11.5	24	12
13.3			11
12.3			10
11.3			9
10.3			8
9.3	7.5	16	7
8.3			6
7.3			5
6.3			4
5.3			3
4.3			2
G	コネクタ中心位置 F SENER OF CONNECTOR	エンボステープ幅 E WIDTH OF TAPE	極数 CIRCUIT SIZE

番号 NO.	部品 PART	材質 MATERIAL
⑤	キャリアテープ CARRIER TAPE	ポリプロピレン(PP)、その他 POLYPROPYLENE(PP), etc
⑥	トップテープ TOP TAPE	ポリエチレン(PE)、その他 POLYETHYLENE(PE), etc

DOCUMENT STATUS	P1	RELEASE DATE	2024/09/27	10:55:29
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex		
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)							PICO-CLASP 1.0 W/B SINGLE ROW RA SMT INNER LOCK TIN PLATING		
ANGULAR TOL ± 3.0 °									
EC NO: 794263							PRODUCT CUSTOMER DRAWING		
4 PLACES		± 0.2		DOCUMENT NUMBER 5015680000-SD					
3 PLACES		± 0.2							
2 PLACES		± 0.2					DOC PART 000		
1 PLACE		± 0.2		REVISION D					
0 PLACES		± 0.2					SHEET NUMBER 5 OF 6		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				INITIAL REVISION:					
				DRWN: AISHIKAWA 2019/02/18					
THIRD ANGLE PROJECTION 				DRAWING A3-SIZE					
				SERIES 501568					
MATERIAL NUMBER SEE SHEET 6				CUSTOMER					

