

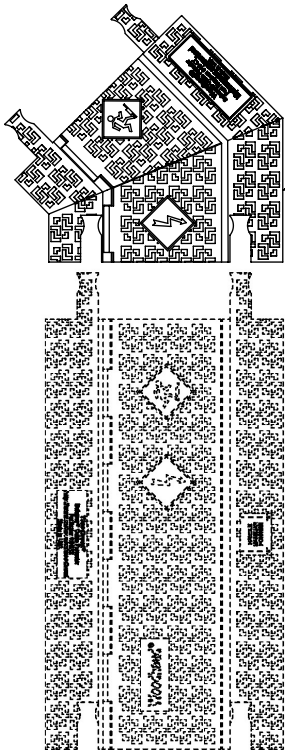


10	9	8	7	6	5	4	3	2	1
PART NUMBER	Woodhead® ENGINEERING NUMBER		LID COLOR						
1301380118	610-LT		SAFETY ORANGE (PER ANSI Z535.1-2006)						
1301380188	610-LT-BLK		BLACK						

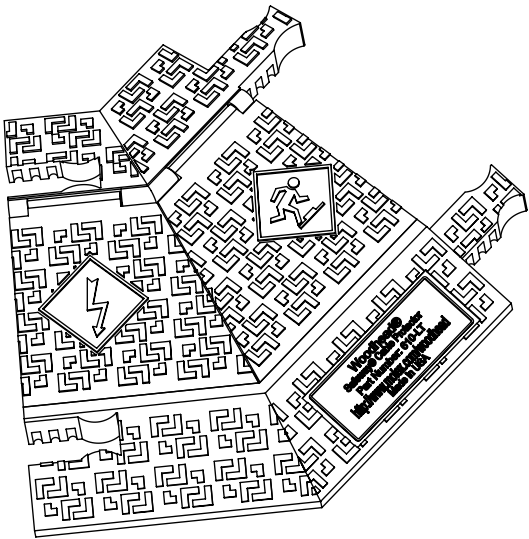


Left Turn:
Each left turn piece allows a 45° change in direction of the cable run. Turn pieces connect directly to the end of the cable protectors. Multiple left turns may be used in combination to produce a 90° or greater change in direction of the cable run.

SAFETY WARNING SYMBOLS
(PER ANSI Z535.3-2011)

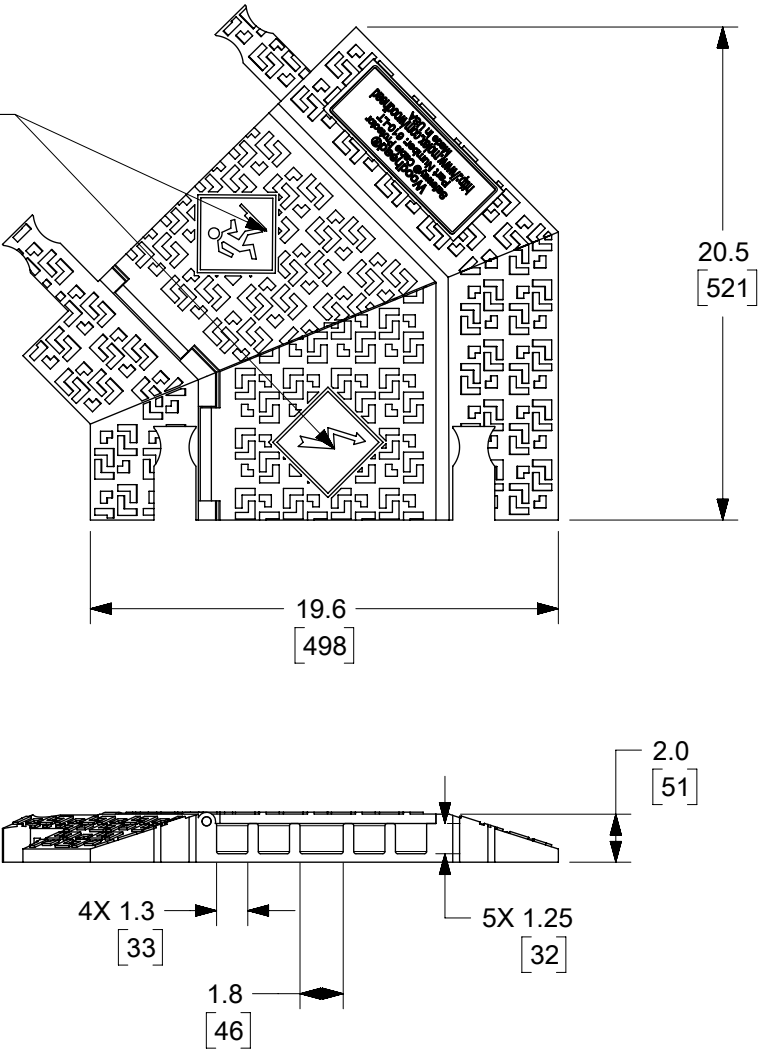

ISOMETRIC VIEWS

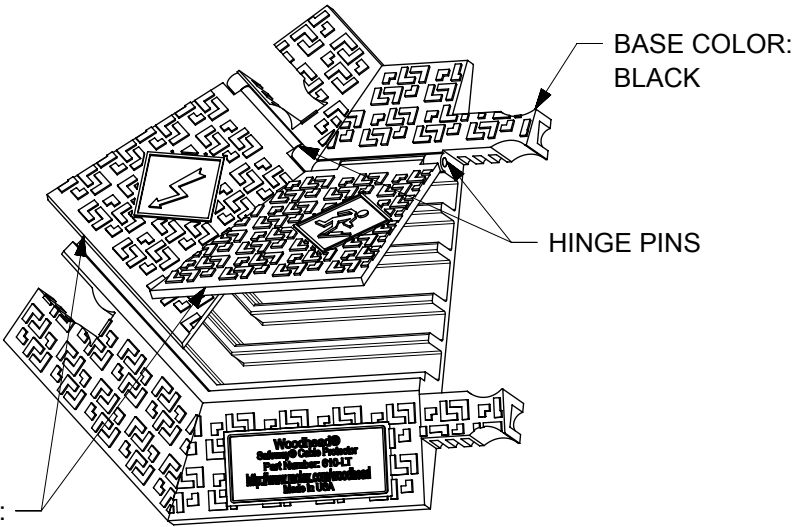

LID COLOR:
SEE CHART

NOTES:

- 1) MATERIAL:
BASE/LID: HEAVY-DUTY, NON-CONDUCTIVE POLYURETHANE, UV STABILIZED
HINGE PIN: REINFORCED FIBERGLASS
- 2) WEIGHT: 15.5 LBS/ 7 KG ±10%
- 3) LOAD CAPACITY PER TIRE/AXLE: 16,300 LBS PER TIRE/32,600 LBS PER AXLE AT 70°F
- 4) OPERATING TEMPERATURE: -40°F TO 120°F (-40°C TO 48°C)
- 5) ENGINEERNG NO.: SEE CHART
- 6) ROHS COMPLIANT

DOCUMENT STATUS	P1	RELEASE DATE	2018/04/03	13:37:49
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATE NOTE 2				molex				
INCH		1:8										
GENERAL TOLERANCES (UNLESS SPECIFIED)				5 CHANNEL 45° LEFT TURN SAFEWAY® CABLE PROTECTOR								
ANGULAR TOL ± 3.0 °												
4 PLACES		± 0.25										
3 PLACES		± 0.25										
2 PLACES		± 0.25		PRODUCT CUSTOMER DRAWING								
1 PLACE		± 0.25										
0 PLACES		± 0.25		DOCUMENT NUMBER				DOC TYPE	DOC PART	REVISION		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				INITIAL REVISION:				1301380118		PSD	000	D
				EC NO: 174322								
THIRD ANGLE PROJECTION				DRWN: WLEUNG				2018/03/26				
				CHK'D: DNGUYEN62				2018/04/02				
				APPR: BRUPERT				2018/04/03				
DRAWING				DRWN: WLEUNG				2016/04/18				
				APPR: BWOODMAN				2016/04/28				
B-SIZE				SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		
				130138		SEE CHART				1 OF 1		