





10	9	8	7	6	5	4	3	2	1
PART NUMBER	Woodhead® ENGINEERING NUMBER		LID COLOR						
1301380189	610-RT-BLK		BLACK						

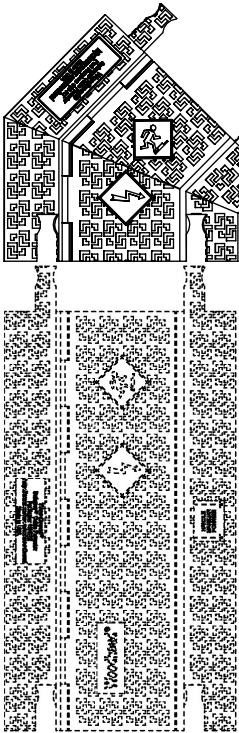


RightTurn:
Each right turn piece allows a 45° change in direction of the cable run. Turn pieces connect directly to the end of the cable protectors. Multiple right turns may be used in combination to produce a 90° or greater change in direction of the cable run.

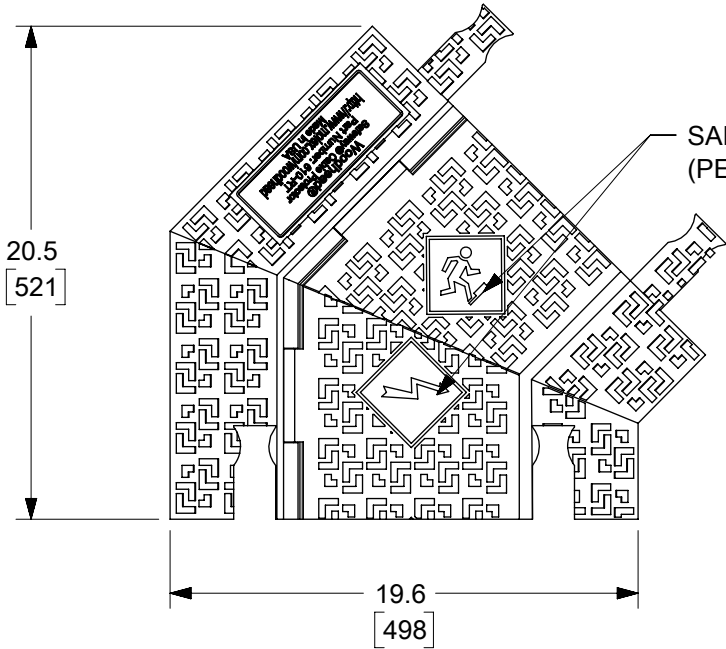

SAFETY WARNING SYMBOLS
(PER ANSI Z535.3-2011)

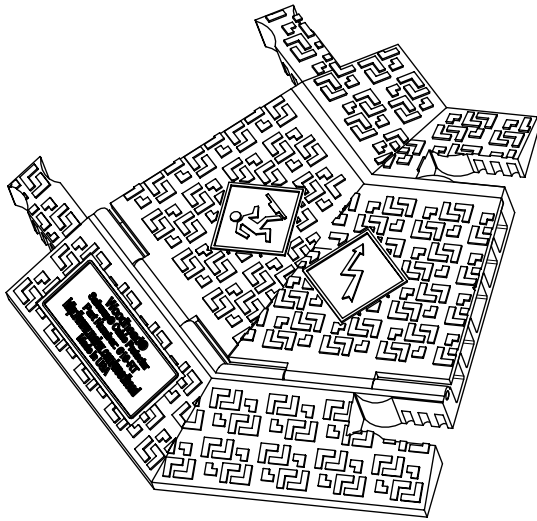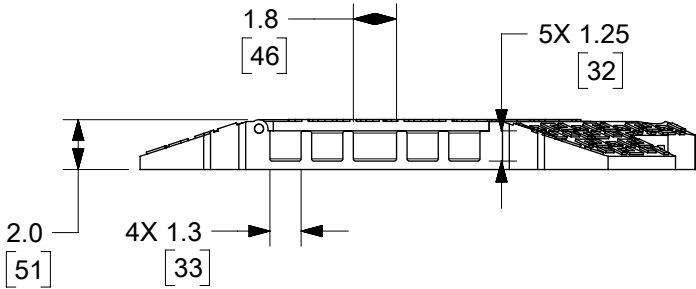

ISOMETRIC VIEWS

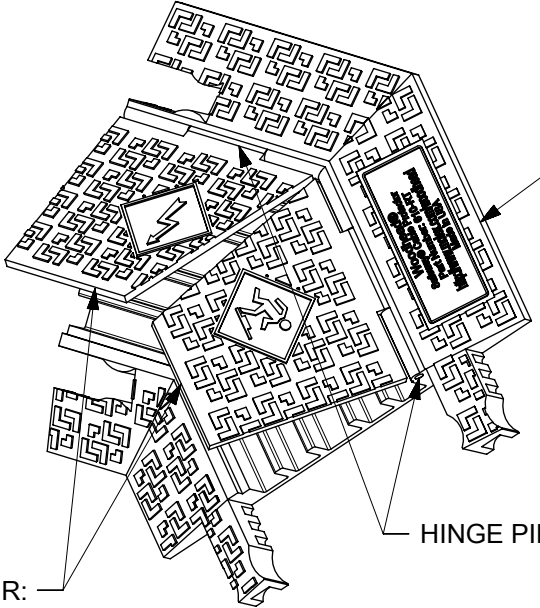

BASE COLOR:
BLACK

HINGE PINS

LID COLOR:
SEE CHART

- NOTES:
- 1) MATERIAL:
BASE/LID: HEAVY-DUTY, NON-CONDUCTIVE POLYURETHANE, UV STABILIZED
HINGE PIN: REINFORCED FIBERGLASS
 - 2) WEIGHT: 15.5 LBS/ 7 KG ±10%
 - 3) LOAD CAPACITY PER TIRE/AXLE: 16,300 LBS PER TIRE/32,600 LBS PER AXLE AT 70°F
 - 4) OPERATING TEMPERATURE: -40°F TO 120°F (-40°C TO 48°C)
 - 5) ENGINEERNG NO.: SEE CHART
 - 6) ROHS COMPLIANT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS	SCALE	CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#517918							
INCH	1:8								
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL	± 3.0 °								
4 PLACES	± 0.25								
3 PLACES	± 0.25								
2 PLACES	± 0.25								
1 PLACE	± 0.25								
0 PLACES	± 0.25								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER		
			B-SIZE	130138	SEE CHART		1 OF 1		

DOCUMENT STATUS		P1	RELEASE DATE	2026/04/02	12:43:33
-----------------	--	----	--------------	------------	----------