


MD100ERW Series

2:1 Input, 1W SIP, Single & Dual Output DC/DC Converters

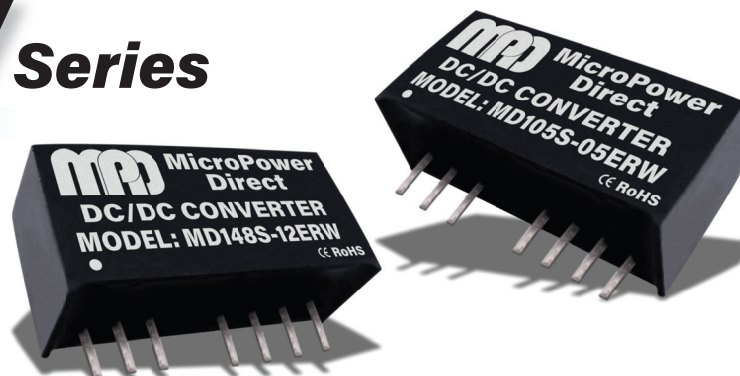

Key Features:

- 1W Output Power
- 2:1 Input Voltage Range
- Short Circuit Protected
- Tight Line/Load Regulation
- 1,500 VDC Isolation
- 29 Standard Models
- Miniature SIP Case
- -40°C to +85°C Operation
- Industry Standard Pin-Out
- **Low Cost**



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226

F: (781) 344-8481

E: sales@micropowerdirect.com

W: www.micropowerdirect.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input					
Parameter	Conditions	Min.	Typ.	Max.	Units
Input Start Voltage	5 VDC Input			4.5	VDC
	12 VDC Input			9.0	
	24 VDC Input			18.0	
	48 VDC Input			36.0	
Reflected Ripple Current	5 VDC Input		30		mA
	12 VDC Input		40		
	24 VDC Input		55		
	48 VDC Input		45		
Input Filter	Capacitor Filter				

Output						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Output Voltage Accuracy, See Note 1	3.3 V _{OUT} & 5 V _{OUT}		±2.0	±5.0	%	
	All Other Outputs		±1.0	±3.0		
No Load Output Voltage Accuracy	See Note 2		±1.5	±5.0	%	
Line Regulation	Full Load, V _{IN} = Min to Max		±0.2	±0.5	%	
Load Regulation	I _{OUT} = 5% to 100%		±0.4	±0.75	%	
Ripple & Noise, See Note 3	5 VDC Input		70	100	mV P - P	
	12 VDC Input		100	150		
	24 VDC Input		70	100		
	48 VDC Input		100	150		
Transient Recovery Time, See Note 4	25% Load Step Change		0.5	2.0	mSec	
Transient Response Deviation			±2.5	±5.0	%	
Temperature Coefficient			±0.02	±0.03	%/°C	
Output Short Circuit	Continuous (Autorecovery)					

General						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation Voltage	See Note 5	1,500			VDC	
Isolation Resistance	500 VDC	1,000			MΩ	
Isolation Capacitance	100 kHz/0.1V		120		pF	
Switching Frequency			200		kHz	

Environmental						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Operating Temperature Range	Ambient	-40	+25	+85	°C	
Storage Temperature Range		-55		+125	°C	
Cooling	Free Air Convection					
Humidity	RH, Non-condensing			95	%	

Physical						
Case Size	See Mechanical Drawing (Page 5)					
Case Material	Non-Conductive Black Plastic (UL94-V0)					
Weight	See Mechanical Drawing (Page 5)					

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units	
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	1.0			MHours	

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input			12	VDC
	12 VDC Input			25	
	24 VDC Input			50	
	48 VDC Input			100	
Lead Temperature	1.5 mm From Case for 10 Sec			300	°C

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.


www.micropowerdirect.com

Model Number	Input				Output			Efficiency (% Typ)	Capacitive Load (μF, Max)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA, Typ)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load						
MD105S-03ERW	5	4.5 - 9.0	281	40	3.3	303	16.0	71	1,800	600
MD105S-05ERW	5	4.5 - 9.0	281	40	5.0	200	10.0	72	2,200	600
MD105S-12ERW	5	4.5 - 9.0	281	40	12.0	83	5.0	76	1,000	600
MD105S-15ERW	5	4.5 - 9.0	281	40	15.0	67	4.0	75	680	600
MD105S-24ERW	5	4.5 - 9.0	281	40	24.0	42	3.0	73	470	600
MD105D-05ERW	5	4.5 - 9.0	281	40	±5.0	±100	±5.0	73	1,000	600
MD105D-12ERW	5	4.5 - 9.0	281	40	±12.0	±42	±3.0	76	470	600
MD105D-15ERW	5	4.5 - 9.0	281	40	±15.0	±33	±2.0	75	330	600
MD112S-03ERW	12	9.0 - 18.0	111	15	3.3	303	16.0	75	2,700	220
MD112S-05ERW	12	9.0 - 18.0	111	15	5.0	200	10.0	77	2,200	220
MD112S-12ERW	12	9.0 - 18.0	111	15	9.0	111	6.0	79	1,800	220
MD112S-12ERW	12	9.0 - 18.0	111	15	12.0	83	5.0	79	1,000	220
MD112S-15ERW	12	9.0 - 18.0	111	15	15.0	67	4.0	80	680	220
MD112S-24ERW	12	9.0 - 18.0	111	15	24.0	42	3.0	76	470	220
MD112D-05ERW	12	9.0 - 18.0	111	15	±5.0	±100	±5.0	78	1,000	220
MD112D-12ERW	12	9.0 - 18.0	111	15	±12.0	±42	±3.0	81	470	220
MD112D-15ERW	12	9.0 - 18.0	111	15	±15.0	±33	±2.0	78	330	220
MD124S-03ERW	24	18.0 - 36.0	55	6	3.3	303	16.0	76	2,700	110
MD124S-05ERW	24	18.0 - 36.0	55	6	5.0	200	10.0	77	2,200	110
MD124S-12ERW	24	18.0 - 36.0	55	6	12.0	83	6.0	78	1,000	110
MD124S-15ERW	24	18.0 - 36.0	55	6	15.0	67	4.0	78	680	110
MD124S-24ERW	24	18.0 - 36.0	55	6	24.0	42	3.0	77	470	110
MD124D-05ERW	24	18.0 - 36.0	52	6	±5.0	±100	±5.0	79	1,000	110
MD124D-09ERW	24	18.0 - 36.0	52	6	±9.0	±56	±3.0	79	680	110
MD124D-12ERW	24	18.0 - 36.0	52	6	±12.0	±42	±3.0	79	470	110
MD124D-15ERW	24	18.0 - 36.0	52	6	±15.0	±33	±2.0	79	330	110
MD148S-03ERW	48	36.0 - 75.0	27	4	3.3	303	16.0	75	2,700	75
MD148S-05ERW	48	36.0 - 75.0	27	4	5.0	200	10.0	76	2,200	75
MD148S-12ERW	48	36.0 - 75.0	27	4	12.0	83	5.0	80	1,000	75
MD148S-15ERW	48	36.0 - 75.0	27	4	15.0	67	4.0	79	680	75
MD148D-05ERW	48	36.0 - 75.0	27	4	±5.0	±100	±5.0	76	1,000	75
MD148D-12ERW	48	36.0 - 75.0	27	4	±12.0	±42	±3.0	78	470	75
MD148D-15ERW	48	36.0 - 75.0	27	4	±15.0	±33	±2.0	80	330	75


Notes:

- Output voltage accuracy is specified over a range of 5% to 100% output load.
- No load output voltage accuracy is specified over the product input voltage range.
- When measuring output ripple & noise, it is recommended that an external capacitor (100 μ F typ.) be placed from the +V_{OUT} to the -V_{OUT} pins for single output units and from each output to common for dual output models.
- Transient recovery is measured to within a 1% error band for a load step change of 25%.
- Isolation voltage is specified for a period 60S with a leakage current lower than 1 mA.
- Operation at no-load will not damage the unit, but they may not meet all specifications.
- If the module is powered by an unregulated power source, care must be taken to insure that peak input current requirements of the unit are met to insure proper start up. These are:
5VIN - 445 mA
12 VIN - 205 mA
24 VIN - 104 mA
48 VIN - 53 mA
Contact the factory for more information.
- It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.


Derating Curve

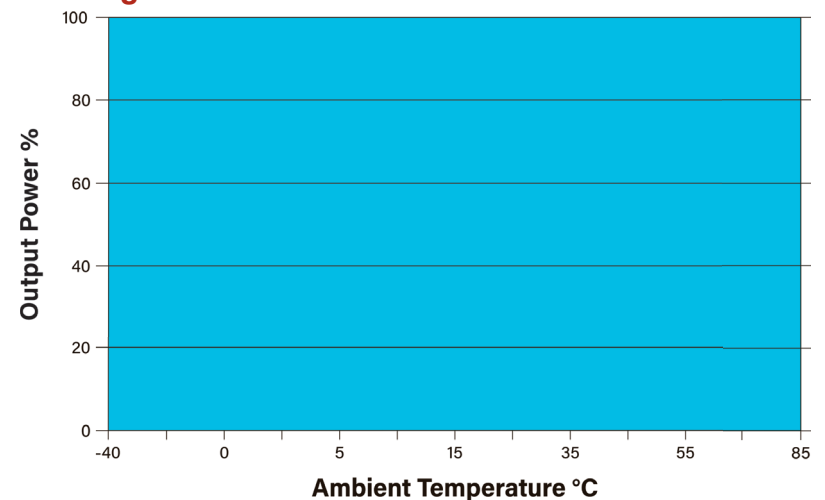


Efficiency vs Input Voltage: Single Output, 24 VIN

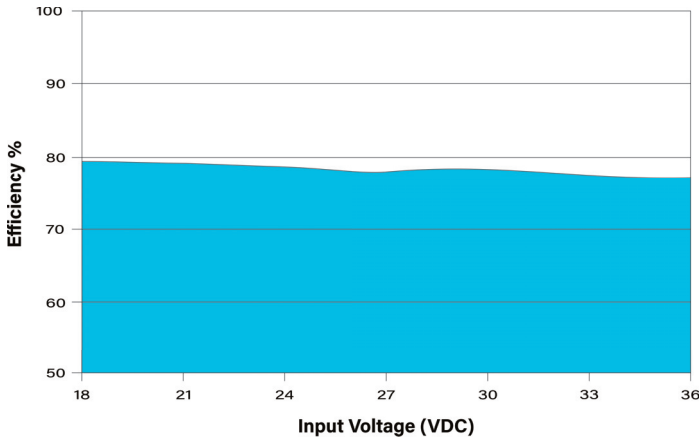


Efficiency vs Output Load: Single Output, 24 VIN

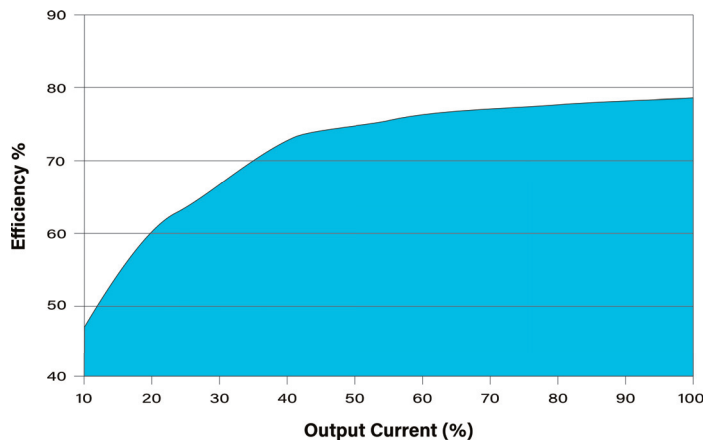

Efficiency vs Input Voltage: Dual Output, 24 VIN

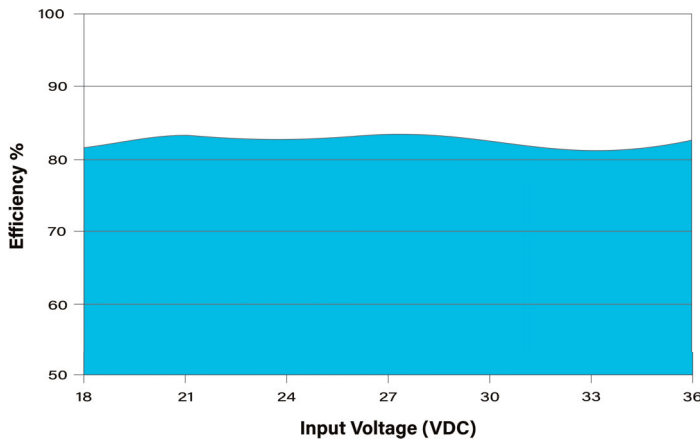

Efficiency vs Output Load: Dual Output, 24 VIN

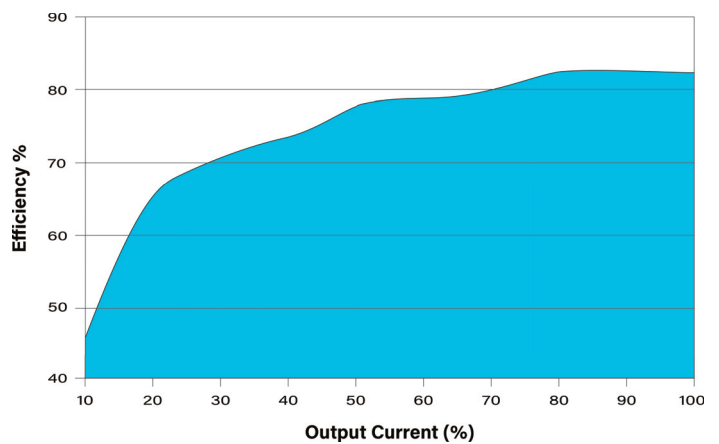

Simple Connection: Single Output



Recommended values for components are:

Component	5 & 12 VIN	24 & 48 VIN
C1	100 μ F	10 μ F
L1	4.7 μ H - 12 μ H	
C2	47 μ F	1.0 μ F
CS	10 μ F - 22 μ F	
C3	100 μ F (Typ)	

The diagram above illustrates a simple connection of the **MD100SERW**. For applications that do not require the circuit to meet EMI/EMC specifications, the input Pi filter and output capacitor (C3) will reduce input/output ripple and improve the converter stability over time and temperature. If further reduction of output ripple is required, capacitor Cs may be added. The recommended component values are given in the table at right.

Efficiency vs Input Voltage: Dual Output



Recommended values for components are:

Component	5 & 12 VIN	24 & 48 VIN
C1	100 μ F	10 μ F
L1	4.7 μ H - 12 μ H	
C2	47 μ F	1.0 μ F
LOUT	2.2 μ F - 10 μ F	
C3	100 μ F (Typ)	
C4	100 μ F (Typ)	

The diagram above illustrates a simple connection of the **MD100DERW**. For applications that do not require the circuit to meet EMI/EMC specifications, the input Pi filter and output LC filters will reduce input/output ripple and improve the converter stability over time and temperature. The recommended component values are given in the table at right.


EMI Characteristics

Parameter	Standard		Criteria	Level
Radiated Emissions	CISPR 32/EN 55032			Class B (See Typical Connection Below)
Conducted Emissions	CISPR 32/EN 55032			Class B (See Typical Connection Below)
ESD		EN 61000-4-2	B	±4 kV Contact
RS		EN 61000-4-3	A	10V/m
EFT	See Note 2	EN 61000-4-4	B	±2 kV
Surge	See Note 3	EN 61000-4-5	B	±2 kV L-L
CS		EN 61000-4-6	A	3 Vrms
Voltage Dips		EN 61000-4-29	B	0% - 70%

Notes:

1. If the application does not require that emissions meet international standards, simply adding capacitors to the input and output circuits may be sufficient to reduce ripple & noise. See the Simple Connection diagram and notes on page 3.
2. To meet the requirements of EN 61000-4-4, external components are needed. The Typical Connection diagram below shows an external input filter that would typically achieve this. Contact the factory for more information.
3. To meet the requirements of EN 61000-4-5, external components are needed. This can be done as shown in the Typical Connection diagram below. Contact the factory for more information.

Typical Connection

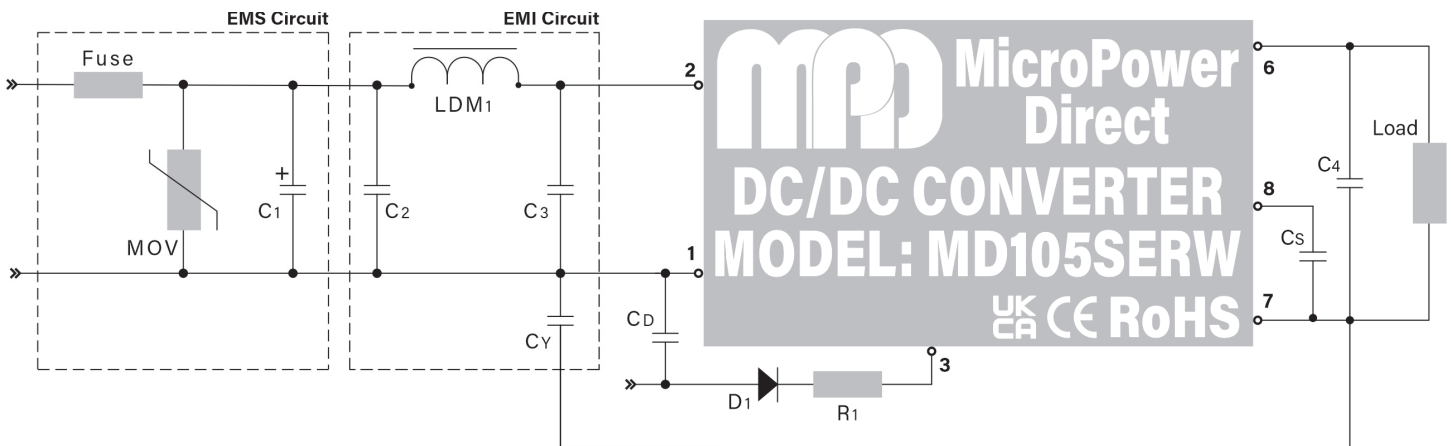

For applications that require meeting EMC standards, the diagram above illustrates a typical connection of the **MD100xERW** series. The units do not require external components to operate as specified. Some notes on this diagram (starting with the input circuit) are:

1. An external fuse should be used in all power module applications. The recommended fuse is shown in the model chart on page 2.
2. To protect against a surge, an external MOV is recommended on the input. A suggested value is given in the table at right.
4. The capacitor CS is required to meet all specifications on single output units.
5. The output filtering capacitor (C4) is a high frequency, low resistance electrolytic capacitor. Care must be taken in choosing this capacitor not to exceed the capacitive load specification for the unit. Voltage derating of capacitors should be 80% or above.
6. In many applications simply adding input/output capacitors will enhance the input surge protection and reduce output ripple sufficiently. The value of the input capacitor can range from 10 μ F to 100 μ F, depending on the needs of the application. The output capacitor would typically be 100 μ F. See the "Simple Connections" on page 3.
7. The capacitor CS provides additional output filtering. If used, a value of 10 μ F to 20 μ F is recommended. This capacitor is not required for specified operation. See the "Simple Connections" on page 3.

6. Recommended values for components are:

Component	5 VIN	12 VIN	24 VIN	48 VIN
MOV	---	S14K25	S14K35	S14K60
C1	1,000 μ F/16V	1,000 μ F/25V	330 μ F/50V	330 μ F/100V
C2	4.7 μ F/50V	4.7 μ F/50V	4.7 μ F/50V	4.7 μ F/100V
LDM1	12 μ H	12 μ H	12 μ H	12 μ H
C3	4.7 μ F/50V	4.7 μ F/50V	4.7 μ F/50V	4.7 μ F/100V
CY	1nF/2 kV	1nF/2 kV	1nF/2 kV	1nF/2 kV
CS	10 μ F - 22 μ F			
C4	100 μ F	100 μ F	100 μ F	100 μ F

Remote ON/OFF Control

The **MD100ERW** may be started or shutdown by the control pin input (pin 3). This input is current controlled. The unit operates when pin 3 is left open. When the input is "high" (current flowing into the pin), the converter shuts down. If used, the input current to this pin should be kept between 5 mA to 10 mA. Exceeding 20 mA on this input or connecting it directly to ground could damage the converter.


The diagram at right gives a suggested input circuit for the control pin. The diode (D1) is an RB160M-60/1A and CD is a 47 nF/100V. The resistor R1 is determined by the formula:

$$R = [(V_C - V_D - 1.0) / I_C] - 300$$


Where: V_C = voltage to ground from pin 3

V_D = the forward conduction voltage drop of D1


I_C = the control pin current (5 - 10 mA)

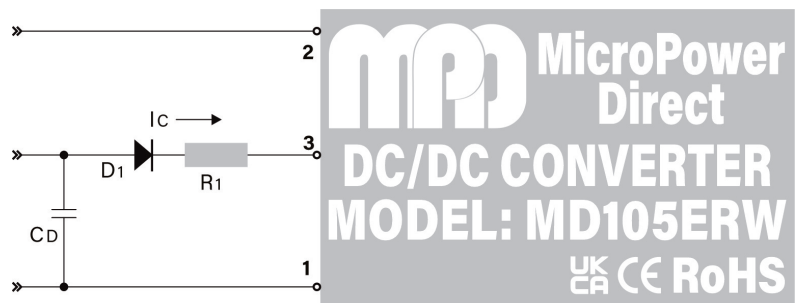

Mechanical Dimensions

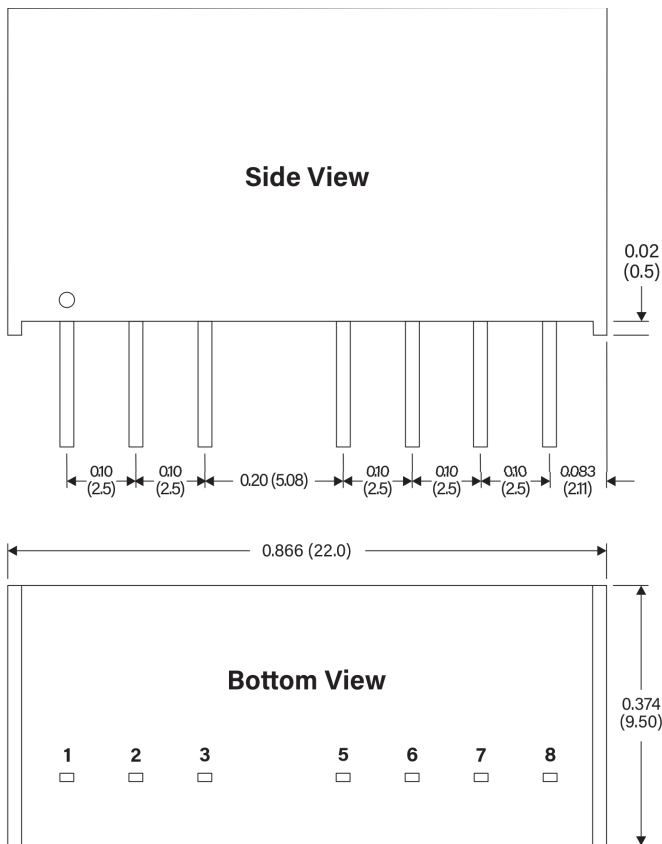

www.micropowerdirect.com

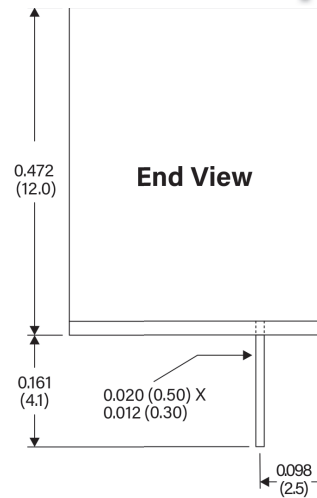

Pin Connections

Pin	Single Output
1	-VIN
2	+VIN
3	Remote On/Off
5	No Connection
6	+VOUT
7	-VOUT
8	CS


Pin	Dual Output
1	-VIN
2	+VIN
3	Remote On/Off
5	No Connection
6	+VOUT
7	Common
8	-VOUT

Notes:

- All dimensions are typical in inches (mm)
- Pin 1 is marked by a "dot" or indentation on the unit
- General Tolerance = ± 0.01 (± 0.25)
- Pin Tolerance = ± 0.004 (± 0.10)
- Recommended pin hole size (on the application PC Board) is $\varnothing 0.039$ ($\varnothing 1.00$)
- Weight (Typ) = 0.17 Oz (4.2g)

MPD offers a very wide variety of DC/DC converters. Our standard product line includes SMT, SIP, and DIP potted modules, industry standard 1x1" & 1x2" modules, as well as new models in an ultra miniature DFN package. Our units are used in applications ranging from high speed gate drive circuits to instrumentation to industrial equipment and medical equipment/instrumentation. Units are available over a power range of 0.25 to 60W. Most models meet international EMC/EMI standards and many are fully approved to EN 62368. Call today, or go to our website to find the right DC/DC power module for your application.

WWW.MICROPOWERDIRECT.COM

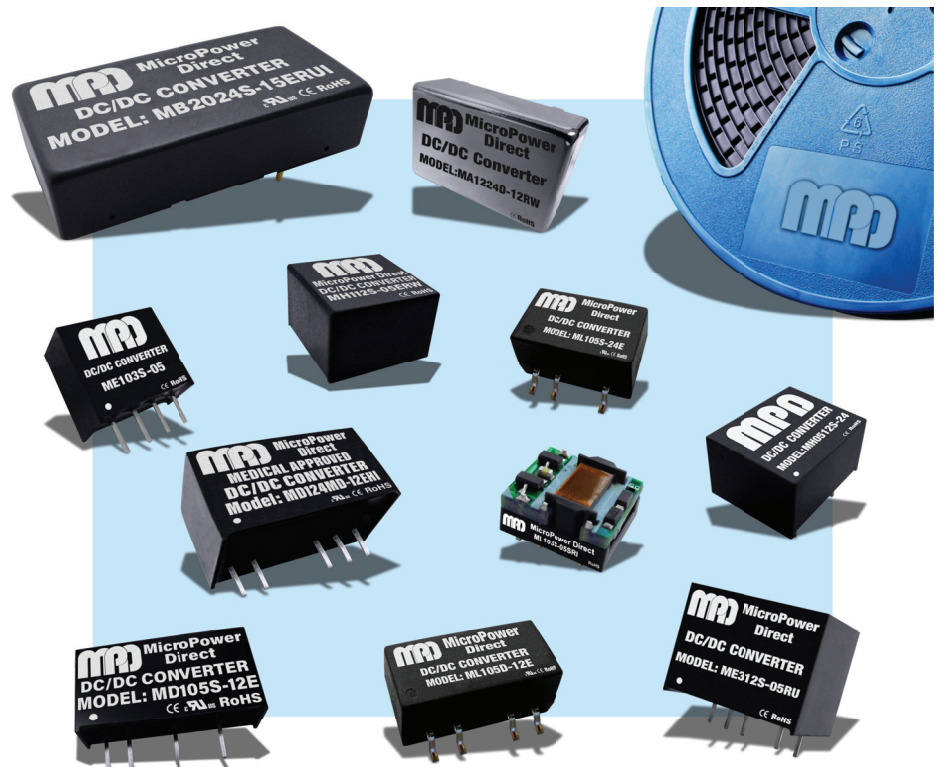

MicroPower Direct
We Power Your Success - For Less!

292 Page Street Ste D Stoughton, MA 02072 • TEL: (781) 344-8226 • FAX: (781) 344-8481 • E-Mail: sales@micropowerdirect.com