


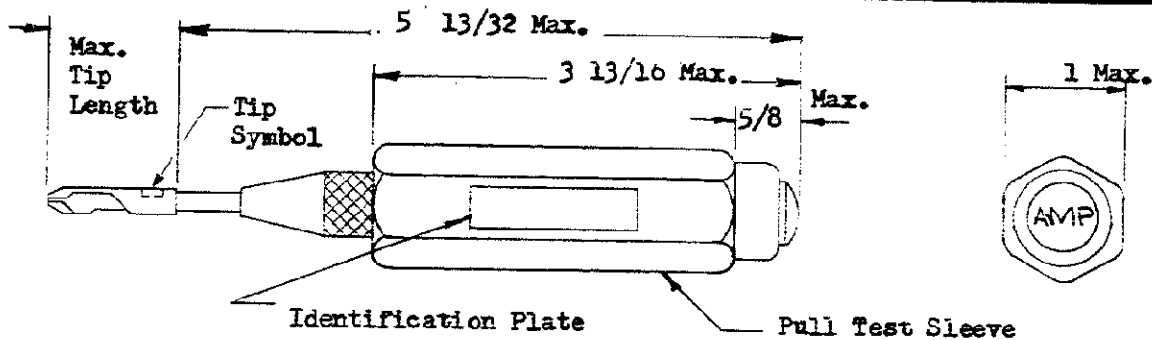

Tool Number	Trip Force	Tip Number	Tip Symbol	Tip Length
* 380310-1	20-22	395005	F	25/32
380310-2	12-13	395005	F	25/32
380310-3	12-13	395042	G	1 5/32
* 380310-4	20-22	395042	G	1 5/32
* 380310-7	20-22	380301-1	A1	1 23/32
380310-8	16-18	380301-1	A1	1 23/32
380310-9	12-13	126042-1	S1	1

* 20-22 pound tool to be used exclusively for inserting terminals into receptacles mounted in resilient material.

APPLICATION TOOLING ENGR'G.
CONNECTOR PRODUCTS DIV.

1. For Tool usage, see Instruction Sheet # 7076.
2. For Tip dimensions, see Tip Customer Drawing.
3. For readjustment or replacement of parts other than Tips, return Tool to AMP, Inc., Mt. Joy, Penna. to insure proper calibration.
4. Trip force is the force in pounds, required to trip tool.
5. A force of 10-12 pounds is required to make the Pull Test Sleeve move .100 inches.

©1956 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY
REFERENCE ONLY

MATERIAL AND FINISH

Steel-Plated;

Aluminum

Weight $6 \pm 1 \frac{1}{2}$ Oz.



AMP INCORPORATED
HARRISBURG, PENNA.

CLASS 11

TYPE 11

WIRE — RANGE — INSULATION

11 11

TOLERANCE EXCEPT AS NOTED

$\pm .015$ $\pm 1^{\circ} 0'$

SCALE

11

LOC

M

NO

A

C-380310

REV

J-3

NAME TOOL-STANDARD CERTI-LOK

INSERTION WITH PULL TEST FEATURE

PRINT DIST. DIMENSIONS IN INCHES. DO NOT SCALE PRINT.