

Mini-Circuits

SURFACE MOUNT 

RF Transformer

TCM2-43X+

50Ω

10 to 4000 MHz

FEATURES

- Wide Bandwidth 10 to 4000 MHz
- Balanced Transmission Line
- Excellent Return Loss
- Aqueous Washable

APPLICATIONS

- PCS
- Wideband Push-Pull Amplifiers
- Cellular



Generic photo used for illustration purposes only

CASE STYLE: DB1627


+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Impedance Ratio (Secondary/Primary)		2			
Frequency Range		10		4000	MHz
Insertion Loss	10-4000		1.3	3.0	dB
Amplitude Unbalance	10-4000		0.5		dB
Phase Unbalance	10-4000		7		Degree

ELECTRICAL SCHEMATIC

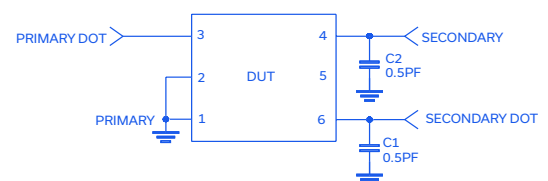


ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
RF Power	0.4 W
DC Current	30 mA

Permanent damage may occur if any of these limits are exceeded.

CONFIGURATION K

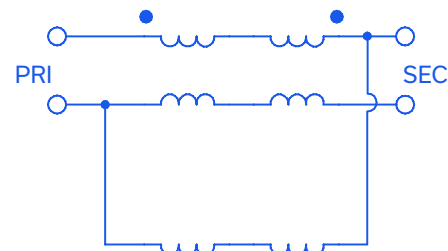


Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
ECO-013812
TCM2-43X+
MCL NY
251120

PAGE 1 OF 3



SURFACE MOUNT RF Transformer

TCM2-43X+

50Ω


10 to 4000 MHz

PIN CONNECTIONS

PRIMARY DOT	3
PRIMARY	1,2
SECONDARY DOT	6
SECONDARY	4
GND	1,2
NOT USED	5

PRODUCT MARKING: GJ

DEMO BOARD MCL P/N: TB-TCM2-43X+ SUGGESTED PCB LAYOUT (PL-380)

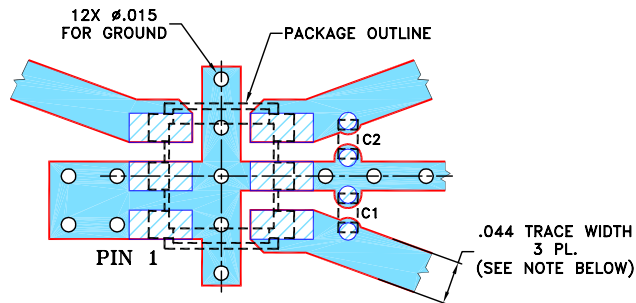


COMPONENT	SIZE
C1, C2	0402


- NOTES:** 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-676+.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

OUTLINE DRAWING

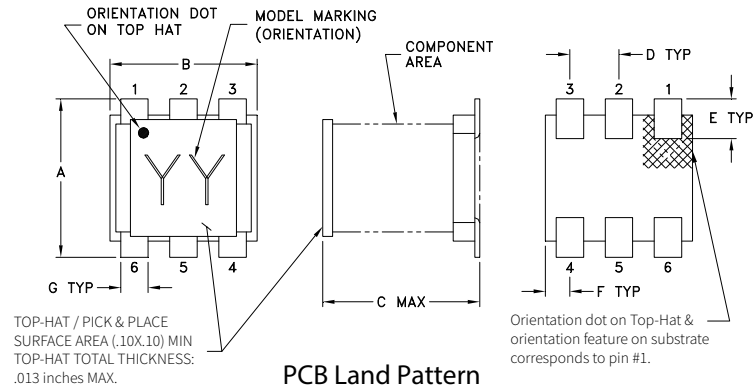

PCB Land Pattern



SUGGESTED LAYOUT
TOLERANCE TO BE WITHIN ±.002

OUTLINE DIMENSIONS (Inches)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

TAPE & REEL INFORMATION: F47



Mini-Circuits

top hat[®]
SURFACE MOUNT
RF Transformer




TCM2-43X+

50Ω

10 to 4000 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)
10	1.88	15.46	0.08	0.74
100	1.76	15.22	0.03	1.07
500	1.61	14.98	0.24	4.40
1000	1.35	15.87	0.32	5.96
1500	1.17	17.86	0.09	6.73
2000	1.09	21.30	0.23	7.01
2500	1.11	24.93	0.52	7.71
3000	1.17	25.06	0.82	6.95
3500	1.26	23.10	0.79	5.04
4000	1.55	16.24	0.81	3.16

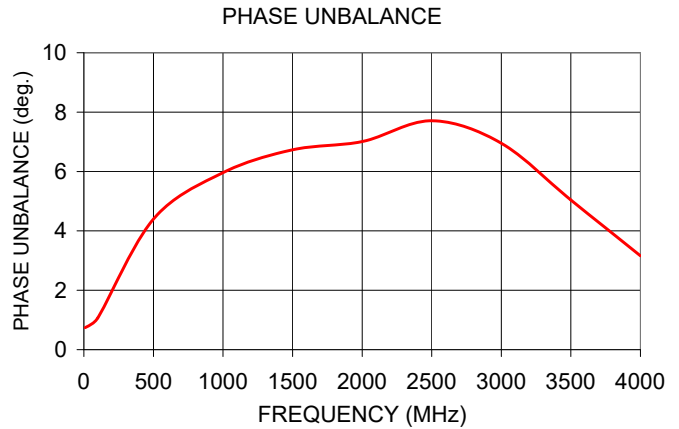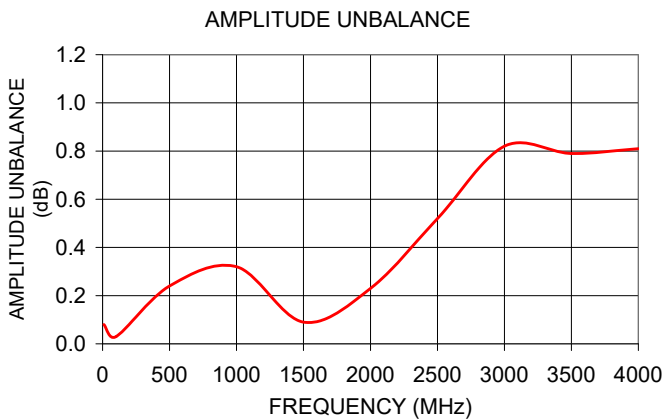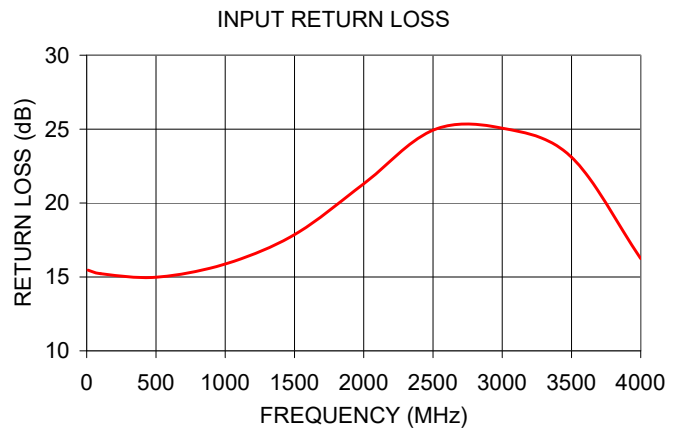

- NOTES
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

