

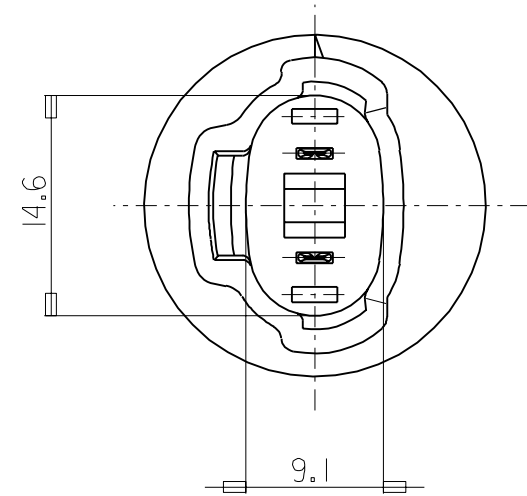
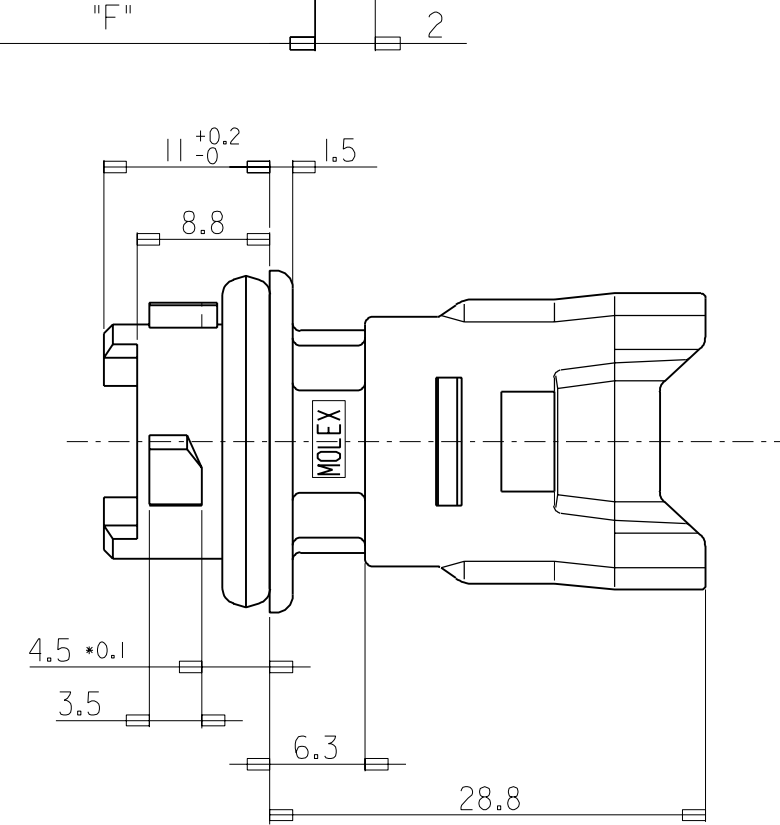
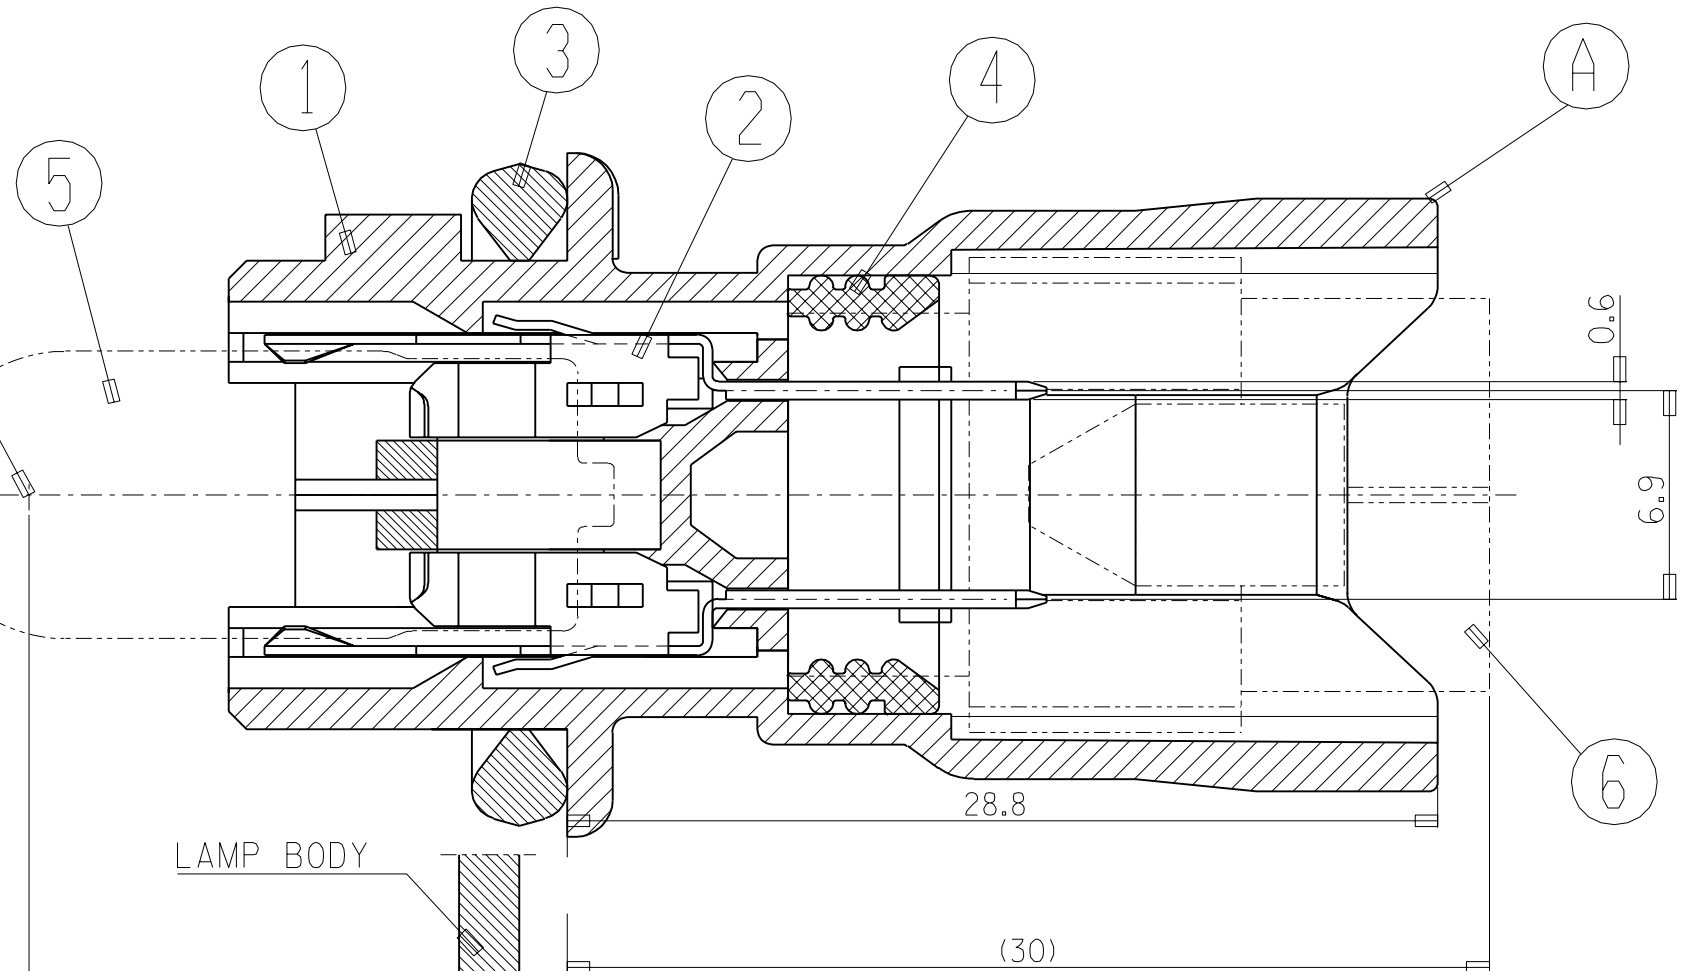
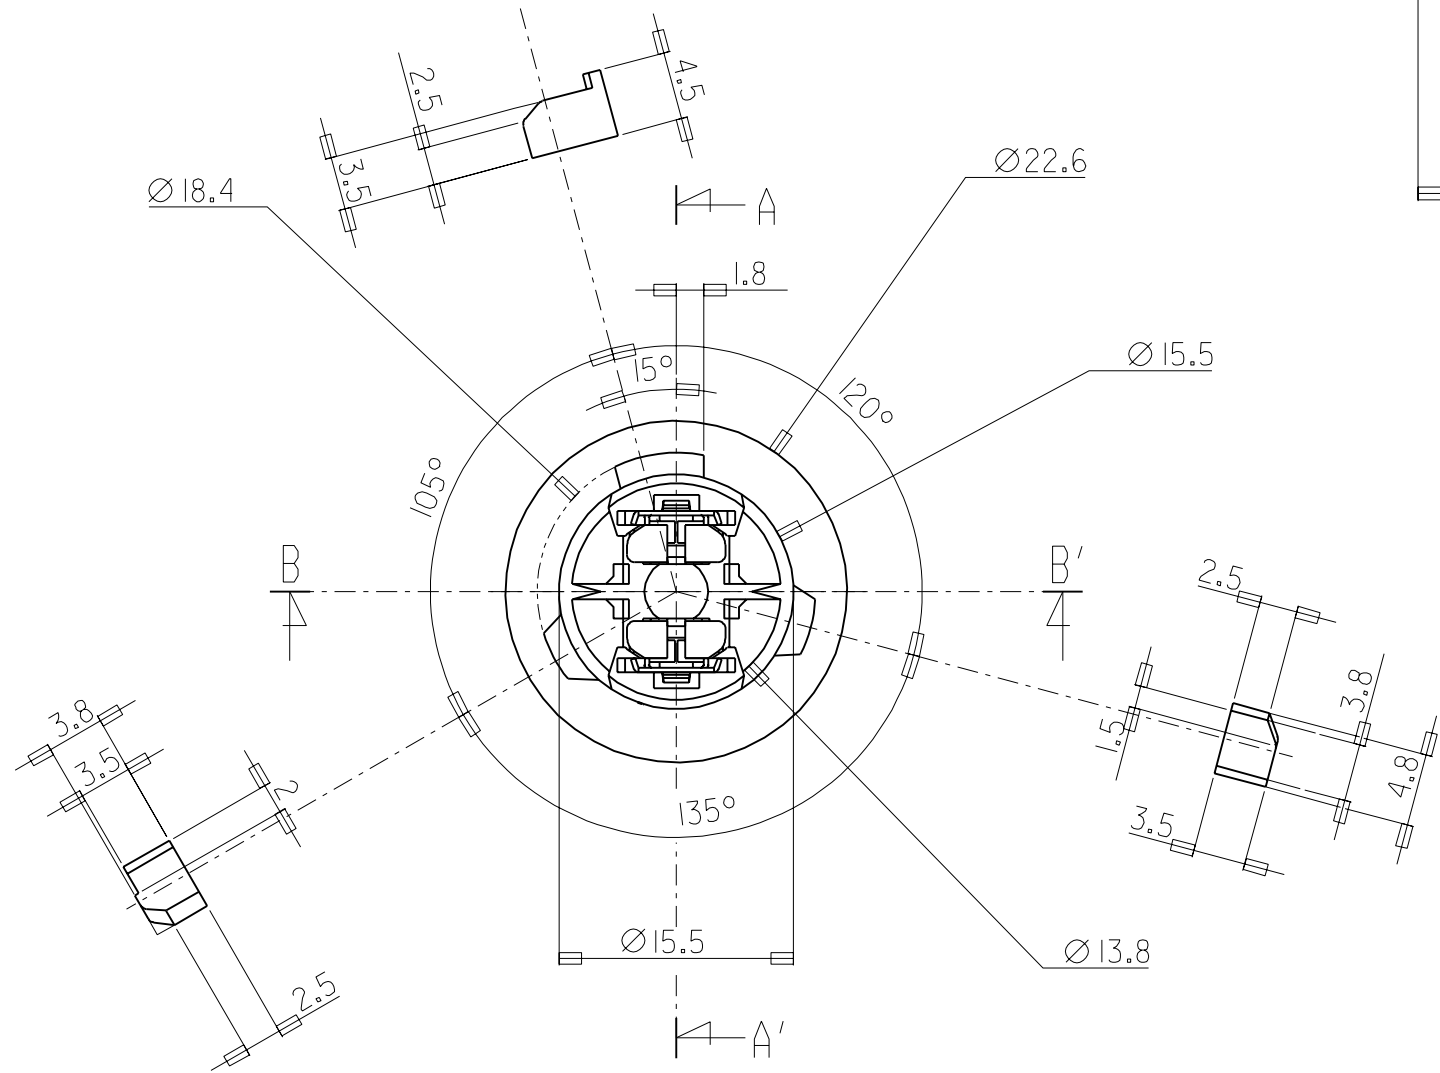
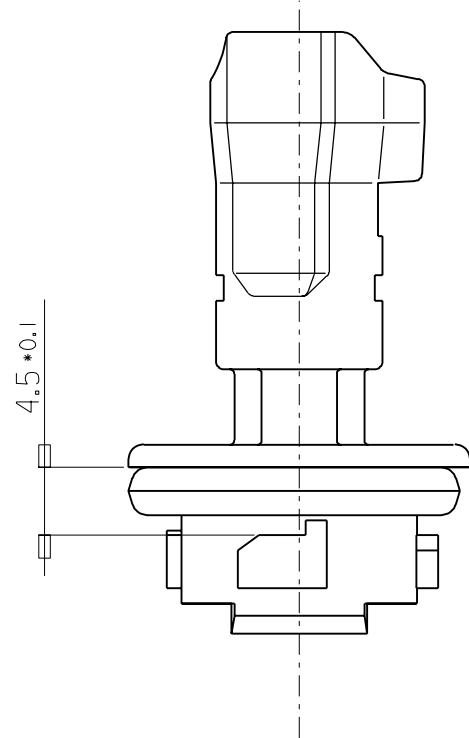
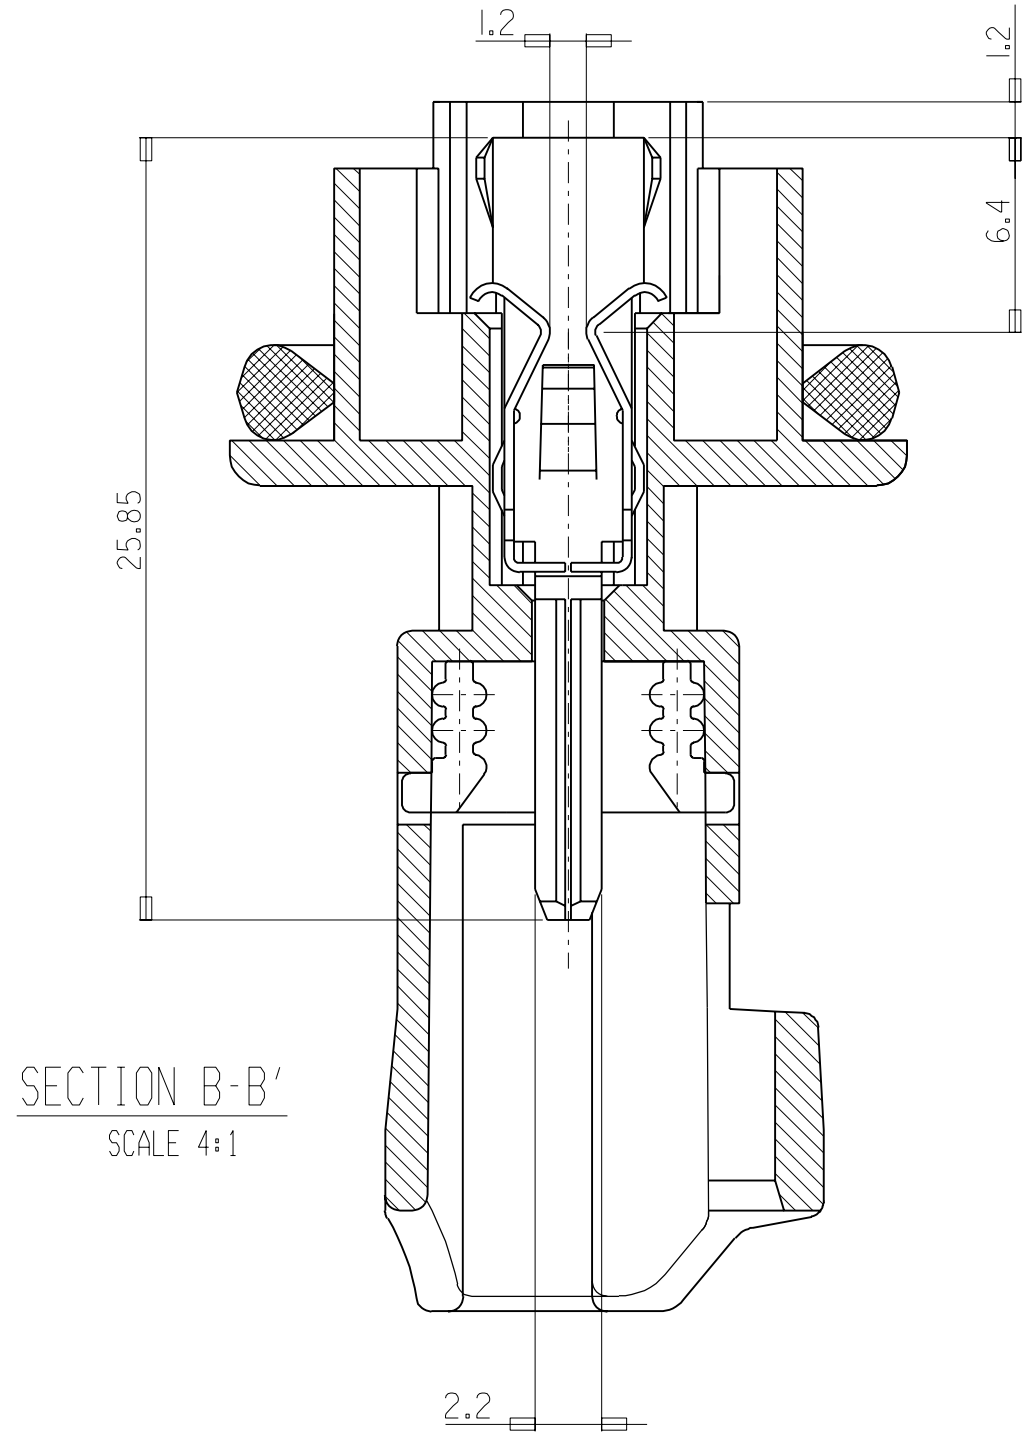


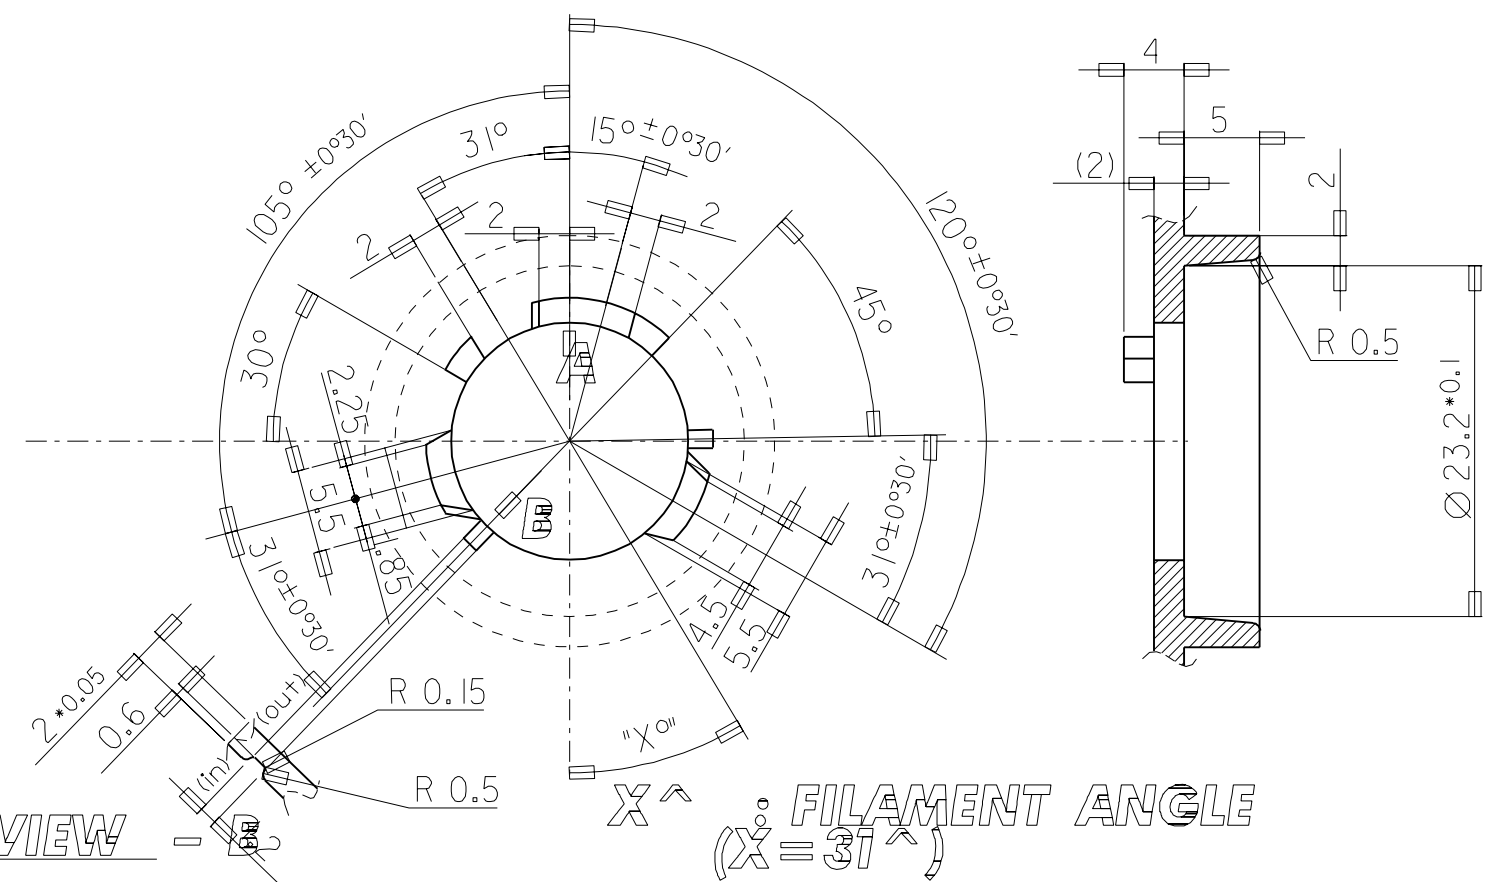

SOCKET PLUG HOLE

(SES-D-102 301-04)

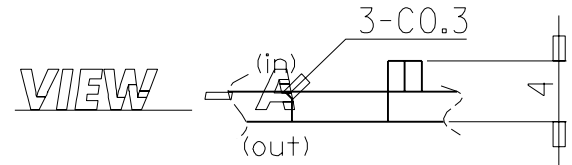

NOTES

- MATERIAL : SOCKET PLUG POLYAMIDE, UL94V-0
TERMINAL : COPPER-ALLOY, 0.3t
OTHERS : SEE TABLE
- FINISH : SEE TABLE
- PRODUCT SPECIFICATION : PS 35340-001
- "F" DIMENSION
(1) ECE SPECIFICATION : 11.7mm
(2) KS : 13.3mm
- MATES WITH 35512
- GENERAL TOLERANCE

DIMENSION	TOLERANCE
LESS 4	±0.2
4 TO 8	±0.25
8 TO 16	±0.3
16 TO 32	±0.4
32 TO 63	±0.5
63 TO 126	±0.6
DRAFT ANGLE	LESS 1° 30'

REVISED
EC NO. KOR2001-0033
DRWN: Y.Sook(1m010412)
CHK: J.K.OH
APPR: C.W.LEE

QUALITY SYMBOLS
MAJOR
CRITICAL

GENERAL TOLERANCES:
(UNLESS SPECIFIED)
mm INCH
4 PLACES ±0. ±.
3 PLACES ±0. ±.
2 PLACES ±0. ±.
1 PLACE ±0. ±.
ANGULAR: ± 1 °
DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONS

SCALE 2:1
DESIGN UNITS
mm INCH
DRAWN BY & DATE
Y.Soo.Kim 960105
CHECKED BY & DATE
J.K.OH
APPROVED BY & DATE
C.W.LEE
CAD FILENAME
SD35341.DGN

TITLE:
STS BULB SOCKET ASSY
MOLEX INCORPORATED
KOREA
MATERIAL NO.
DRAWING NO.
SD-35341-001
SHEET NO.
1 of 1
SIZE
C

GRAY	I	POLYAMIDE	SOCKET PLUG	355120200	35512-0200	6
12V 5W	I	-	BULB	-	-	5
RED	I	SILICON	INNER SEAL	359030011	35903-0011	4
DARK GRAY	I	RUBBER	O-RING	359030013	35903-0013	3
-	2	CU-ALLOY	TERMINAL	350756100	35075-6100	2
GRAY	I	POLYAMIDE	STS HEADER	353410290	35341-0290	1
-	-	-	SOCKET ASSY	353410210	35341-0210	A
FINISH	Q'TY	MATERIAL	DECRPTION	MATERIAL NO	ENG NO	NO