

DETAILS

Product Number	CN12644_LENINA-S
Family	Lenina
Type	RefPack
Color	metal
Diameter	74 mm
Height	45,6 mm
Style	round
Optic Material	
Holder Material	
Fastening	screw
Status	production ready
ROHS Compliant	Yes
Date Updated	31/10/2016

OPTICAL PROPERTIES

LED	Viewing	Light	Efficiency	cd/lm	Connector
	Angle	Beam			
LUXEON CoB 1204/1205	18 deg	Spot	88 %	4.500	-
LUXEON CoB 1208	20 deg	Spot	89 %	3.900	-
COB J-Type	20 deg	Spot	88 %	3.790	-
Mega Zenigata (GW5DGC)	17 deg	Spot	88 %	-	-
Mega Zenigata (GW6DME)	19 deg	Spot	88 %	3.940	-



D C B A

4




4

3

3

2

2

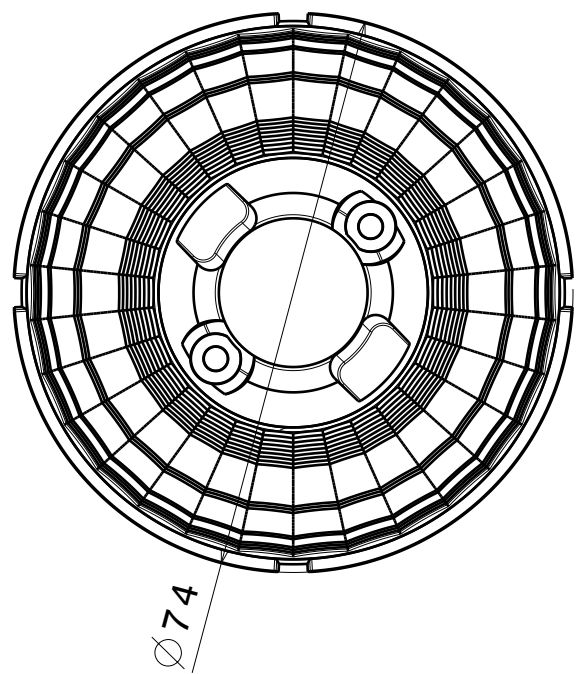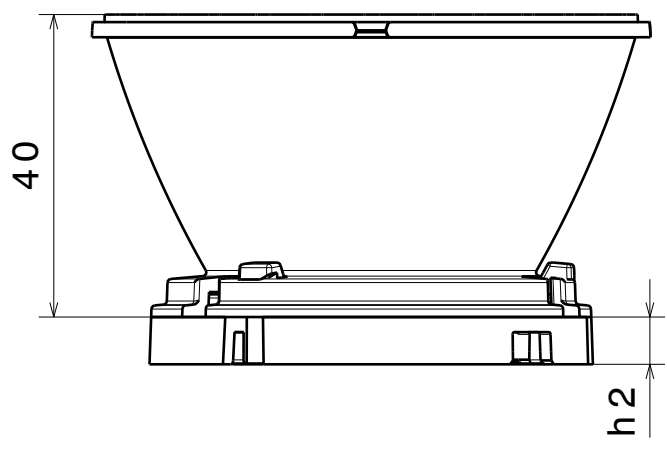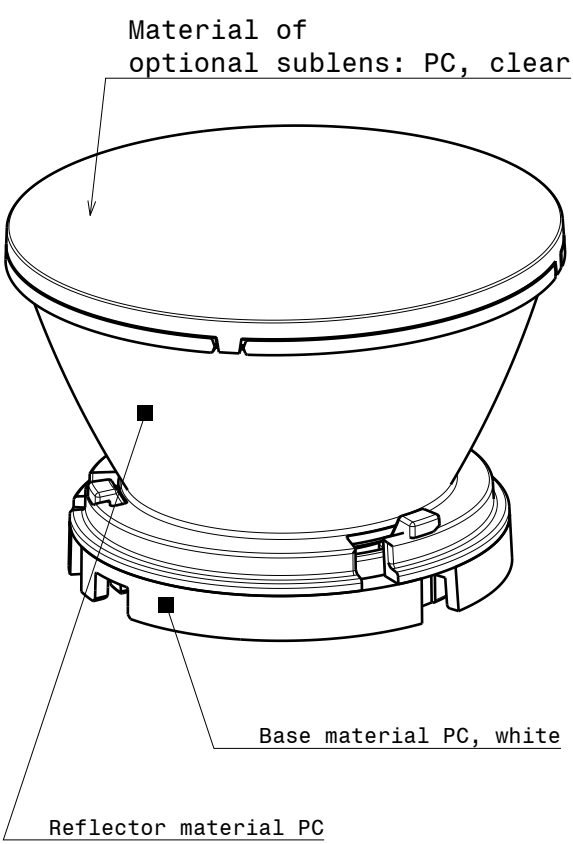

NOTE:

Using optional sublens, add 2.1mm to the system height

Dimension 'h2' varies from 4.5mm to 7mm depending on the LED specific base part

This drawing is our property. It can't be reproduced or communicated without our written agreement.



Ledil Oy
Salorankatu 10
FIN-24240 SALO
Finland

DRAWING TITLE

Datasheet Lenina series


DRAWN BY ks	DATE 23.04.2014	Datasheet Lenina series					
CHECKED BY	DATE	SIZE A4	DRAWING NUMBER --				REV 1
DESIGNED BY pl	DATE 08.03.2012	SCALE 1:1	WEIGHT (g)			SHEET 1 / 1	

1


1

D A


Luminaire: LEDiL Oy CN12644_LENINA-S_(LUXEON_CoB_1205) Eff: 88 %
Lamps: 1 x LUXEON CoB 1205 (LHC1-3080-1205) 1106lm@250mA CCT=3000K P=8.3W I=250mA

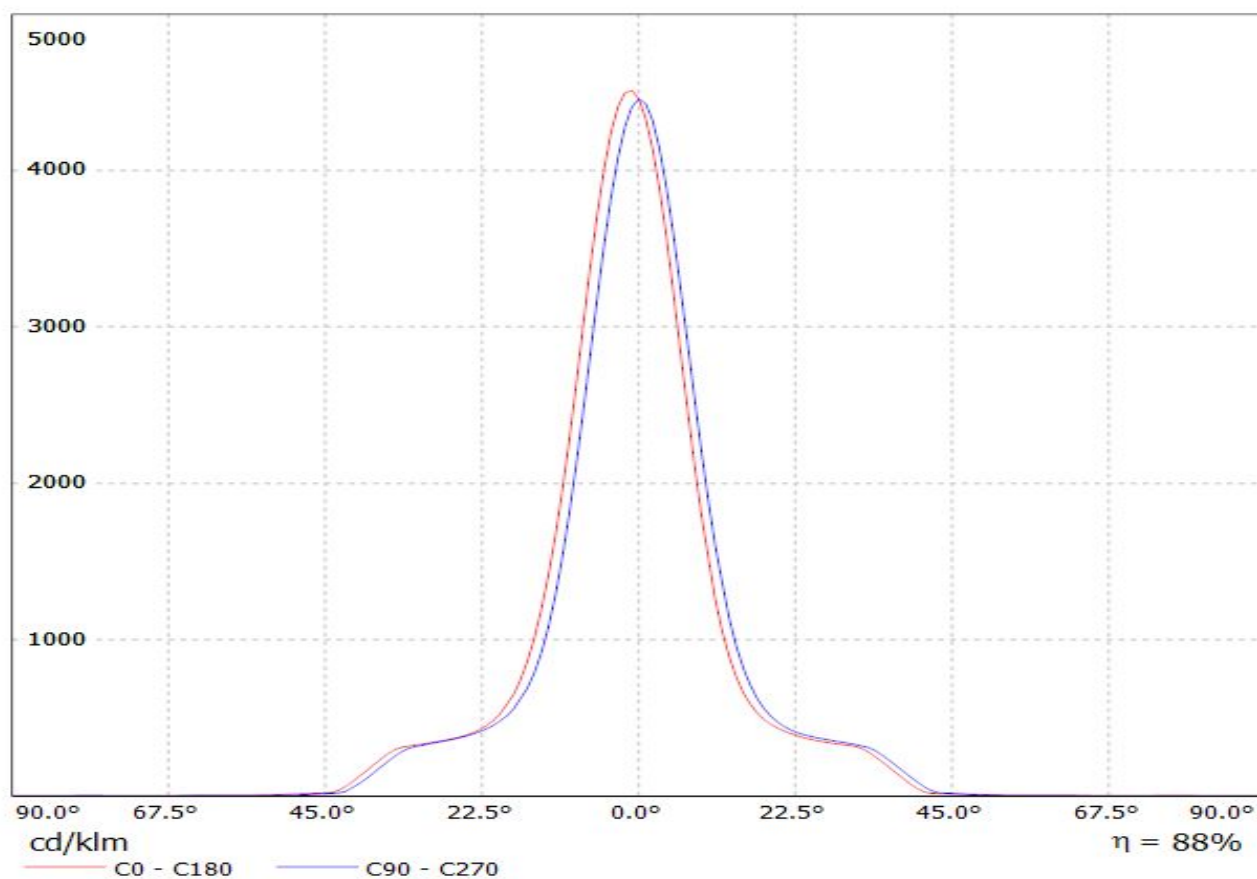

Luminaire: LEDiL Oy CN12644_LENINA-S_(Luxeon_CoB_1208) Eff: 89 %
Lamps: 1 x Luxeon CoB 1208 (LHC1-3080-1208) 1065lm@250mA CCT=3000K P=8.3W I=250mA

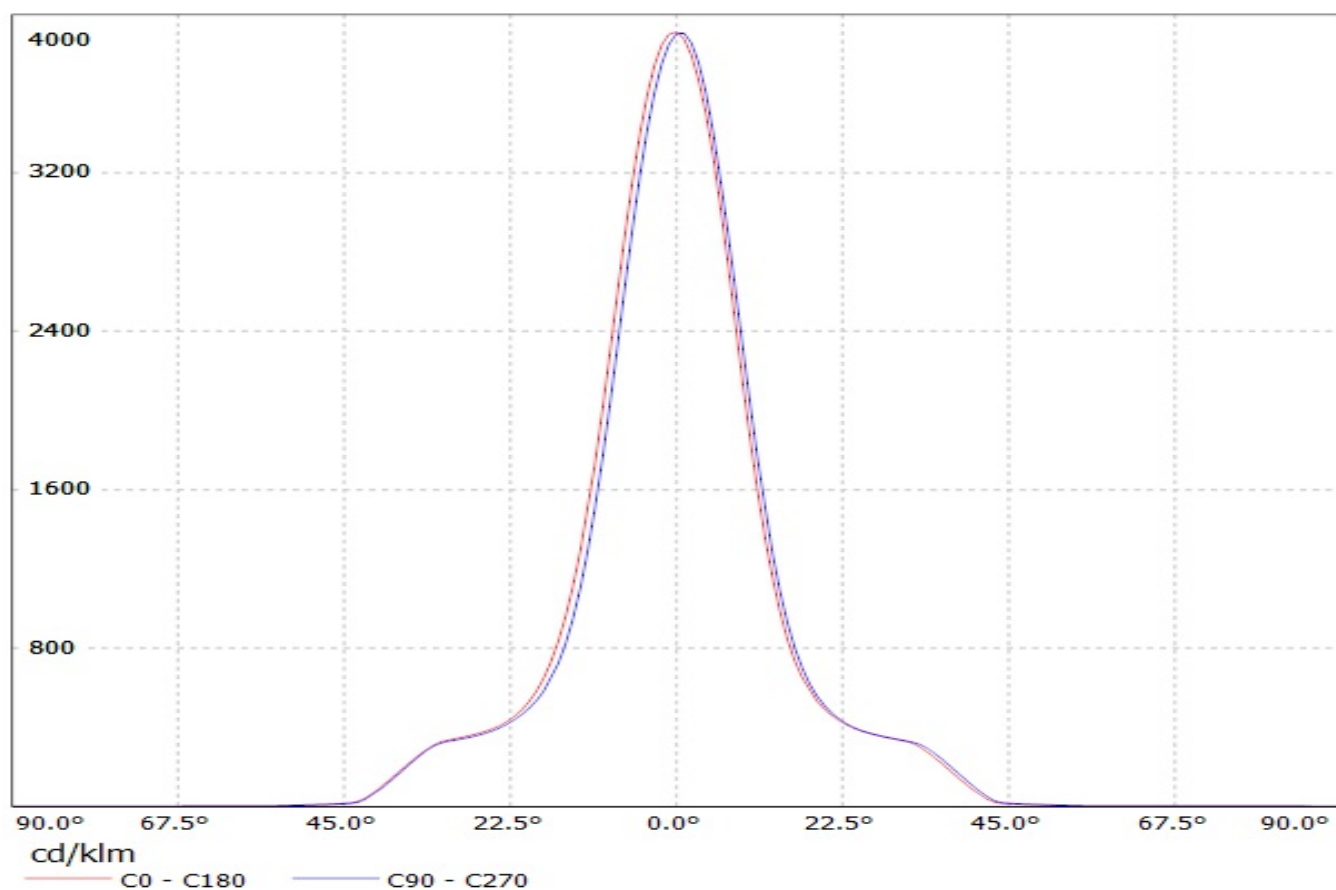


Luminaire: LEDiL Oy CN12644_LENINA-S_(NSCxJ216A) Eff.88.2%
Lamps: 1 x NICHIA_NSCxJ216A_(NSCLJ216AE)_1073.33lm@250mA CCT=3000K P=8.11575W I=249.9mA

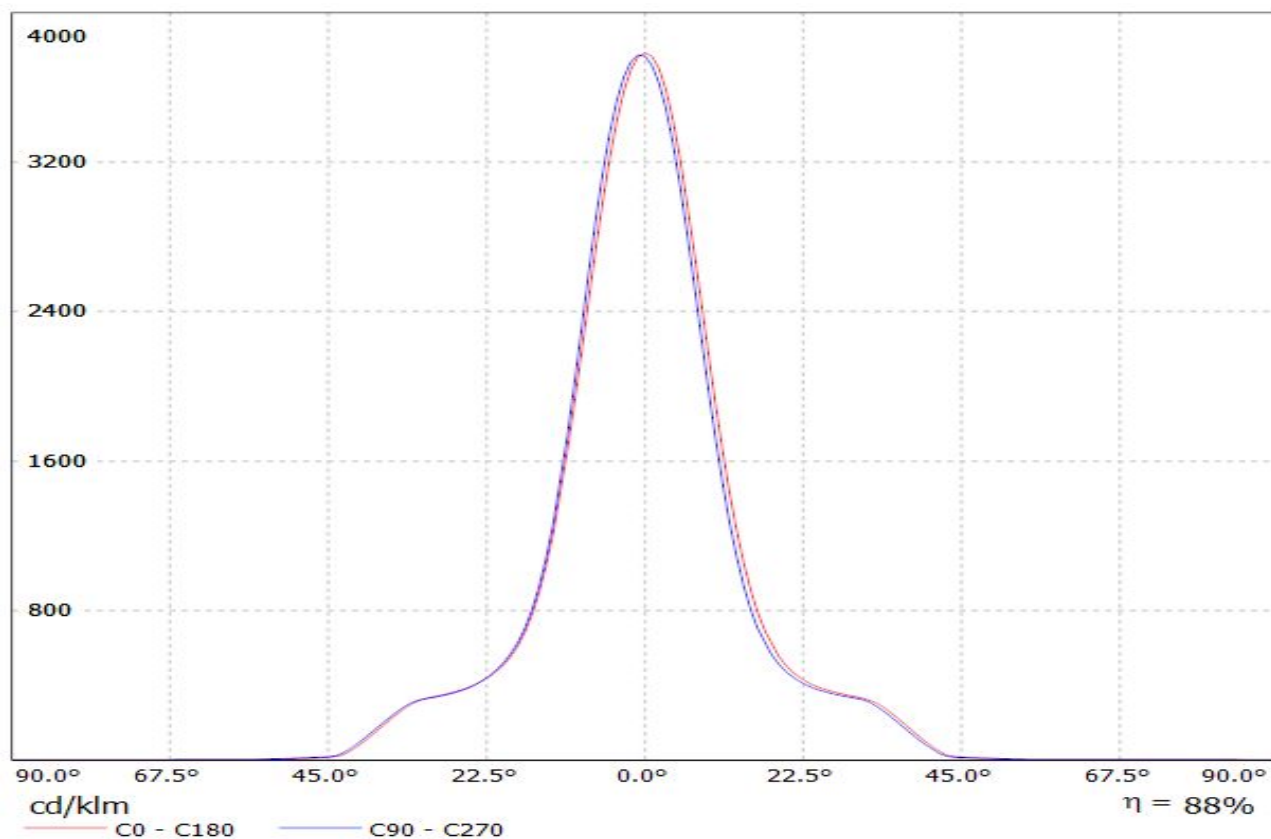


Luminaire: LEDiL Oy CN12644_LENINA-S_(Megazenigata_GW6D) Eff.87.8%

Lamps: 1 x SHARP_Megazenigata_(GW6DMC40NFC)_1087.39lm@250mA_P=8.48721W_I=249.8mA

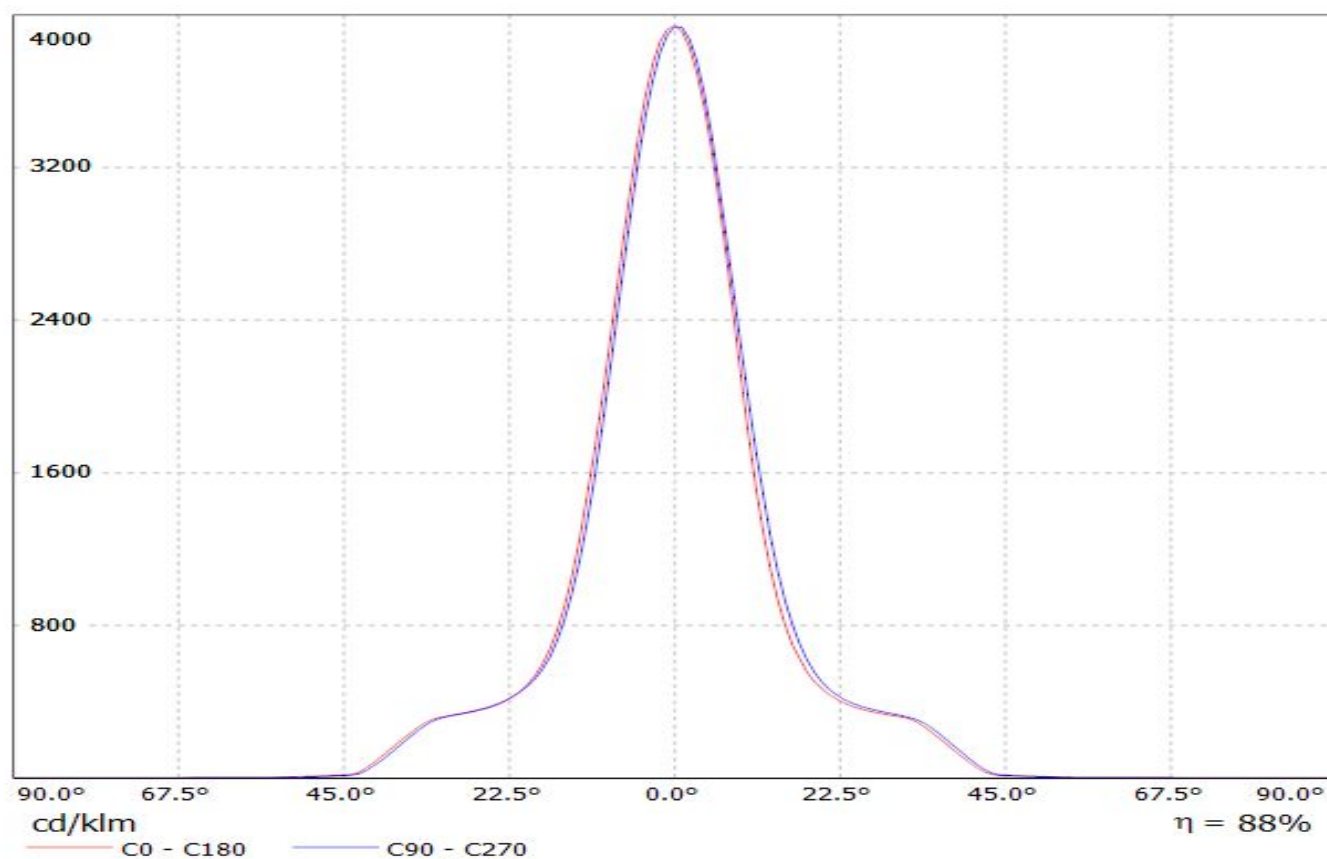


Luminaire: LEDiL Oy CN12644_LENINA-S_(LUXEON_CoB_1205) Eff: 88 %

Lamps: 1 x LUXEON CoB 1205 (LHC1-3080-1205) 1106lm@250mA CCT=3000K P=8.3W I=250mA

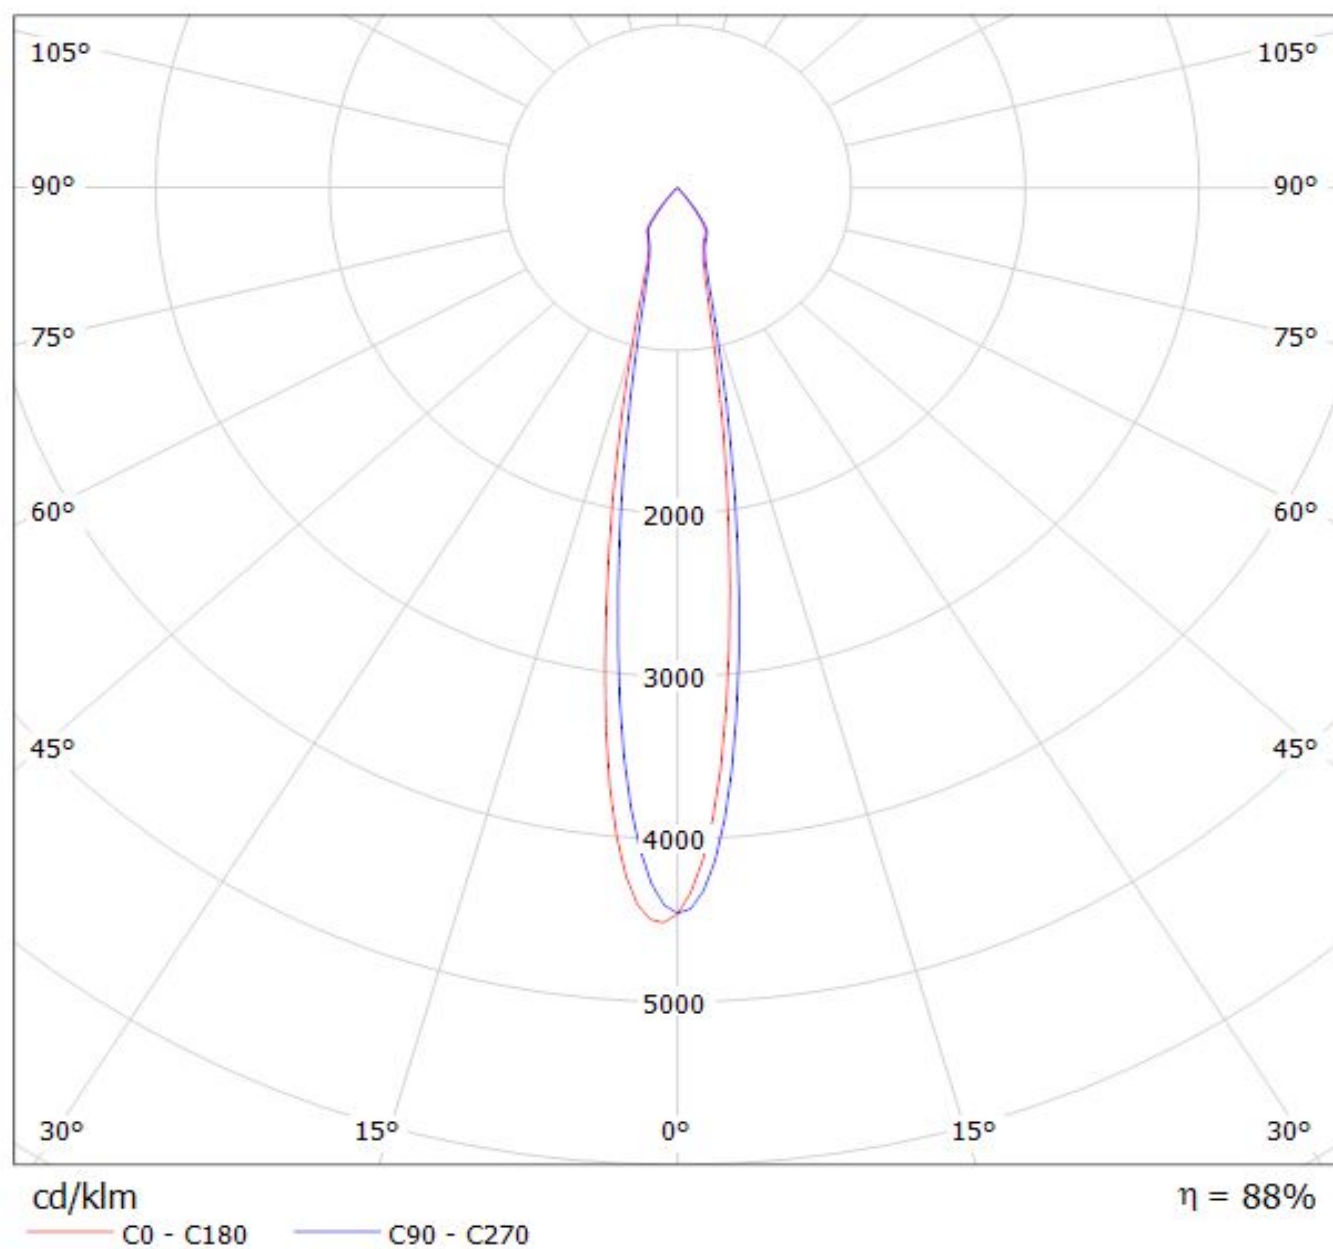

Luminaire: LEDiL Oy CN12644_LENINA-S_(Luxeon_CoB_1208) Eff: 89 %

Lamps: 1 x Luxeon CoB 1208 (LHC1-3080-1208) 1065lm@250mA CCT=3000K P=8.3W I=250mA

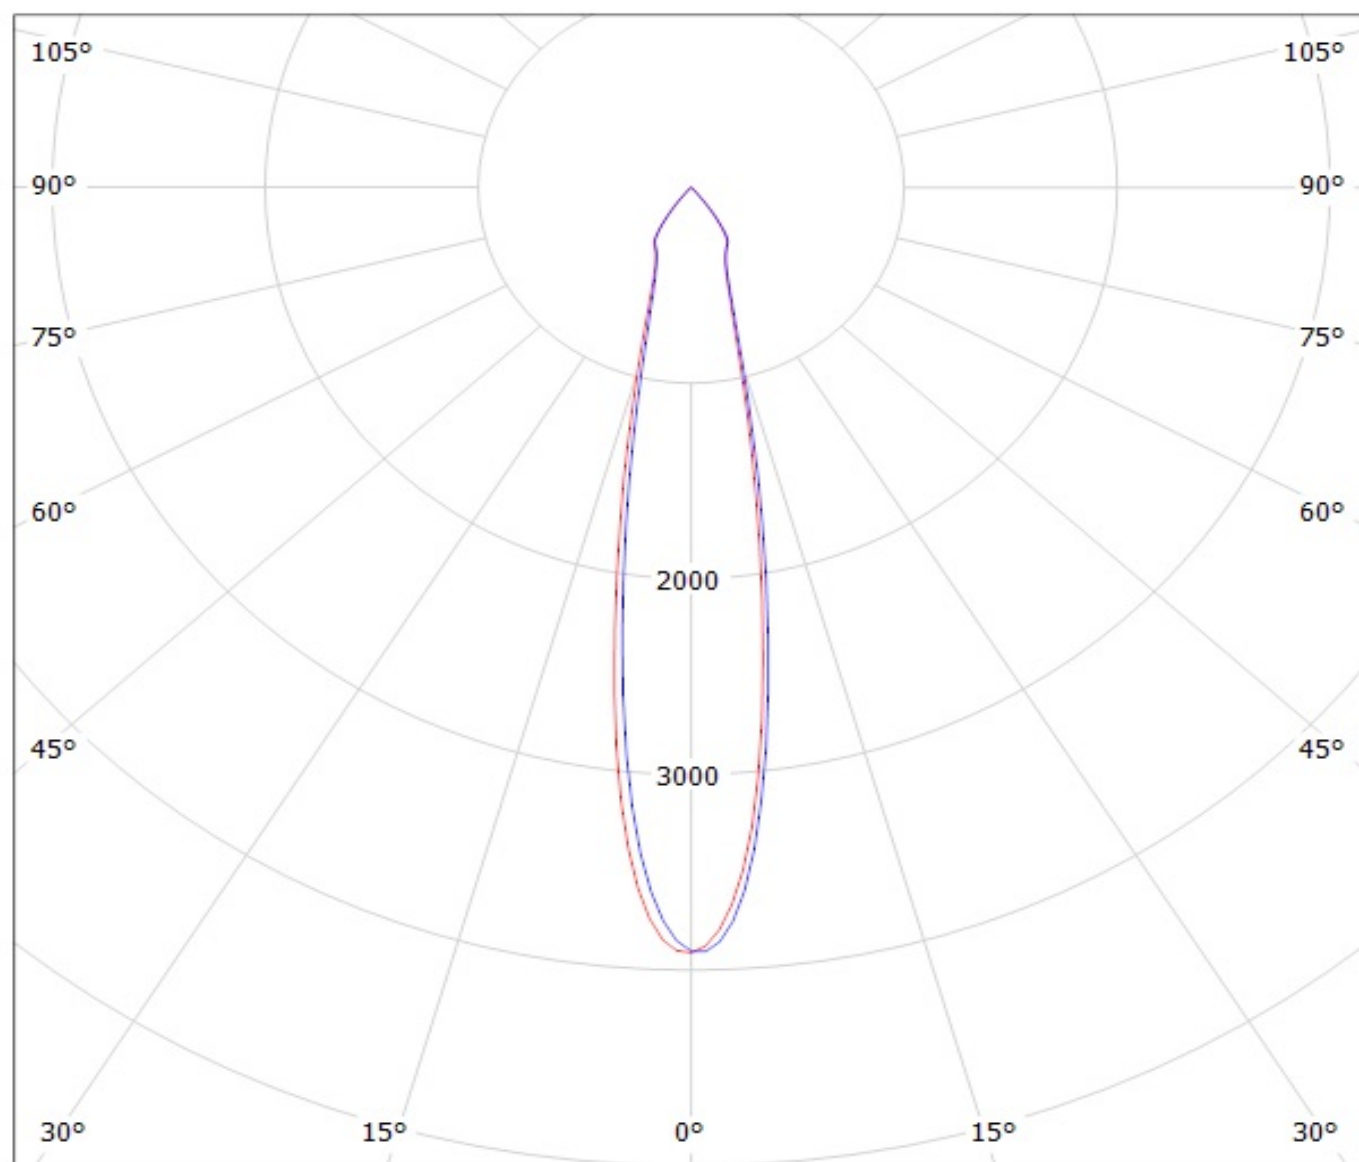


cd/klm


— C0 - C180

— C90 - C270

Luminaire: LEDiL Oy CN12644_LENINA-S_(NSCxJ216A) Eff.88.2%
Lamps: 1 x NICHIA_NSCxJ216A_(NSCLJ216AE)_1073.33lm@250mA CCT=3000K P=8.11575W I=249.9mA

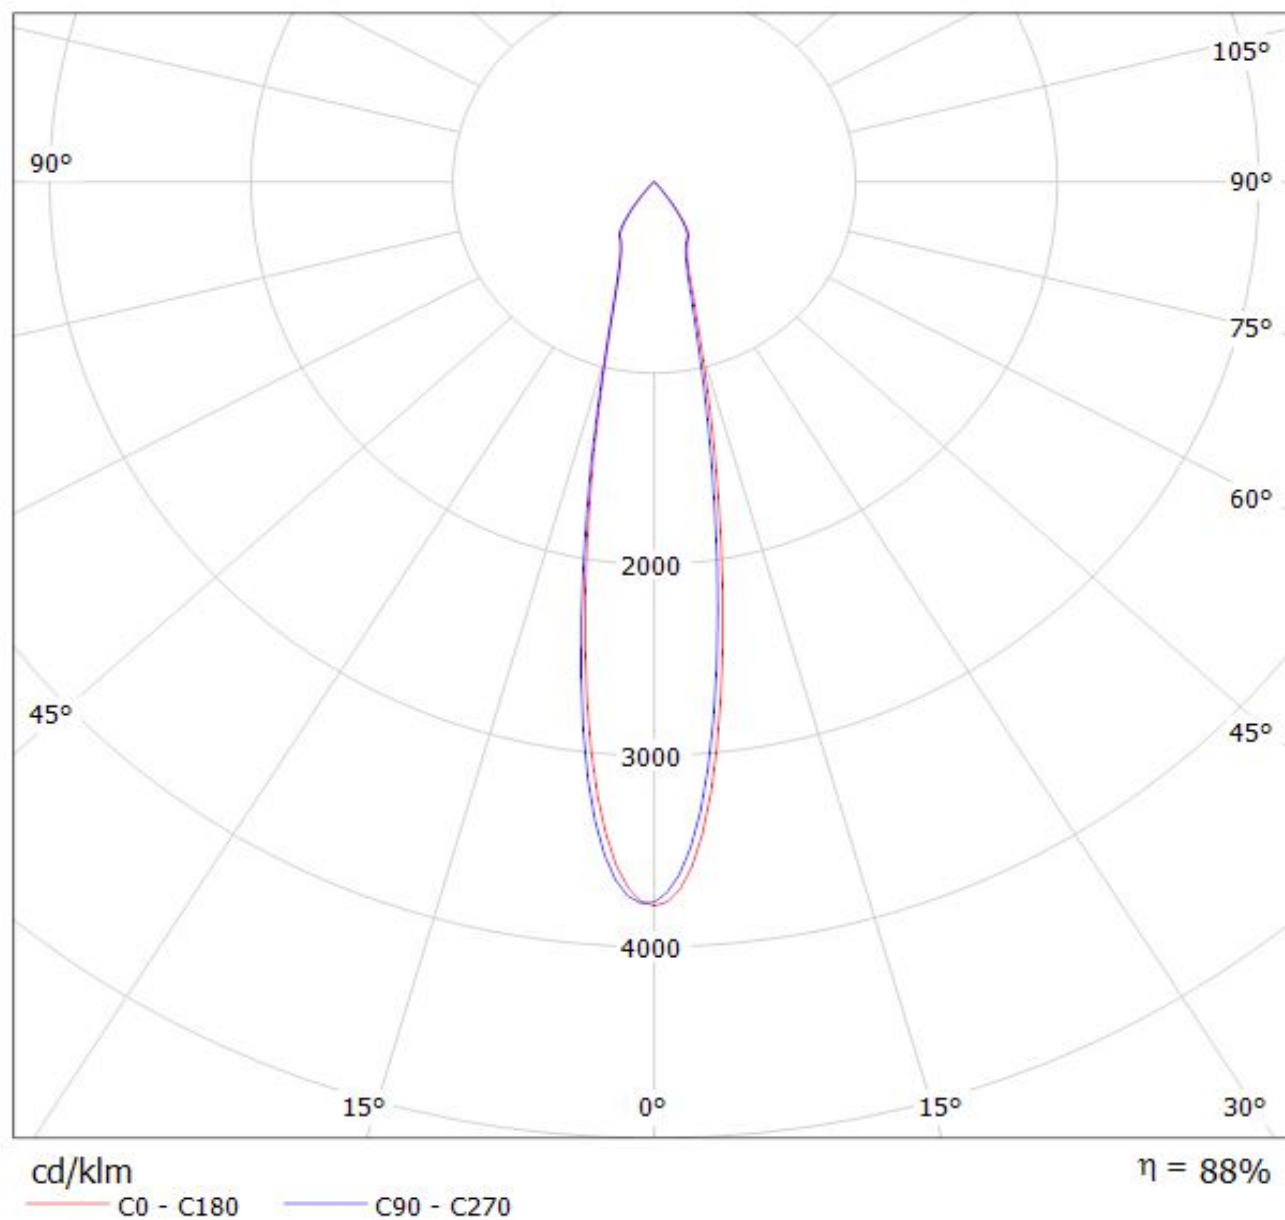

Luminaire: LEDiL Oy CN12644_LENINA-S_(Megazenigata_GW6D) Eff.87.8%
Lamps: 1 x SHARP_Megazenigata_(GW6DMC40NFC)_1087.39lm@250mA_P=8.48721W_I=249.8mA

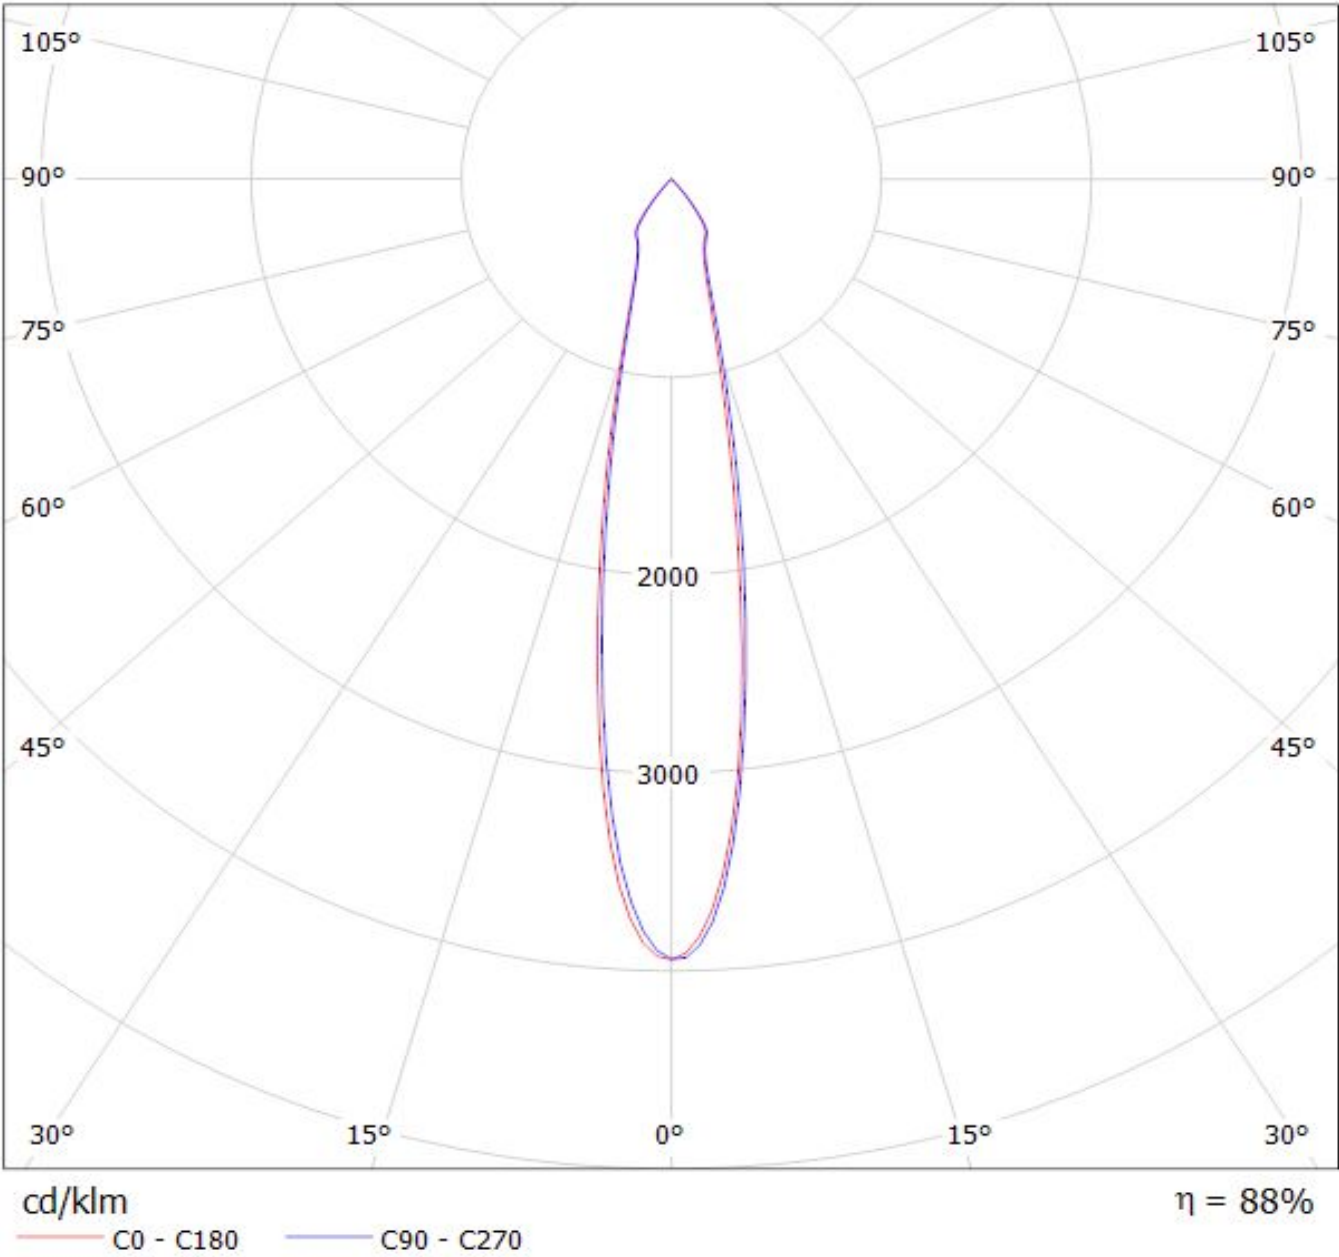

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.