


ECA10

10W ULTRAMINIATURE ENCAPSULATED SWITCHING POWER SUPPLIES

The ECA-10 series features efficient, compact switching power supplies with a 10-watt output and a universal input range of 90 to 264 volts AC, suitable for global use. Notable for its strong electromagnetic interference (EMI) performance, it minimizes disruption to nearby electronics. It also offers 4242 volts DC electrical isolation, enhancing safety. The series includes single, dual, and triple output models, allowing for flexible power distribution in various applications.



HOW TO ORDER

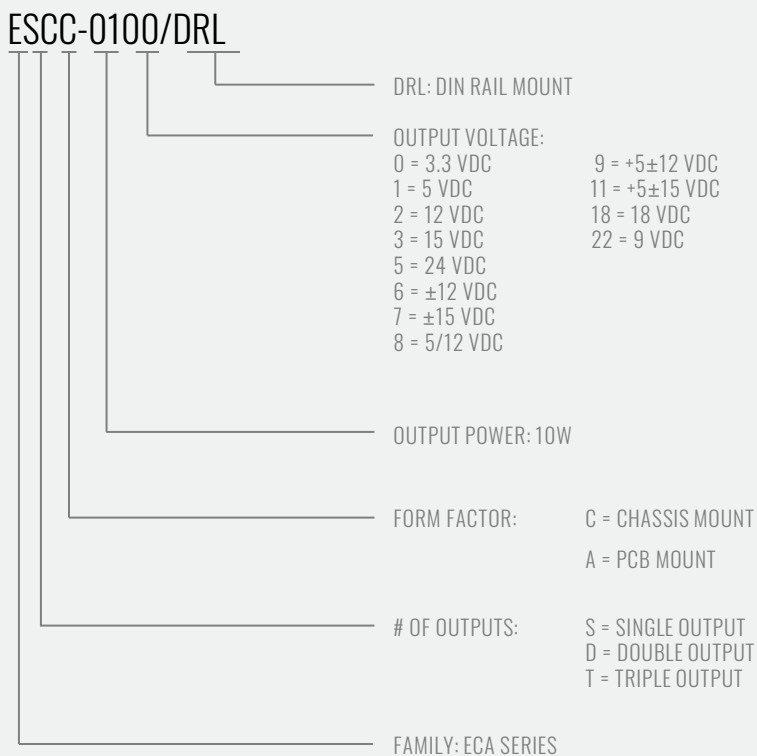

FEATURES

INPUT VOLTAGE

90-264VAC (100-240VAC Nominal)

FREQUENCY RANGE

47-63 Hz

OPERATING TEMPERATURE

0 to +40°C (See Derate*)

SAFETY APPROVALS

UL/cUL: UL60950-1 2nd ed./
C22.2 60950-1 2nd ed.
CB: IEC60950-1 2nd ed.
EMC: EN55011 Class B


Improved EMI Performance

ISOLATION

Input-Output: 4242VDC
I/P-Ground: 3535VDC
O/P-Ground: 1414VDC

EFFICIENCY

See model selection chart

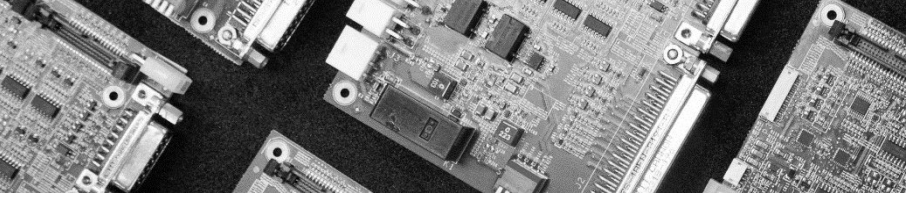


ECA10

10W ULTRAMINIATURE ENCAPSULATED SWITCHING POWER SUPPLIES

PARAMETERS

ECA10

Input Voltage	90-264 VAC (100-240 VAC, nom.)
Input Frequency	47-63 Hz
Inrush Current	20A@115V, 40A@230V Input*
Leakage Current	<3.5mA@264 VAC, 50 Hz
Voltage Current	See Selection Chart
Load Regulation (Note 7)	Single/Duals: $\pm 3\%$ Triple: 0.5 / $\pm 5\%$ (max)
Line Regulation (Note 8)	Single: 0.1 ~ 1%, typ Duals: $\pm 0.3 \sim 1\%$, typ Triple: 0.6 / $\pm 0.2\%$ (max)
Cross Regulation (Note 11)	Duals: 2% Triple: NA / $\pm 0.1\%$
Preset Accuracy (Note 9)	Single: $\pm 1\%$ Duals: $\pm 1.5\%$ Triples: 1% / $\pm 5\%$
Temperature Coefficient	$\pm 0.03\%$ / $^{\circ}\text{C}$
Ripple/Noise (Note 1, 2, 10)	See Selection Chart
Over Voltage Protection	Clamp*
Short Circuit Protection (Note 3)	Continuous, Self-Recovering*
Hold Up Time	30 mS, typ (Nom. Input, 100% load)
* These are stress ratings. Exposure of the devices to any of these conditions may adversely affect long-term reliability. Proper operation under conditions other than the standard operating conditions is neither warranted nor implied.	
Isolation (Note 4)*	4242 VDC Input-Output 3535 VDC I/P-Ground 1414 VDC O/P- Ground
Efficiency	See Selection Chart
Switching Frequency	100 KHz, (fixed, typical)
Safety UL/cUL:	UL60950-1 2 nd ed./ C22.2 60950-1 2 nd ed.
CB:	IEC60950-1 2 nd ed.
EMC:	EN55011 Class B
Size	PCB Mount: 2.56L" x 1.77W" x 0.85H" Chassis Mount: 3.77L" x 2.16W" x 1.0H" Din Rail: 3.77L" x 2.16W" x 1.35H"
Case Material	Rynite, 94 V-0 Rated
Construction	Encapsulated, Soft Pot
Weight	PCB / CHA: 4 oz (113g) / 8.5 oz (241g) Din Rail: 11.5 oz (326g)

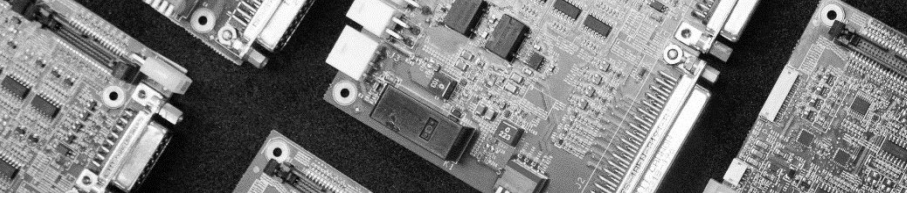

ECA10

10W ULTRAMINIATURE ENCAPSULATED SWITCHING POWER SUPPLIES

PARAMETERS


ECA10

Oper. Temperature	0 to + 40°C (See Derate)
Storage Temperature	-25 to 71°C *
Relative Humidity	0 to + 95%, non-cond*
MTBF	(Mil Std 217, 25°C) 270,000 Hrs

NOTES

1. All measurements should be made directly at the terminals of the power supply.
2. Ripple and Noise depend upon output voltage as specified par particular model.
3. Short Circuit Protection is self-recovering when overcurrent condition is removed.
4. Isolation for up to 1 minute duration.
5. Specified for free-air convection cooling.
6. Minimum load is NOT required for proper operation. However, auxiliary outputs should be reduced as a function of primary output minimum load or load regulation will be higher.
7. Load regulation measured from 20% to FL.
8. Line regulation measured from 90 VAC to 264 VAC.
9. Preset accuracy measured at nominal load, 120 VAC input.
10. O/P noise measured directly at pins/terminals at nom. load, 0.1uF bypass, pk-pk @20MHz bandwidth.
11. Cross Reg.: Measured output (5V for Triples) at nominal load with the other output(s) varied between 60% to 100% load.
12. 100% Production Tested.

All specifications are typical at nominal input, full load, and 25°C unless other wise noted.

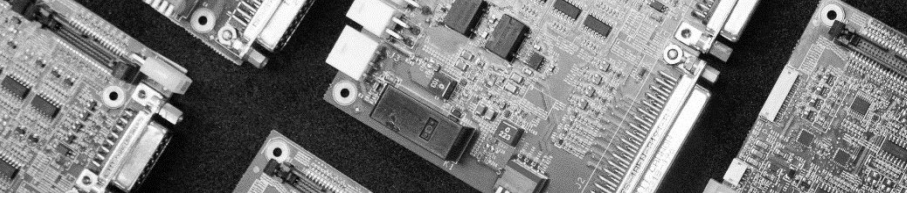


ECA10

10W ULTRAMINIATURE ENCAPSULATED SWITCHING POWER SUPPLIES

MODEL NUMBER OUTPUT VOLTAGE OUTPUT AMPS FL RIPPLE/NOISE EFFICIENCY TYP AT NOM. INPUT

SINGLE OUTPUT – PCB Mount				
ESCA-0100	3.3VDC	2.5A	100mV pk-pk	67%
ESCA-0101	5VDC	2A	100mV pk-pk	72%
ESCA-0122	9VDC	1.1A	100mV pk-pk	72%
ESCA-0102	12VDC	0.85A	100mV pk-pk	75%
ESCA-0103	15VDC	0.67A	100mV pk-pk	76%
ESCA-0118	18VDC	0.55A	120mV pk-pk	77%
ESCA-0105	24VDC	0.42A	160mV pk-pk	78%
SINGLE OUTPUT – Chassis Mount				
ESCC-0100	3.3VDC	2.5A	100mV pk-pk	67%
ESCC-0101	5VDC	2A	100mV pk-pk	72%
ESCC-0122	9VDC	1.1A	100mV pk-pk	72%
ESCC-0102	12VDC	0.85A	100mV pk-pk	75%
ESCC-0103	15VDC	0.67A	100mV pk-pk	76%
ESCC-0118	18VDC	0.55A	120mV pk-pk	77%
ESCC-0105	24VDC	0.42A	160mV pk-pk	78%
SINGLE OUTPUT – DIN Rail Mount				
ESCC-0100/DRL	3.3VDC	2.5A	100mV pk-pk	67%
ESCC-0101/DRL	5VDC	2A	100mV pk-pk	72%
ESCC-0122/DRL	9VDC	1.1A	100mV pk-pk	72%
ESCC-0102/DRL	12VDC	0.85A	100mV pk-pk	75%
ESCC-0103/DRL	15VDC	0.67A	100mV pk-pk	76%
ESCC-0118/DRL	18VDC	0.55A	120mV pk-pk	77%
ESCC-0105/DRL	24VDC	0.42A	160mV pk-pk	78%

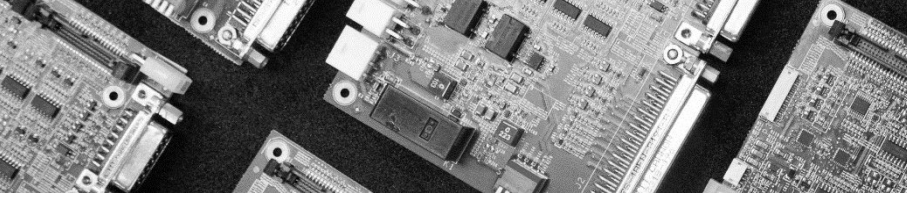

ECA10

10W ULTRAMINIATURE ENCAPSULATED SWITCHING POWER SUPPLIES

MODEL NUMBER

OUTPUT VOLTAGE

OUTPUT AMPS FL

RIPPLE/NOISE

EFFICIENCY TYP AT NOM. INPUT


DUAL OUTPUT – PCB Mount				
EDCA-0106	±12VDC	±0.42A	±100mV pk-pk	75%
EDCA-0107	±15VDC	±0.34A	±100mV pk-pk	75%
EDCA-0108	5/12VDC	1/0.42A	±100mV pk-pk	74%
DUAL OUTPUT – Chassis Mount				
EDCC-5006	±12VDC	±0.42A	±100mV pk-pk	71%
EDCC-5007	±15VDC	±0.34A	±100mV pk-pk	71%
EDCC-0108	5/12VDC	1/0.42A	±100mV pk-pk	74%
DUAL OUTPUT – DIN Rail Mount				
EDCC-5006/DRL	±12VDC	±0.42A	±100mV pk-pk	71%
EDCC-5007/DRL	±15VDC	±0.34A	±100mV pk-pk	71%
EDCC-0108/DRL	5/12VDC	1/0.42A	±100mV pk-pk	74%
TRIPLE OUTPUT – PCB Mount				
ETCA-0109	5 ±12VDC	1.5 ±0.1A / 1.8 ±0.13A	50 ±75 mV pk-pk	71%
ETCA-0111	5 ±15VDC	1.4 ±0.1A / 1.8 ±0.13A	50 ±75 mV pk-pk	71%
TRIPLE OUTPUT – Chassis Mount				
ETCC-0109	5 ±12VDC	1.5 ±0.1A / 1.8 ±0.13A	50 ±75 mV pk-pk	71%
ETCC-0111	5 ±15VDC	1.4 ±0.1A / 1.8 ±0.13A	50 ±75 mV pk-pk	71%
TRIPLE OUTPUT – DIN Rail Mount				
ETCC-0109/DRL	5 ±12VDC	1.5 ±0.1A / 1.8 ±0.13A	50 ±75 mV pk-pk	71%
ETCC-0111/DRL	5 ±15VDC	1.4 ±0.1A / 1.8 ±0.13A	50 ±75 mV pk-pk	71%

These Specifications are subject to change at any time without prior notification
All specifications are typical at nominal input, full load, and 25DegC unless otherwise noted
*These are stress ratings. Exposure of the devices to any of these conditions may adversely affect long-term reliability.
Proper operation under conditions other than the standard operating conditions is neither warranted nor implied.


ECA10

10W ULTRAMINIATURE ENCAPSULATED SWITCHING POWER SUPPLIES


MECHANICAL DIMENSION- CHASSIS MOUNT

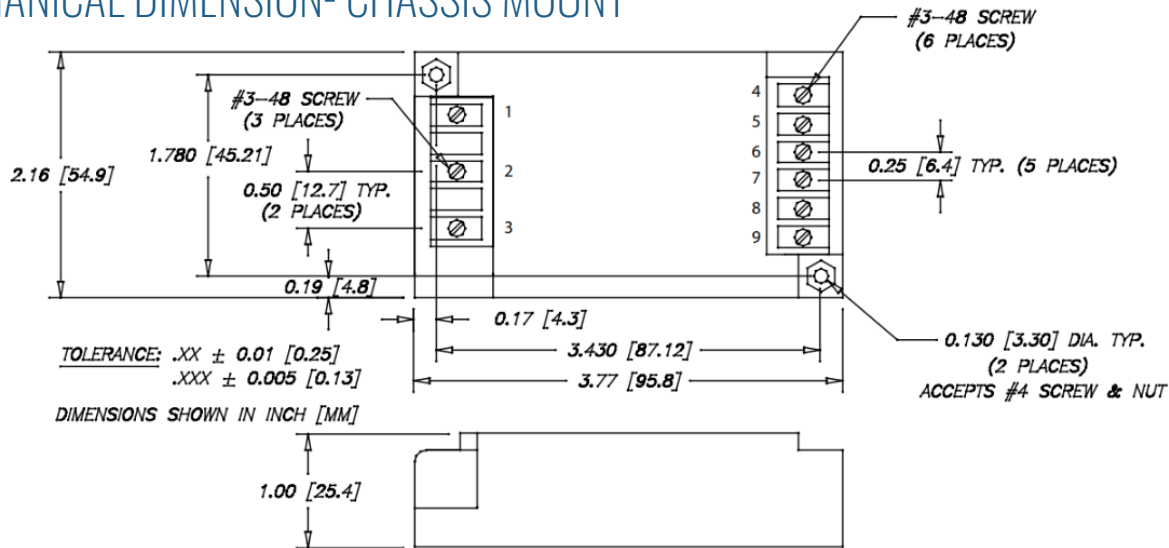

MECHANICAL DIMENSION

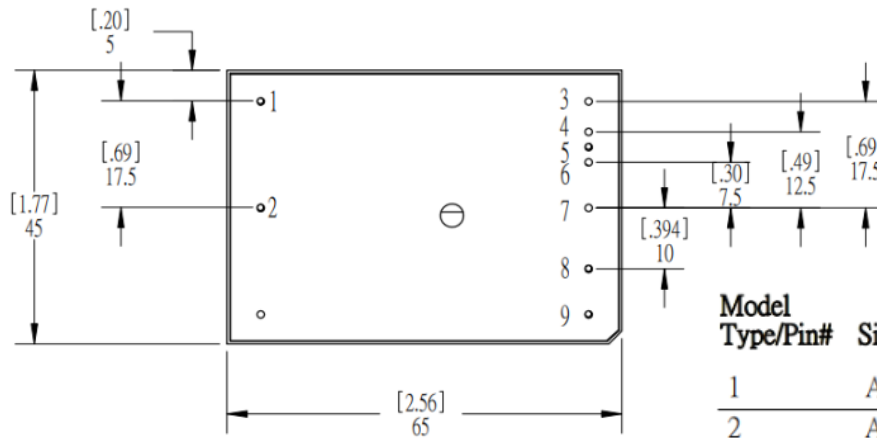


PIN-OUT VIEWED FROM BOTTOM

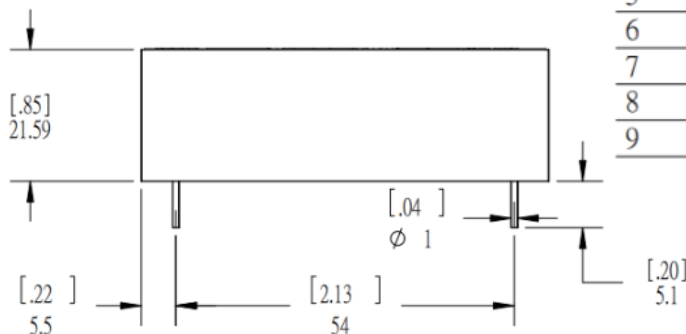

Model Type/Pin#	Single	Dual	Dual(0108)	Triple
1	ACL	ACL	ACL	ACL
2	ACN	ACN	ACN	ACN
3	No Pin	No Pin	No Pin	+Vout
4	No Pin	No Pin	No Pin	Com
5	+Vout	+Vout	+12V	No Pin
6	No Pin	No Pin	No Pin	-Vout
7	No Pin	Com	+5Vout	+5Vout
8	-Vout	-Vout	Com	+5VRTN
9	No Pin	No Pin	No Pin	No Pin


1. All dimension in mm [inch]
2. tolerance : .XX ± 0.508 [0.02]
.XXX ± 0.254 [0.01].

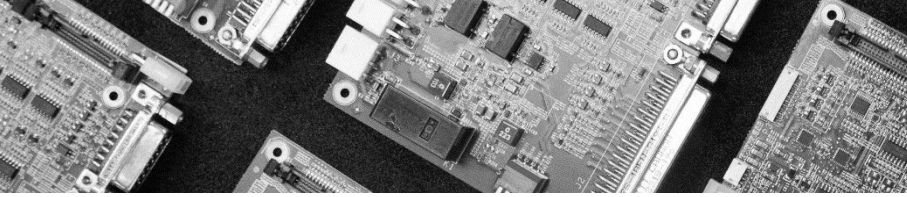

ECA10

10W ULTRAMINIATURE ENCAPSULATED SWITCHING POWER SUPPLIES

MECHANICAL DIMENSION- DIN RAIL

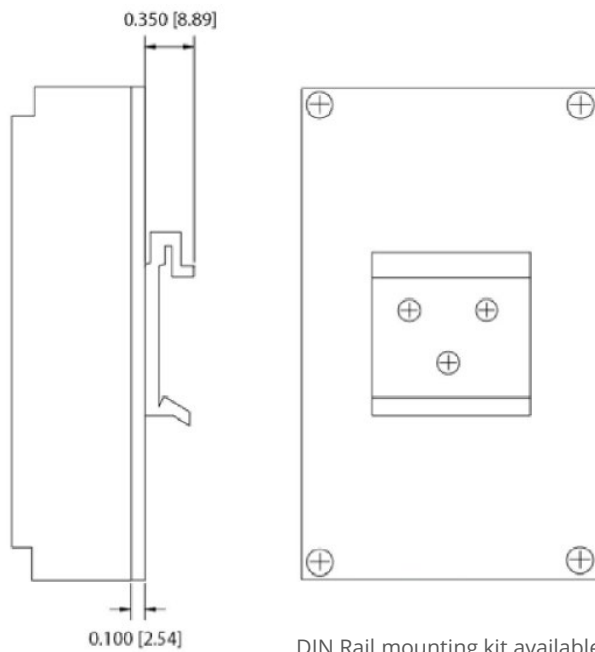

DIN Rail mounting kit available for Chassis-mount modules specifies part # M-DRL-01. Kit includes mounting plate, DIN Rail clip, and assembly hardware.

Model Type / Pin#	Single	Dual	Dual (0108)	Triple
1	ACN	ACN	ACN	ACN
2	N/C	N/C	N/C	N/C
3	ACL	ACL	ACL	ACL
4	N/C	N/C	N/C	N/C
5	-Vout	-Vout	Com	+5VRTN
6	-Vout	Com	Com	+5Vout
7	+Vout	Com	+5V	-Vout
8	+Vout	+Vout	+12V	Com
9	N/C	N/C	N/C	+Vout

DERATE CURVE

