

Features

Unregulated Converters

- 1:1 Input Range
- Efficiency up to 80%
- 3kVDC and 4kVDC Isolation Option
- Approved for Medical Applications
- -40°C to +100°C Operating Temperature Range
- Continuous Short Circuit Protection

Selection Guide

Part Number SMD	Isolation Voltage (kV)	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (typ.)	Capacitive Load (max.)
RAM-0505S*	3	5	5	200	78%	1000µF
RAM-1205S*	3	12	5	200	80%	1000µF
RAM-2405S*	3	24	5	200	80%	1000µF

* add Suffix "H" for Isolation 4kVDC/1min. e.g. RAM-0505S/H

* add Suffix "-R" for tape&reel packing e.g. RAM-1205S-R or RAM-2405S/H-R

Specifications (measured at $T_A = 25^\circ\text{C}$, nominal input voltage and rated output current unless otherwise specified)

Input Voltage Range			±10%
Output Voltage Accuracy			-1% typ., ±5% max.
Line Voltage Regulation		(low line to high line at max. load)	1.2% typ., 1.5% max.
Load Voltage Regulation		(10% to 100% full load)	10% typ., 15% max.
Output Ripple and Noise (20MHz BW limited)			50mVp-p typ., 100mVp-p max.
Operating Frequency (Vin=nominal input)			20kHz min. / 50kHz typ. / 90kHz max.
Efficiency			see Selection Guide
Minimum Load = 0%		Specifications valid for 10% minimum load only	
Isolation Voltage		(tested for 1 second)	3750 VDC
		(rated for 1 minute**)	3000 VDC
Isolation Voltage	H-Suffix	(tested for 1 second)	5000 VDC
	H-Suffix	(rated for 1 minute**)	4000 VDC
Isolation Capacitance			4pF typ., 10pF max.
Isolation Resistance		(Viso=500V)	15GΩ min.
Short-Circuit Protection			continuous
Operating Temperature Range			-40°C to +100°C
Storage Temperature			-55°C to +125°C
Reflow Temperature	RoHS compliant	245°C (30 sec.), Peak 255°C (5sec.) max.	
Vapor Phase Process	(for more details see Application Notes)		230°C (90 sec.) max.
Relative Humidity			95% RH
Package Weight			1.3g
Packing Quantity		All Types	27 pcs per Tube
		All Types	500 pcs per Reel
MTBF (+25°C)	} Detailed Information see Application Notes chapter "MTBF"	using MIL-HDBK 217F	4780 x 10³ hours
MTBF (+85°C)		using MIL-HDBK 217F	1310 x 10³ hours
Certifications			
EN Medical Safety	Report: MDD1112018 + RM1112018 Medical Report + ISO14971 Risk Assessment		IEC/EN 60601-1 3rd Edition
EN General Safety	Report: SPCLVD1112018		EN60950-1, 2nd Edition

**Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

ECONOLINE
DC/DC-Converter

RECOM


1 Watt SMD Single Output



EN-60601-1 Certified
EN-60950-1 Certified

RAM

Derating-Graph (Ambient Temperature)

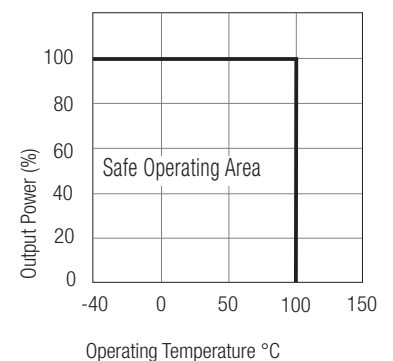

Refer to Application Notes

ECONOLINE




DC/DC-Converter

RAM Series

Typical Characteristics

Tolerance Envelope


RAM-xx05S

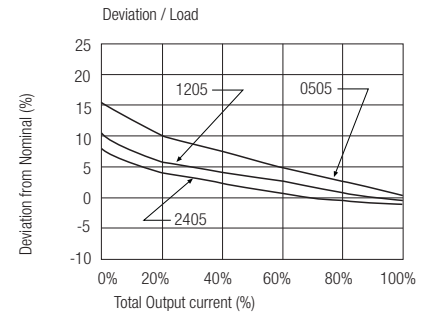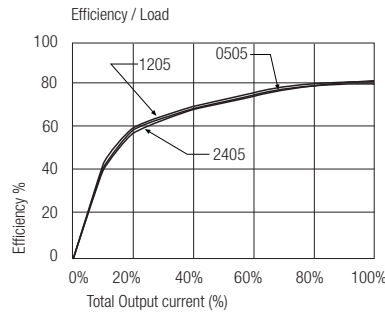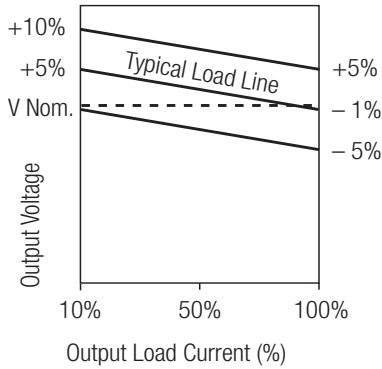

Notes




Note 1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter

EMC Filtering - Suggestion for EN55022 Class B

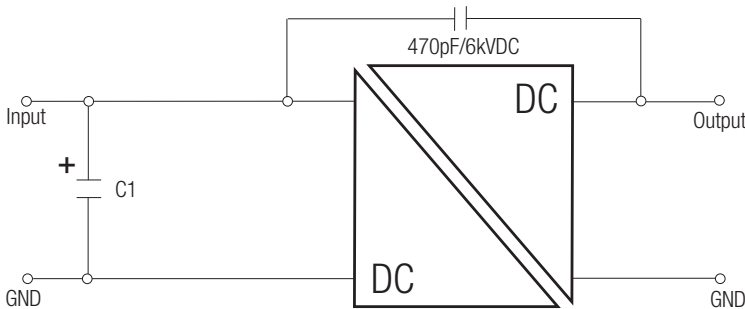


Input Voltage	Inductance/ Capacitance (C1)
5V	10µF
12V	4.7µF
24V	22µF

Package Style and Pinning

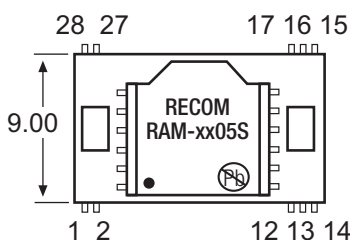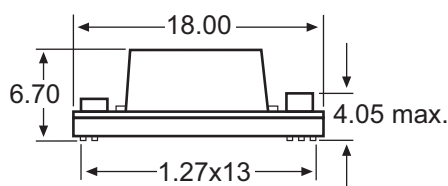

Recommended Footprint Details

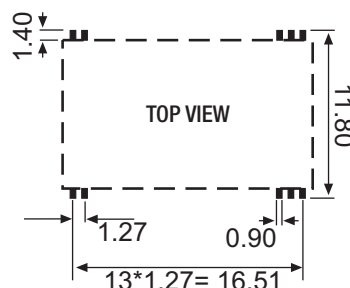

Pin Connections

Pin #	Function
1	+Vin
2	-Vin
12	-Vout
13	+Vout
14~17	NC
27,28	NC

Unit: mm
Tolerance: ± 0.25 mm

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.