

1S4AE_3UP Series

1W, Fixed input voltage, isolated & unregulated single output
DC-DC Converter



DC-DC Converter

1 Watt

- Continuous short-circuit protection
- No-load input current as low as 5mA
- Operating temperature range: -40°C to +105°C
- High efficiency up to 85%
- Isolation voltage: 1.5kVDC/min, 3kVDC/1s
- International standard pin-out
- Compact SIP package
- UL62368, EN62368 approval

The 1S4AE_3UP series are specially designed for applications where an isolated voltage is required in a distributed power supply system. They are suitable for: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.



Output specifications				
Item	Test condition	Min	Max	Units
Short Circuit Protection		Continuous, self-recovery		
Operating Temperature	Derating if the temperature ≥85°C, (see Fig. 2)	-40	105	°C
Storage Temperature		-55	125	°C
Casing Temperature Rise	Ta=25°C • 3.3VDC output • Other output	25 15		°C
Pin Welding Resistance Temperature	Welding spot is 1.5mm away from the casing, 10 seconds		300	°C
Storage Humidity	Non-condensing		95	%RH
Switching Frequency	100% load, nominal input voltage		270	KHz
MTBF	MIL-HDBK-217F@25	3500,000		h
Casing Material	Black flame-retardant and heat-resistant plastic (UL94 V-0)			
Package Dimensions	11.60*6.00*10.16mm			
Weight	1.3g(Typ.)			
Cooling methods	Free air convection			

Isolation specifications					
Item	Test condition	Min	Typ	Max	Units
Isolation voltage	IO, leak current lower than 1mA				
	• 1 minute test time	1500			VDC
	• 1 second test time	3000			VDC
Isolation resistance	IO, test at 500VDC	1000			MΩ
Isolation capacitance	IO, 100KHz/0.1V		20		pF

Input specifications					
Item	Test condition	Min	Typ	Max	Units
Input current (full load / no-load)	• 3.3/5VDC output	270/5	286/10		mA
	• 9/12VDC output	241/12	254/20		mA
	• 15/24VDC output	241/18	254/30		mA
Reflected ripple current*			15		mA
Surge Voltage (1sec. max.)		-0.7	9		VDC
Input filter	Capacitor filter				
Hot plug	Unavailable				

* Reflected ripple current testing method please see DC-DC Converter Application Notes for specific operation.

Output specifications					
Item	Test condition	Min	Typ	Max	Units
Output voltage accuracy	See tolerance envelope curve(Fig. 1)				
Line regulation	Input voltage change: $\pm 1\%$				
	• 3.3VDC output			1.5	%
	• Others			1.2	%
Load regulation	10% to 100% load				
	• 3.3VDC output		15	20	%
	• 5VDC output		10	15	%
	• 9VDC output		8	10	%
	• 12VDC output		7	10	%
	• 15VDC output		6	10	%
	• 24VDC output		5	10	%
Ripple & Noise*	20MHz Bandwidth				
	• Other output		30	75	mVp-p
	• 24VDC output		50	100	mVp-p
Temperature Drift Coefficient	100% load		± 0.02		%/ $^{\circ}\text{C}$

Note: *Ripple and noise tested with "parallel cable" method, please see DC-DC Converter Application Notes for specific operation methods.

EMC specifications				
EMI	CE	CISPR32/EN55032	CLASS B (EMC recommended circuit)	
EMI	RE	CISPR32/EN55032	CLASS B (EMC recommended circuit)	
EMS	ESD	IEC/EN61000-4-2	Air $\pm 8\text{kV}$, Contact $\pm 4\text{kV}$ perf. Criteria B	

Example:

1S4AE_0503S3UP

1 = 1Watt; S4 = SIP4; A = Pinning; E = Cost effective; 05 = 5Vin;
03 = 3Vout; S = Single Output; 3 = 3kVDC; U = Unregulated output;
P = Short circuit protection

Note:

- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- The maximum capacitive load offered were tested at input voltage range and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta = 25°C, humidity <75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our Company's corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

1S4AE_3UP Series

1W, Fixed input voltage, isolated & unregulated single output
DC-DC Converter

Product Selection Guide

Part Number	Certification	Input Voltage [VDC] Nominal	Input Voltage [VDC] Range	Output Voltage [VDC]	Output Current [mA, Max./Min]	Efficiency ⁽²⁾ [% , Min./Typ.] @ Full Load	Capacitive load [μF, Max]
1S4AE_0503S3UP	UL	5	4.5-5.5	3.3	303/30	70/74	2400
1S4AE_0505S3UP	UL	5	4.5-5.5	5	200/20	78/82	2400
1S4AE_0512S3UP	UL	5	4.5-5.5	9	111/12	79/83	1000
1S4AE_0512S3UP	UL	5	4.5-5.5	12	84/9	79/83	560
1S4AE_0515S3UP	UL	5	4.5-5.5	15	67/7	79/83	560
1S4AE_0524S3UP	UL	5	4.5-5.5	24	42/4	81/85	220

Typical Characteristic Curves

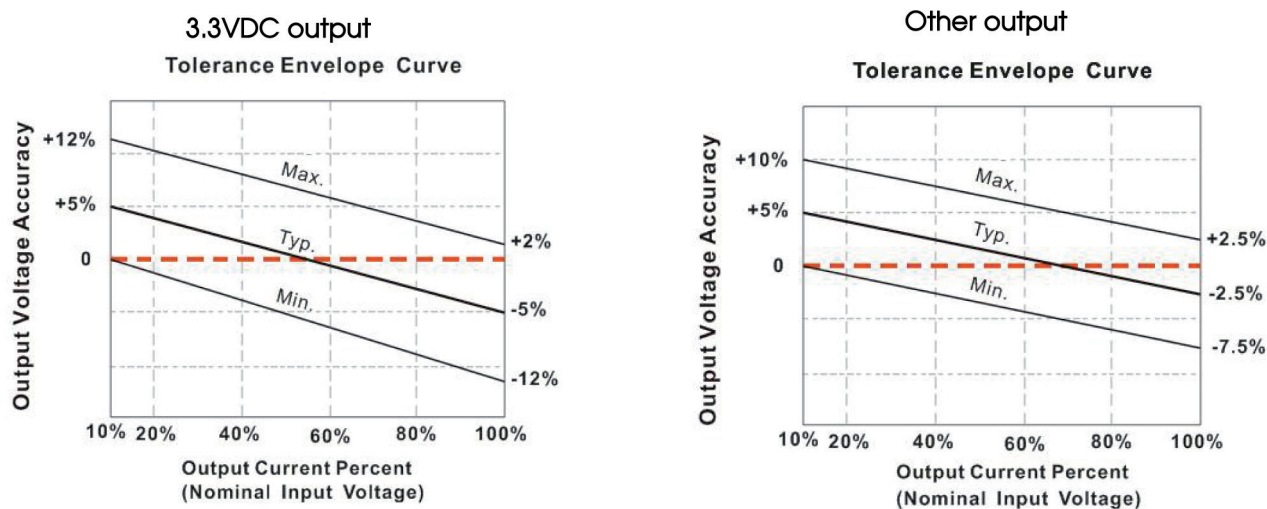


Fig. 1


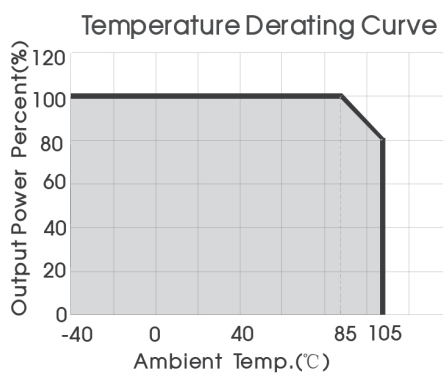


Fig. 2

1S4AE_3UP Series


1W, Fixed input voltage, isolated & unregulated single output
DC-DC Converter

Efficiency curves

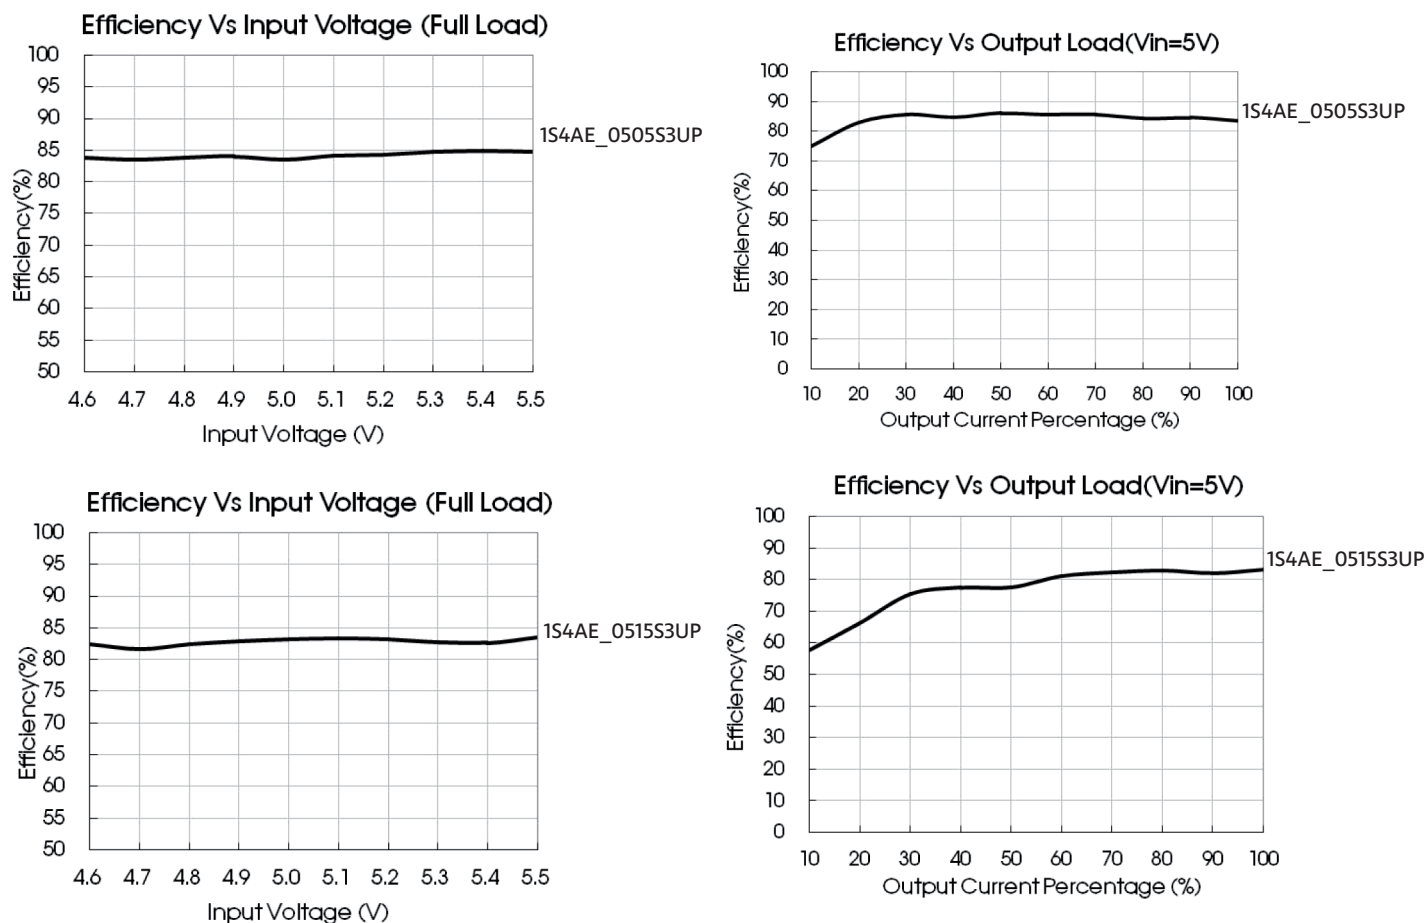

Typical application

If it is required to further reduce input and output ripple, a filter capacitor can be connected to the input and output terminals, see Fig.3. Moreover, choosing suitable filter capacitor is very important, start-up problems may be caused by too large capacitance. To ensure the modules running well, the recommended capacitive load values as shown in Table 1.

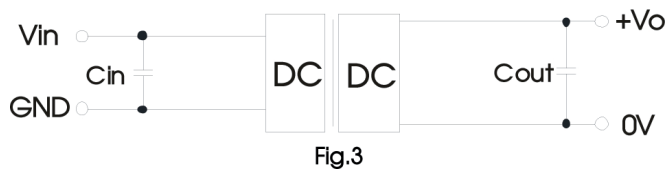

Recommended capacitive load value table (Table 1)

Vin (VDC)	Cin(μF)	Vout (VDC)	Cout (μF)
5	4.7	3.3/5	10
		9/12	2.2
		15/24	1

1S4AE_3UP Series

1W, Fixed input voltage, isolated & unregulated single output
DC-DC Converter

EMC solution-recommended circuit

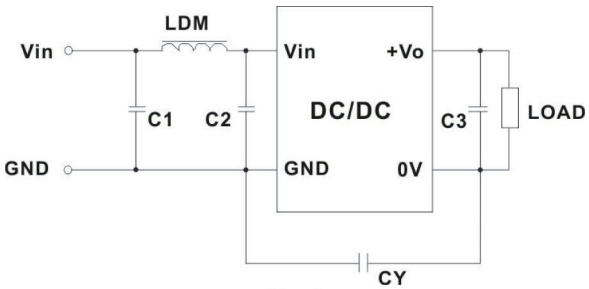


Fig. 4

EMC recommended circuit value table (Table 2)

Input voltage 5VDC	Output voltage (VDC)		3.3/5/9	12/15/24
	EMI	C1/C2	4.7μF /25V	4.7μF /25V
		CY		1nF/4KVDC VISHAY HGZ102MBP TDK CD45-E2GA102M-GK
		C3	Refer to the Cout in table 1	
		LDM	6.8μH	6.8μH

Note: In the case of actual use, the requirements for EMI are high, it is subject to CY.

Mechanical dimensions and recommended layout

