

Features

Regulated Converter

- Built-in active PFC
- Efficiency up to 88%
- Isolated output 3kVAC / 1 minute
- SCP, OVP, OLP, OTP protection
- Operating temperature range -20°C to +70°C
- Universal input 90-264VAC / 120VDC-370VDC
- Conformal coating

RECOM
AC/DC Converter

RACG150

**150 Watt
Single
Output**



Description

These industrial grade power supplies have been designed to give many years of trouble-free life. Despite their low cost, they use high grade electrolytic capacitors to ensure heavy industry performance levels, working reliably over an extended temperature and world-wide input voltage range. The RACG series are more compact than the standard industry size, yet offer higher performance with full output protection (SCP, OVP, OTP, OLP), active power factor correction and improved input surge, hold-up time and efficiency ratings. The power supplies can be mounted horizontally or vertically and are certified to CE, UL and Class B EMC standards. Typical uses are industrial, commercial and high reliability applications. The RACG series come with a 3 year warranty.


Selection Guide

Part Number	Input Voltage Range [VAC]	Input Current max. [A]	nom. Output Voltage [VDC]	Adj. Output Voltage ⁽¹⁾ [VDC]	Output Current max. [A]	Efficiency typ. ⁽²⁾ [%]
RACG150-12S	90-264	1.9	12	10.8-13.2	12.5	86
RACG150-24S	90-264	1.9	24	21.6-26.4	6.3	87
RACG150-48S	90-264	1.9	48	43.2-52.8	3.2	88

Notes:

Note1: For detail information please refer to graph on page PA-2

Note2: Efficiency is tested at 230VAC and full load at +25°C ambient

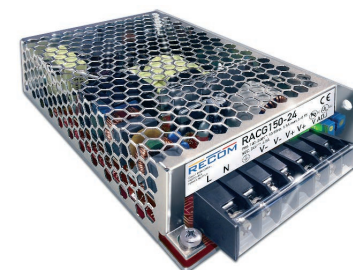

Model Numbering



Ordering Examples:

RACG150-12S	150 Watt	12Vout	Single Output
RACG150-48S	150 Watt	48Vout	Single Output

Specifications (measured at Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up)

BASIC CHARACTERISTICS					
Parameter	Condition		Min.	Typ.	Max.
Input Voltage Range ⁽³⁾	nom. Vin = 230VDC		90VAC 120VDC		264VAC 370VDC
Inrush Current	cold start at +25°C	115VAC 230VAC			30A 45A
No load Power Consumption				3W	
Input Frequency Range			47Hz		63Hz
Minimum Load				0%	
Power Factor	115VAC 230VAC			0.98 0.95	
Set-up Time	115VAC 230VAC				3s 2s
Hold-up Time	230VAC			18ms	
continued on next page					

EN60950 certified
CAN/CSA-C22.2 No. 60950 certified
UL No. 60950 certified
EN55032 compliant
EN55024 compliant

**SEARCHING FOR
ALTERNATIVES?**

Contact RECOM

<https://recom-power.com/contact.html>

Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

BASIC CHARACTERISTICS



Parameter	Condition	Min.	Typ.	Max.
Output Voltage Adjustability			±10%	
Output Ripple and Noise ⁽⁴⁾	0°C to +70°C -20°C to 0°C		100mVp-p 200mVp-p	

Notes:


Note3: The products were submitted for safety files at AC-Input operation

Note4: Measured @ 20MHz Bandwidth with a 0.1µF parallel capacitor

Efficiency vs. Load

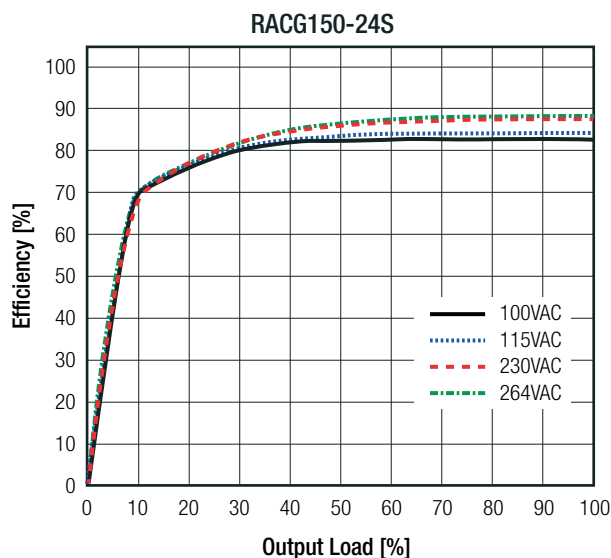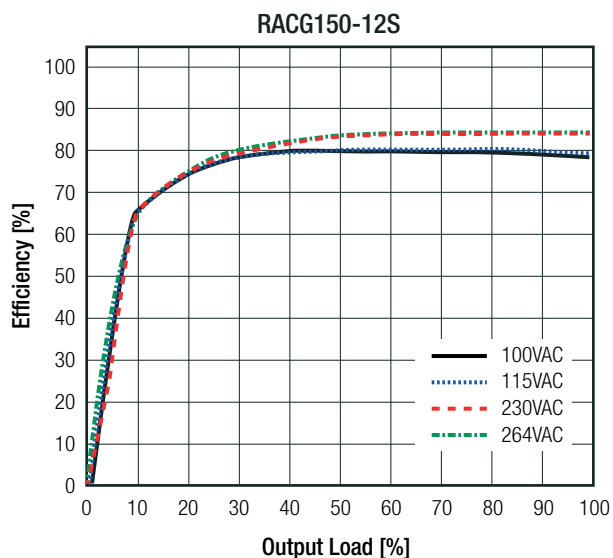

Output Voltage Adjustability Derating

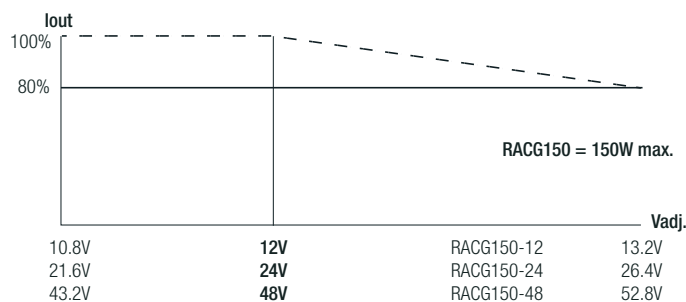

REGULATIONS

Parameter	Condition	Value
Output Accuracy		±2.0% max.
Line Regulation	low line to high line, full load	±0.5% max.
Load Regulation	12Vout	2.0% max.
	24Vout, 48Vout	1.0% max.


Specifications (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up)

PROTECTIONS

Parameter	Type		Value
Input fuse ⁽⁵⁾	internal		T5A, slow blow
Short Circuit Protection (SCP)			continuous, hiccup and auto recovery
Over Voltage Protection (OVP)			115% - 150% of rated output voltage, continuous, hiccup and auto recovery
Over Current Protection (OCP)			105% - 150% of rated output voltage, continuous, hiccup and auto recovery
Over Temperature Protection (OTP)	detected on Mosfet temperature		+105°C ±5°C auto restart after cooling down to +60°C
Isolation Voltage	tested for 1 minute	I/P to O/P	3kVAC
		I/P to case	1.5kVAC
		I/P to case	500VAC
Isolation Resistance			100MΩ min.
Leakage Current	I/P to O/P		0.25mA max.
	I/P to case		3.5mA max.
Notes:			
Note5: Refer to local safety regulations if input over-current protection is also required			

ENVIRONMENTAL

Parameter	Condition		Value
Operating Temperature Range	full load		-20°C to +40°C
	refer to derating graph		-20°C to +70°C
Temperature Coefficient			0.03%/K
Operating Altitude			5000m
Operating Humidity	non-condensing		20% - 90% RH max.
MTBF	according to MIL-HDBK-217F, G.B.	+25°C	200 x 10 ³ hours

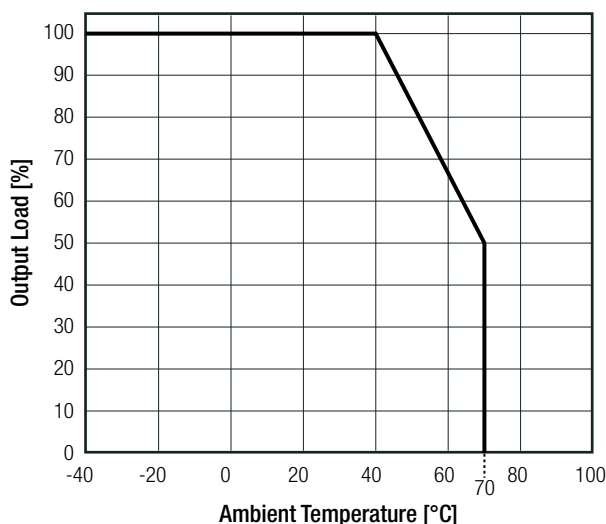Derating Graph


Specifications (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up)

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	E196683	CAN/CSA-C22.2 No. 60950-1 UL No. 60950-1
Information Technology Equipment, General Requirements for Safety		EN60950-1:2006 + A2:2013
EAC Safety of Low Voltage Equipment	RU-AT.49.09571	TP TC 004/2011
RoHS2+		RoHS-2011/65/EU + AM-2015/863
EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment – Emission Requirements		EN55032:2015; Class B
Information technology equipment - Immunity characteristics - Limits and methods of measurement		EN55024:2010 + A1:2015
ESD Electrostatic discharge immunity test	contact $\pm 2.0, 4.0\text{kV}$	EN61000-4-2:2009; Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	3V/m	EN61000-4-3:2006 + A2:2010; Criteria A
Fast Transient and Burst Immunity	AC Power Port: $\pm 1.0\text{kV}$	EN61000-4-4:2012; Criteria A
Surge Immunity	AC Power Port: L-N $\pm 1.0\text{kV}$ L-PE, N-PE $\pm 2.0\text{kV}$	EN61000-4-5:2014; Criteria B
Immunity to conducted disturbances, induced by radio-frequency fields	AC Power Port 3V	EN61000-4-6:2014; Criteria A
Power Magnetic Field Immunity	50Hz, 1.0A/m	EN61000-4-8:2010; Criteria A
Voltage Dips and Interruption	Voltage Dips >95% Voltage Dips 30% Voltage Interruptions > 95%	EN61000-4-11:2004; Criteria A EN61000-4-11:2004; Criteria A EN61000-4-11:2004; Criteria C
Limits of Harmonic Current Emissions		EN61000-3-2:2014, Class A
Limits of Voltage Fluctuations & Flicker		EN61000-3-3:2013





DIMENSION AND PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	case	aluminium
Dimension (LxWxH)		160.0 x 98.0 x 38.0mm
Weight		610g typ.

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up)

Dimension Drawing (mm)

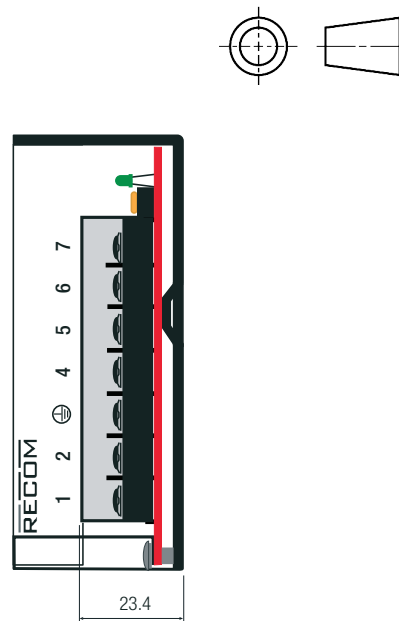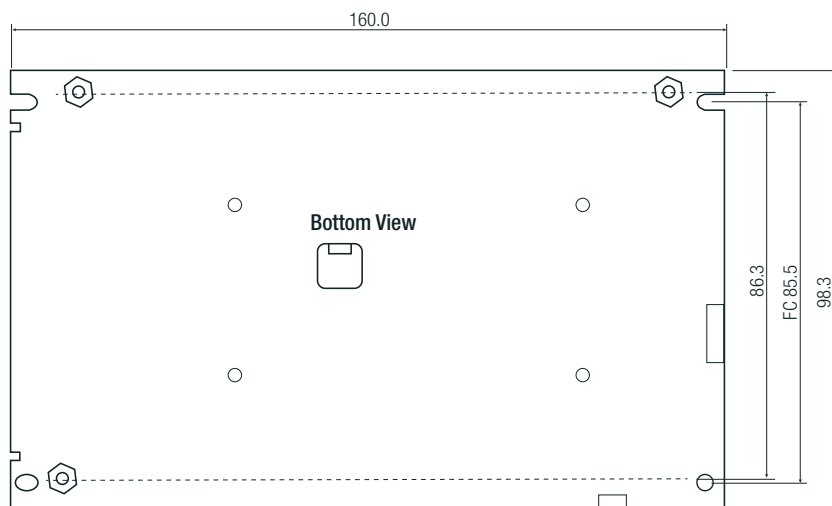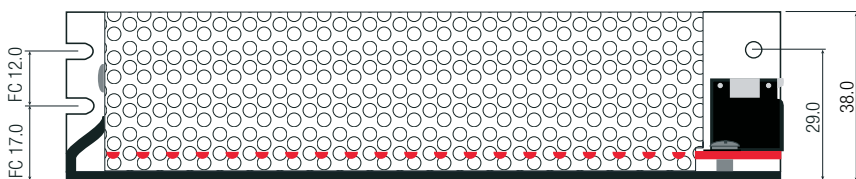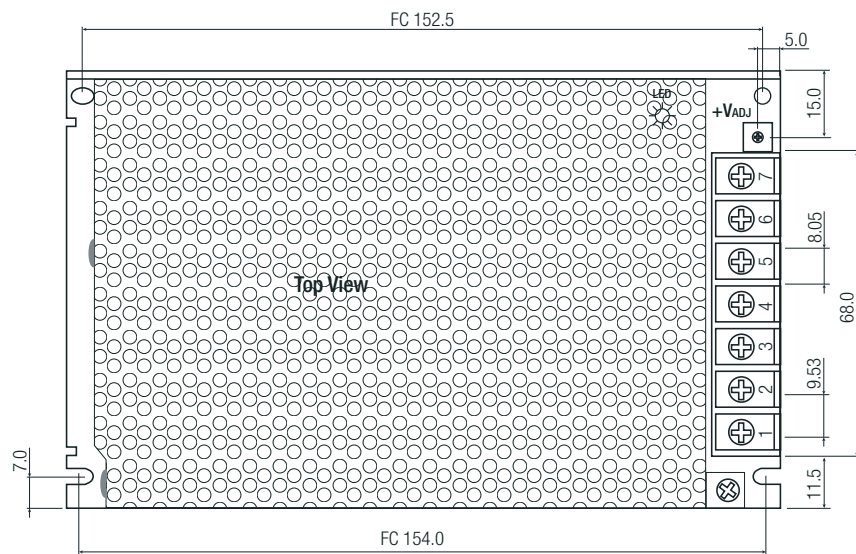

Connections

Pin #	Single
1	VAC in (L)
2	VAC in (N)
3	GND
4	-Vout
5	-Vout
6	+Vout
7	+Vout

FC: fixing center

Tolerance: xx.x= ±0.5mm

xx.xx= ±0.35mm

Wire diameter: 0.75 to 3.0mm²

PACKAGING INFORMATION

Parameter	Type	Value
Packaging Dimension (LxWxH)	cardboard box	170.0 x 102.0 x 45.0mm
Packaging Quantity		1pcs
Storage Temperature Range		-30°C to +85°C
Storage Humidity	non-condensing	10% - 90% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.