


Data Sheet | Item Number: 288-368
Relay module; Nominal input voltage: 24 VDC; 1 break contact;
Limiting continuous current: 5 A; Module width: 13 mm; 2,50 mm²; gray
<https://www.wago.com/288-368>

DISCONTINUED:
30.06.2025

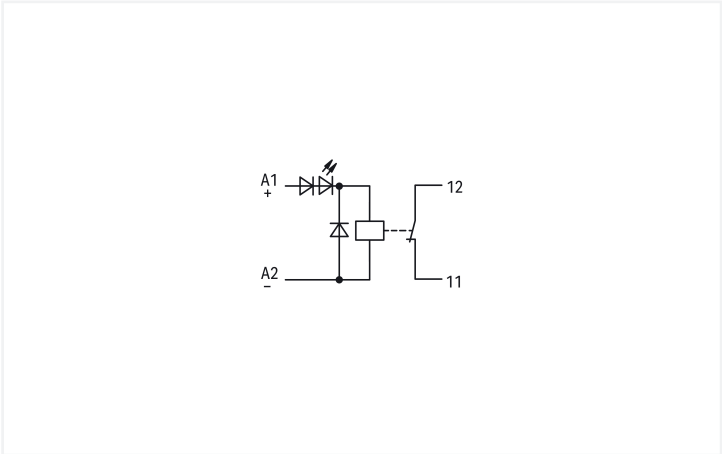

Color: ■ gray

Technical data			
Control circuit		Load circuit	
Nominal input voltage U _N	24 VDC	Number of break/switch-off contacts	1
Input voltage range	±10 %	Contact material (relay)	AgNi 0.15
Nominal input current at U _N	20 mA	Limiting continuous current	5 A
		Inrush current (resistive) max.	(AC) 16 A / 4 s
		Switching Voltage, Max.	250 VAC
		Switching power (resistive) max.	AC 1250 VA
		Pull-in time (typ.)	4 ms
		Drop-out time (typ.)	6 ms
		Bounce time (typ.)	2 ms
		Electrical life (NO; resistive load; 23 °C)	200 x 10 ³ switching operations
		Mechanical life	30 x 10 ⁶ switching operations

Safety and protection		
Rated Voltage	300 V	
Overvoltage category	II	
Pollution degree	2	
Dielectric strength (control/load circuit) (AC, 1 min)	4 kVrms	
Insulation type (control/load circuit)	Reinforced insulation (safe isolation)	
Insulation type (adjacent devices)	Reinforced insulation (safe isolation)	



Connection Data	
Connection technology	CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data	
Width	13 mm / 0.512 inches
Height	85 mm / 3.346 inches
Depth from upper-edge of DIN-rail	47 mm / 1.85 inches

Mechanical data	
Mounting type	DIN-35 rail

Material data	
Note (material data)	Information on material specifications can be found here
Color	gray
Fire load	0.276 MJ
Weight	30.9 g

Environmental requirements	
Ambient temperature (operation at U _N)	-25 ... +40 °C
Ambient temperature (storage)	-25 ... +70 °C
Processing temperature	-25 ... +50 °C
Temperature range of connection cable	≥ (T _{ambient} + 30 K)
Relative humidity	5 ... 75 % (non-condensing)
Operating altitude (max.)	2000 m

Standards and Specifications	
Standards/specifications	EN 61010-2-201

Commercial data	
Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	15 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454319946
Customs tariff number	85364900990
End of Sale	2025-06-30
End of Production	2025-10-01
End of Delivery	2025-10-30
End of Service and Repair	2026-10-31



Product Classification	
UNSPSC	39122334
eCl@ss 10.0	27-37-16-01
eCl@ss 9.0	27-37-16-01
ETIM 9.0	EC001437
ETIM 10.0	EC001437
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
CAS-No.	7439-92-1 79-94-7
REACH Candidate List Substance	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a) 7(c)-I
SCIP notification number (Austria)	78c3a30e-d327-4e80-a8db-f58445305dfd
SCIP notification number (Belgium)	84258628-d06e-46e1-a459-539b219210d9
SCIP notification number (Bulgaria)	c0227474-04e7-448e-a1cd-8de11e7aeced
SCIP notification number (Czech Republic)	653e9afe-90b1-4f87-a65a-62780f4a442a
SCIP notification number (Denmark)	22aff64b-506b-4288-aa5f-8fdb08f5c4ce
SCIP notification number (Finland)	07727d15-6c80-44cf-a88c-2bc195cdbaba
SCIP notification number (France)	24e75d3a-224e-41a4-a909-7143be21f834
SCIP notification number (Germany)	c0e3f34c-0d0b-43f9-b336-e1ef59033be0
SCIP notification number (Hungary)	1ef80721-159f-4a06-9a77-cbd3e5edca35
SCIP notification number (Italy)	48c2bce2-6f32-4288-9f78-0bcf8b888266
SCIP notification number (Netherlands)	dd8a142c-7dd5-4a8a-a957-2e82d7868a4e
SCIP notification number (Poland)	ccf99a22-c2c7-472e-a6ff-b6a61e659f37
SCIP notification number (Romania)	742e7dce-c631-456f-a744-1bd7d5b8c94c
SCIP notification number (Sweden)	505842d3-f7cc-4713-8aed-6af1a2392857

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03080
Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 288-368			

Documentation

Bid Text			
288-368	19.02.2019	xml 3.85 KB	
288-368	20.02.2019	docx 15.70 KB	

Instruction Leaflet			
Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB	

CAD/CAE-Data

CAD data	
2D/3D Models 288-368	

CAE data	
EPLAN Data Portal 288-368	
WSCAD Universe 288-368	
ZUKEN Portal 288-368	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 709-196
Marking strips; for laser printer; translucent



Item No.: 709-177
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.2 Tool


1.1.2.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination




Conductor termination – screwdriver actuation parallel to conductor entry




Conductor termination – screwdriver actuation perpendicular to conductor entry

Installation



Snapping a module onto DIN-rail.



Removing a module from the DIN-rail.