

Timer modules



Machines for
ceramics



Machines
for paper
processing



Printing
machines



Packaging
machines




Wood-
processing
machines



Milk processing
plant



Textile machines



86
SERIES


Timer modules for use in conjunction with relay & socket
86.00 - Multi-function & multi-voltage timer module
86.30 - Bi-function & multi-voltage timer module

- Timer module type 86.00 for 90, 92, 96 series sockets and type 86.30 for 90, 92, 94, 95, 96, 97 series sockets
- Wide supply voltage range:
12...240 V AC/DC (86.00)
12...24 V AC/DC, 110...125 V AC or 230...240 V AC (86.30)
- LED indicator
- ATEX versions available

86.00


- Time scale: from 0.05 s to 100 h
- Multi-function
- Plug-in for use with 90.02, 90.03, 92.03 and 96.04 sockets

AI: On-delay
DI: Interval
SW: Symmetrical flasher (starting pulse on)
BE: Off-delay with control signal
CE: On- and off-delay with control signal
DE: Interval with control signal on
EE: Interval with control signal off
FE: Interval with control signal on and off

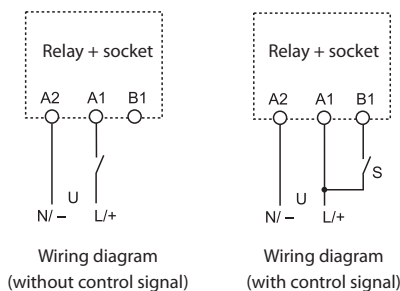

* For ATEX versions, refer to the "Other data" table on the page 4

For outline drawing see page 5

Contact specification*

Contact configuration	
Rated current/Maximum peak current	A
Rated voltage/Maximum switching voltage	V AC
Rated load AC1	VA
Rated load AC15 (230 V AC)	VA
Single phase motor rating (230 V AC)	kW
Breaking capacity DC1: 24/110/220 V	A
Minimum switching load	mW (V/mA)
Standard contact material	

Supply specification*

Nominal voltage (U _N)	V AC (50/60 Hz)	
	V DC	
Rated power AC/DC	W	
Operating range	V AC (50/60 Hz)	
	DC	


Technical data

Specified time range	
Repeatability	%
Recovery time	ms
Minimum control impulse	ms
Setting accuracy full range	%
Electrical life at rated load in AC1	cycles
Ambient temperature range	°C
Protection category	

Approvals (according to type)
86.30


- Time scale: from 0.05 s to 100 h
- Bi-function
- Plug-in for use with 90.02, 90.03, 92.03, 94.P3, 94.P4, 94.02, 94.03, 94.04, 95.P3, 95.P5, 95.03, 95.05, 96.02, 96.04, 97.P1, 97.P2, 97.01 and 97.02 sockets

AI: On-delay
DI: Interval



See 56, 60 and 62 series relays
Note: Do not use with relays 62.3x.x012.x300 and 62.3x.x012.x600

See 40, 46, 55, 56, 60 and 62 series relays

Ordering information

Example: 86 series multi-function timer module, (12...240)V AC/DC supply voltage.

8 6 . 0 0 . 0 . 2 4 0 . 0 0 0 0

Series

Type

0 = Multi-function (AI, DI, SW, BE, CE, DE, EE, FE)

3 = Bi-function (AI, DI)

No. of poles

See 40, 46, 55, 56, 60 and 62 series relays

Poles for chosen relay/socket combination - according to chart below

Supply voltage

024 = (12...24)V AC/DC (86.30 only)

120 = (110...125)V AC (86.30 only)

240 = (12...240)V AC/DC (86.00 only)

240 = (12...48)V AC/DC

(86.00.0.240.0073 only)

240 = (230...240)V AC (86.30 only)

Supply version

0 = AC (50/60 Hz)/DC

8 = AC (50/60 Hz)

Combinations


Number of poles	Relay type	Socket type	Timer module
1	40.31	95.P3/95.03	86.30
1	40.51/61	95.P5/95.05	86.30
1	46.61	97.P1/97.01	86.30
2	40.52/40.62	95.P5/95.05	86.30
2	46.52	97.P2/97.02	86.30
2	55.32	94.P4/94.02	86.30
2	56.32	96.02	86.30
2	60.12	90.02	86.00/86.30
2	62.32	92.03	86.00/86.30
3	55.33	94.P3/94.03	86.30
3	60.13	90.03	86.00/86.30
3	62.33	92.03	86.00/86.30
4	55.34	94.P4/94.04	86.30
4	56.34	96.04	86.00/86.30

Other data Timer ATEX versions

Code available	Nominal voltage	Operating range	Use temperature
86.30.0.024.0073	12-24 V AC/DC	9.6...33.6 V AC/DC	-20...+50°C

Markings - ATEX versions - ATEX, II 3G Ex ec IIC Gc

MARKING	
	Specific marking of explosion protection
II	Component for surface plant (different from mines)
3	Category 3: normal level of protection
GAS	G Explosive atmosphere due to presence of combustible gas vapour or mist
	Ex ec Increased security
	IIC Gas group
	Gc Equipment Protection Level
-20 °C ≤ Ta ≤ +50 °C Ambient temperature	
EPTI 17 ATEX 0264 U EPTI: laboratory which issues the CE type certificate 17: year of issue of certificate 0264: number of CE type certificate	
U: ATEX component	



Technical data

EMC specifications				
Type of test		Reference standard	86.00	86.30
Electrostatic discharge	contact discharge	EN 61000-4-2	4 kV	n.a.
	air discharge	EN 61000-4-2	8 kV	8 kV
Radio-frequency electromagnetic field (80 ÷ 1000 MHz)		EN 61000-4-3	10 V/m	10 V/m
Fast transients (burst) (5-50 ns, 5 kHz) on Supply terminals		EN 61000-4-4	4 kV	2 kV
Surges (1.2/50 µs) on Supply terminals	common mode	EN 61000-4-5	4 kV	2 kV
	differential mode	EN 61000-4-5	4 kV	1 kV
Radio-frequency common mode (0.15 ÷ 80 MHz) on Supply terminals		EN 61000-4-6	10 V	10 V
Radiated and conducted emission		EN55022	class B	class B
Other data		86.00	86.30	
Current absorption on signal control (B1)		mA	1	—
Power lost to the environment	without contact current	W	0.1 (12 V) - 1 (230 V)	0.2
	with rated current		See 56, 60 and 62 series relays	See 40, 46, 55, 56, 60, 62 series relays
Max. wire size		solid cable		
		mm ²	1 x 4 / 2 x 2.5	1 x 4 / 2 x 2.5
		AWG	1 x 12 / 2 x 14	1 x 12 / 2 x 14

Times scales

1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3
(0.05...1)s	(0.5...10)s	(5...100)s	(0.5...10)min	(5...100)min	(0.5...10)h	(5...100)h


NOTE: Time scales and functions must be set before energising the timer.

To achieve the minimum time setting of 0.05 seconds it is necessary to use one of the functions with control signal.


When setting very short times it may be necessary to take into account the operate time of the relay used.

Outline drawings

Type 86.00

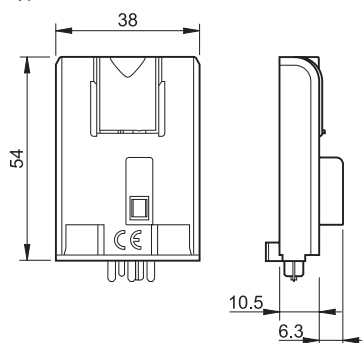

Type 86.30



Functions

 U = Supply voltage S = Signal switch

— = Output contact

LED Type 86.00	LED Type 86.30	Supply voltage	NO output contact
		OFF	Open
		ON	Open
		ON	Open (Timing in Progress)
		ON	Closed



Without control signal = Start via contact in supply line (A1).

With control signal = Start via contact into control terminal (B1).

Wiring diagram

Type 86.00

Without control signal

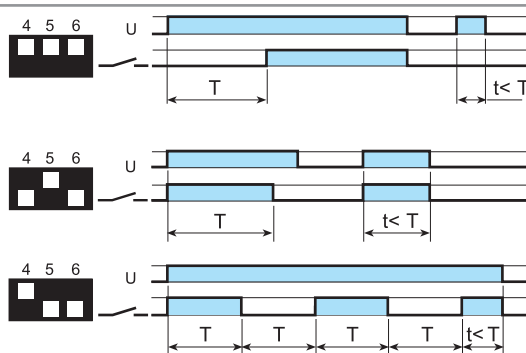**(AI) On-delay.**

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.



(DI) Interval.

Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.

(SW) Symmetrical flasher (starting pulse on).

Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ratio is 1:1 (time on = time off).

With control signal

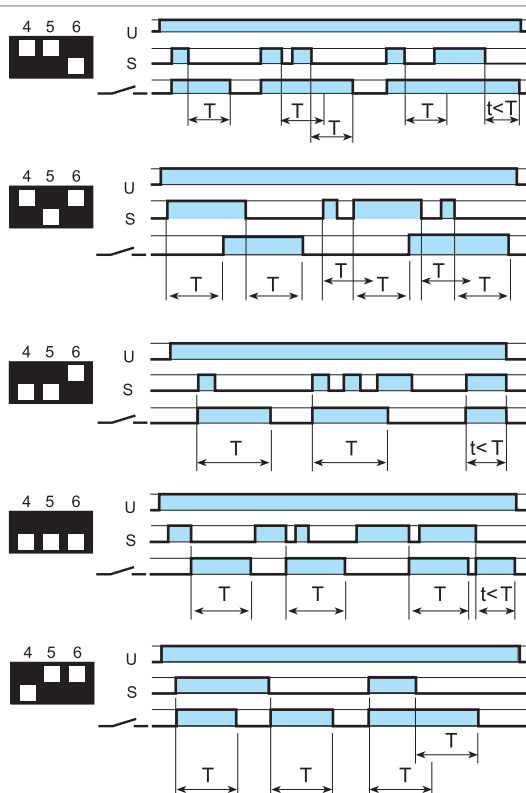**(BE) Off-delay with control signal.**

Power is permanently applied to the timer. The output contacts transfer immediately on closure of the Signal Switch (S). Opening the Signal Switch initiates the preset delay, after which time the output contacts reset.

(CE) On- and off-delay with control signal.

Power is permanently applied to the timer. Closing the Signal Switch (S) initiates the preset delay, after which time the output contacts transfer. Opening the Signal switch initiates the same preset delay, after which time the output contacts reset.

(DE) Interval with control signal on.

Power is permanently applied to the timer. On momentary or maintained closure of Signal Switch (S), the output contacts transfer, and remain so for the duration of the preset delay, after which they reset.

(EE) Interval with control signal off.



Power is permanently applied to the timer. On opening of the Signal Switch (S) the output contacts transfer, and remain so for the duration of the preset delay, after which they reset.

(FE) Interval with control signal on and off.

Power is permanently applied to the timer. Both the opening and closing of the Signal Switch (S) initiates the transfer of the output contacts. In both instances the contacts reset after the delay period has elapsed.

Wiring diagram

Type 86.30

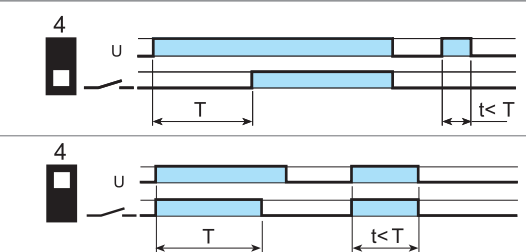
**(AI) On-delay.**

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.

(DI) Interval.

Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.

* With DC supply, positive polarity has to be connected to B1 terminal (according to EN 60204-1). Switch S should be exclusively used to provide the control signal to terminal B1. (Do not connect any other load at this point).




90.03


Approvals
(according to type):




Box clamp socket		90.02	90.02.0	90.03	90.03.0
panel or 35 mm rail (EN 60715) mount		Blue	Black	Blue	Black
For relay type		60.12		60.13	
Accessories					
Metal retaining clip		090.33			
6-way jumper link		090.06			
Identification tag		090.00.2			
Timer module		86.00, 86.30			
Technical data					
Double terminal A1 (for easy start connection)		—			
Rated values		10 A - 250 V			
Dielectric strength		2 kV AC			
Protection category		IP 20			
Ambient temperature		°C -40...+70			
 Screw torque		Nm	0.6		
Wire strip length		mm	10		
Max. wire size for 90.02 and 90.03 sockets		solid wire			
		mm ²	1 x 6 / 2 x 2.5		
		AWG	1 x 10 / 2 x 14		
				stranded wire	
				1 x 4 / 2 x 2.5	
				1 x 12 / 2 x 14	




90.02




90.02



90.03



90.03



90.03 + 60.13 + 86.00

6-way jumper link for 90.02 and 90.03 sockets

090.06


Rated values

10 A - 250 V



090.06

Approvals
(according to type):

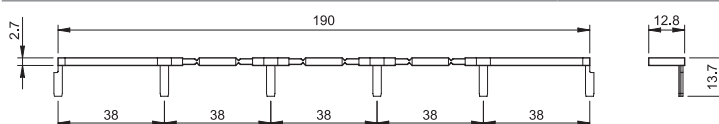

**92.03**

Approvals

(according to type):

**Box clamp socket**

panel or 35 mm rail (EN 60715) mount

For relay type

92.03**Blue****92.03.0****Black**

62.32, 62.33

Accessories

Metal retaining clip

(supplied with socket - packaging code SMA)

092.71

Identification tag

092.00.2

Timer modules

86.00, 86.30

Technical data

Rated values

16 A - 250 V

Dielectric strength

6 kV (1.2/50 μ s) between coil and contacts

Protection category

IP 20

Ambient temperature

°C

-40...+70 (see diagram L92)



Screw torque

Nm

0.8

Wire strip length

mm

10

Max. wire size for 92.03 socket

solid wire

stranded wire

mm²



1 x 10 / 2 x 4


1 x 6 / 2 x 4

AWG

1 x 8 / 2 x 12

1 x 10 / 2 x 12

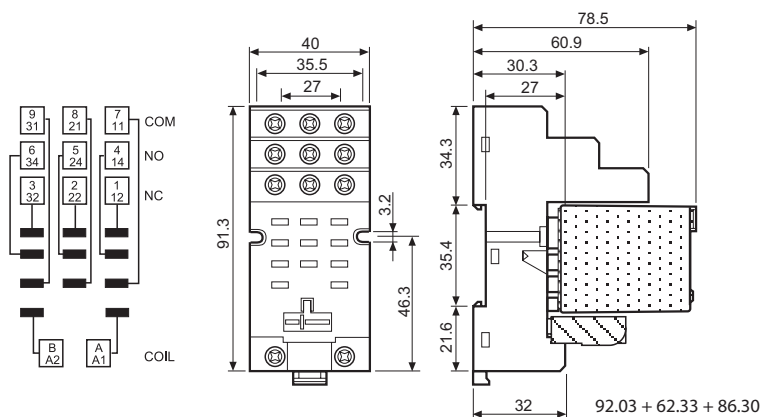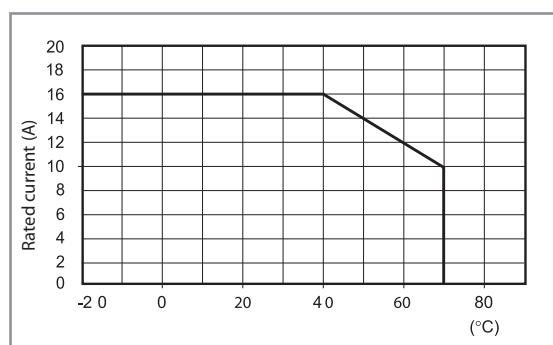L 92 - Rated current v ambient temperature




94.P4

Approvals
(according to type):




Certain relay/socket
combinations


094.91.3




060.48


Push-in terminal socket panel or 35 mm (EN 60715) rail mount		94.P3 Blue	94.P4 Blue
For relay type		55.33	55.32, 55.34
Accessories			
Metal retaining clip			094.71
Plastic retaining and release clip (supplied with socket - packaging code SPA)			094.91.3
6-way jumper link			094.56
Identification tag			094.00.4
2-way jumper link			094.52.1
2-way jumper link			097.52
Marker tag holder			097.00
Timer modules (see table below)			86.30
Sheet of marker tags for plastic retaining and release clip 094.91.3 and for marker tag holder 097.00, 48 tags, 6 x 12 mm for CEMBRE thermal transfer printers			060.48
Technical data			
Rated values		10 A - 250 V	
Dielectric strength		2 kV AC	
Protection category		IP 20	
Ambient temperature		°C -40...+70	
Wire strip length		mm 8	
Min. wire size for 94.P3 and 94.P4 sockets		solid wire	stranded wire
		mm ² 0.5	0.5
		AWG 21	21
Max. wire size for 94.P3 and 94.P4 sockets		solid wire	stranded wire
		mm ² 2 x 1.5 / 1 x 2.5	2 x 1.5 / 1 x 2.5
		AWG 2 x 18 / 1 x 14	2 x 18 / 1 x 14




6-way jumper link for 94.P3 and 94.P4 sockets	094.56 (blue)
Rated values	10 A - 250 V




2-way jumper link for 94.P3 and 94.P4 sockets	094.52.1
Rated values	10 A - 250 V



2-way jumper link for 94.P3 and 94.P4 sockets	097.52
Rated values	10 A - 250 V



Marker tag holder for 94.P3 and 94.P4 sockets	097.00
---	--------



86 series timer modules	
(12...24)V AC/DC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.0.024.0000
(110...125)V AC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.8.120.0000
(230...240)V AC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.8.240.0000

Approvals (according to type):



097.00



86.30



94.04

Approvals


(according to type):



cUL US Certain relay/socket combinations








094.91.3



060.48

Box clamp socket		94.02	94.02.0	94.03	94.03.0	94.04	94.04.0
panel or 35 mm (EN 60715) rail mount		Blue	Black	Blue	Black	Blue	Black
For relay type		55.32		55.33		55.32, 55.34	
Accessories							
Metal retaining clip		094.71					
Plastic retaining and release clip (supplied with socket - packaging code SPA)		094.91.3	094.91.30	094.91.3	094.91.30	094.91.3	094.91.30
6-way jumper link		094.06	094.06.0	094.06	094.06.0	094.06	094.06.0
Identification tag		094.00.4					
Marker tag holder		097.00					
Timer modules (see table below)		86.30					
Sheet of marker tags for plastic retaining and release clip 094.91.3 and for marker tag holder 097.00, 48 tags, 6 x 12 mm for CEMBRE thermal transfer printers		060.48					
Technical data							
Rated values		10 A - 250 V					
Dielectric strength		2 kV AC					
Protection category		IP 20					
Ambient temperature		°C -40...+70					
Screw torque		Nm	0.5				
Wire strip length		mm	8				
Max. wire size for 94.02/03/04 sockets		mm ²	solid wire		stranded wire		
			1 x 6 / 2 x 2.5		1 x 4 / 2 x 2.5		
		AWG	1 x 10 / 2 x 14		1 x 12 / 2 x 14		

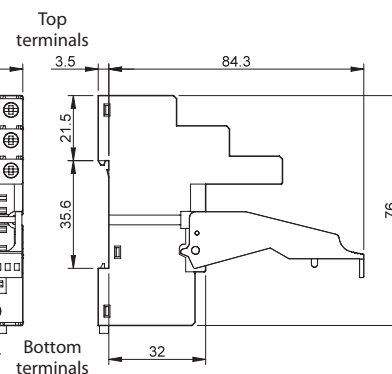

094.06

6-way jumper link for 94.02, 94.03 and 94.04 sockets		094.06 (blue)	094.06.0 (black)
Rated values		10 A - 250 V	




86.30

86 series timer modules	
(12...24)V AC/DC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.0.024.0000
(110...125)V AC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.8.120.0000
(230...240)V AC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.8.240.0000

Approvals (according to type):






95.P5

Approvals
(according to type):



095.91.3



060.48

Push-in terminals socket panel or 35 mm rail mount

For relay type

95.P3

40.31

95.P5

40.51/ 52/ 61/ 62

Accessories

Metal retaining clip

095.71

Plastic retaining and release clip
(supplied with socket - packaging code SPA)

095.91.3

8-way jumper link

097.58

2-way jumper link (12.5 mm pitch)

097.52

2-way jumper link (4.6 mm pitch)

097.42

Marker tag holder (for tags 060.48 type)

097.00

Timer modules (see table below)

86.30

Identification tag

095.00.4

Sheet of marker tags for plastic retaining and release clip
095.91.3 and for marker tag holder 097.00, 48 tags,
6 x 12 mm, for CEMBRE thermal transfert printer

060.48

Technical data

Rated values

10 A - 250 V*

Dielectric strength

6 kV (1.2/50 µs) between coil and contacts

Protection category

IP 20

Ambient temperature

°C -40...+70 (see diagram L95)

Wire strip length

mm 8

Min. wire size for 95.P3 and 95.P5 sockets

solid wire

stranded wire

mm² 0.5

0.5

AWG 21

21

Max. wire size for 95.P3 and 95.P5 sockets

solid wire

stranded wire

mm² 2 x 1.5 / 1 x 2.5

2 x 1.5 / 1 x 2.5



AWG 2 x 18 / 1 x 14

2 x 18 / 1 x 14


* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).

With the relay 40.51 the change-over contact will be 21-12-14.

L 95 - Total socket current v ambient temperature

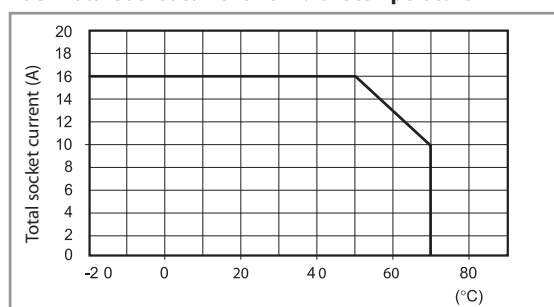

95.P3

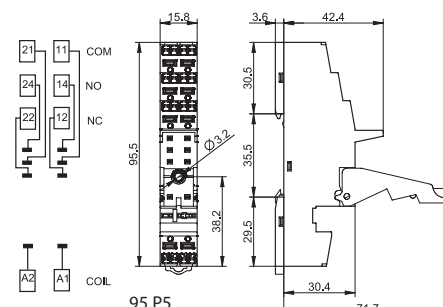

95.P5




097.58

8-way jumper link for 95.P3 and 95.P5 sockets

Rated values

097.58

10 A - 250 V




097.52

2-way jumper link for 95.P3 and 95.P5 sockets

Rated values

097.52

10 A - 250 V




097.42

2-way jumper link for 95.P3 and 95.P5 sockets

Rated values


097.42

10 A - 250 V



097.00

Marker tag holder for 95.P3 and 95.P5 sockets



097.00

86 series timer modules

(12...24)V AC/DC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.0.024.0000

(110...125)V AC; Bi-function: AI, DI; (0.05 s...100 h)


86.30.8.120.0000

(230...240)V AC; Bi-function: AI, DI; (0.05 s...100 h)

86.30.8.240.0000

Approvals (according to type):






95.05
Approvals
(according to type):



US Certain relay/socket combinations



095.01





060.48


Box clamp socket panel or 35 mm rail mount	95.03 Blue	95.03.0 Black	95.05 Blue	95.05.0 Black
For relay type	40.31		40.51, 40.52, 40.61, 40.62	
Accessories				
Metal retaining clip	095.71			
Plastic retaining and release clip (supplied with socket - packaging code SPA)	095.01	095.01.0	095.01	095.01.0
8-way jumper link	095.18	095.18.0	095.18	095.18.0
Marker tag holder (for tags 060.48 type)	097.00			
Identification tag	095.00.4			
Timer modules (see table below)	86.30			
Sheet of marker tags for plastic retaining and release clip 095.01 and for marker tag holder 097.00, 48 tags, 6 x 12 mm, for CEMBRE thermal transfer printers	060.48			
Technical data				
Rated values	10 A - 250 V*			
Dielectric strength	6 kV (1.2/50 μs) between coil and contacts			
Protection category	IP 20			
Ambient temperature	°C	−40...+70 (see diagram L95)		
 Screw torque	Nm	0.5		
Wire strip length	mm	8		
Max. wire size for 95.03 and 95.05 sockets		solid wire		stranded wire
	mm²	1 x 6 / 2 x 2.5		1 x 4 / 2 x 2.5
	AWG	1 x 10 / 2 x 14		1 x 12 / 2 x 14

* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).


L 95 - Total socket current v ambient temperature

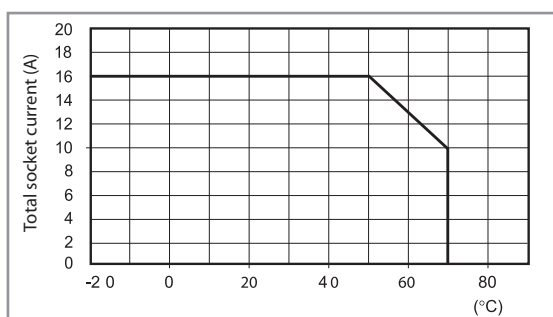

95.03

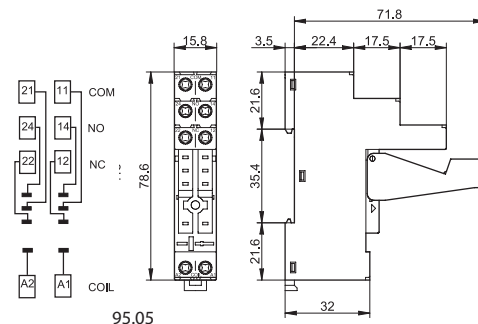


95.05



095.18

8-way jumper link for 95.03 and 95.05 sockets	095.18 (blue)	095.18.0 (black)
Rated values	10 A - 250 V	



86 series timer modules	
(12...24)V AC/DC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.0.024.0000
(110...125)V AC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.8.120.0000
(230...240)V AC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.8.240.0000


Approvals (according to type):



86.30



96.02


Approvals
(according to type):


96.04


Approvals
(according to type):


094.91.3


Box clamp socket	96.02	96.02.0	96.04	96.04.0
panel or 35 mm rail (EN 60715) mount	Blue	Black	Blue	Black
For relay type	56.32		56.34	
Accessories				
Metal retaining clip (supplied with socket - packaging code SMA)	094.71		096.71	
Plastic retaining and release clip (supplied with socket - packaging code SPA)	094.91.3	094.91.30	—	—
6-way jumper link	094.06	094.06.0	—	—
Identification tag	095.00.4		090.00.2	
Timer modules	86.30		86.00, 86.30	
Technical data				
Rated values	12 A - 250 V			
Dielectric strength	2 kV AC			
Protection category	IP 20			
Ambient temperature	°C -40...+70			
Screw torque	Nm	0.8		
Wire strip length	mm	8		
Max. wire size for 96.02/04 sockets	solid wire		stranded wire	
	mm ² 1 x 6 / 2 x 2.5		1 x 4 / 2 x 2.5	
	AWG 1 x 10 / 2 x 14		1 x 12 / 2 x 14	



96.02




96.04

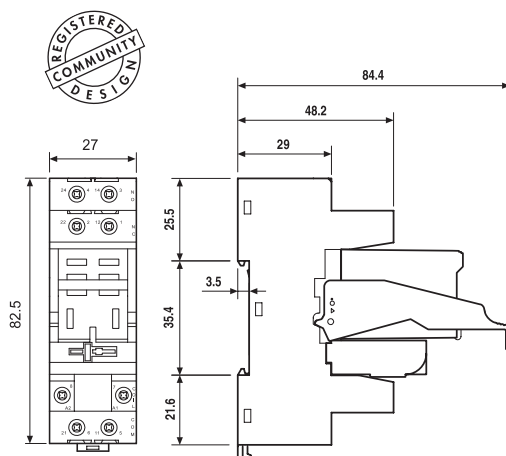

96.02

96.02 + 56.32 + 094.91.3 + 86.30

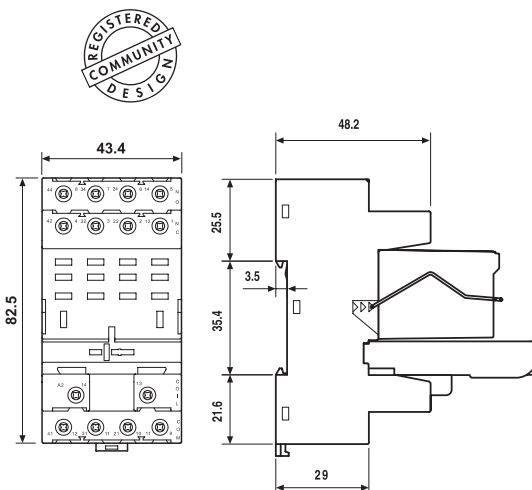


96.04

96.04 + 56.34 + 096.71 + 86.00

6-way jumper link for 96.02 socket	094.06 (blue)	094.06.0 (black)
Rated values	10 A - 250 V	



094.06

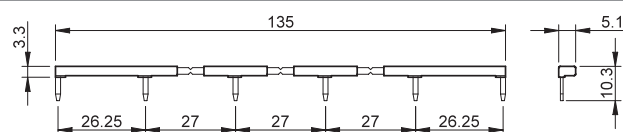




97.P2

Approvals
(according to type):





097.01




060.48

Push-in terminal socket panel or 35 mm rail (EN 60715) mount	97.P1	97.P2
For relay type	46.61	46.52
Accessories		
Plastic retaining and release clip (supplied with socket - packaging code SPA)		097.01
Metal retaining clip		097.71
Identification tag		095.00.4
8-way jumper link		097.58
2-way jumper link		097.52
2-way jumper link		097.42
Marker tag holder		097.00
Timer modules (see table below)		86.30
Sheet of marker tags for marker tag holder 097.00, 48 tags, 6 x 12 mm, for CEMBRE thermal transfer printers		060.48
Technical data		
Rated values	16 A-250 V AC	8 A-250 V AC
Dielectric strength	6 kV (1.2/50 µs) between coil and contacts	
Protection category	IP 20	
Ambient temperature	°C –40...+70 (see diagram L97)	
Wire strip length	mm 8	
Min. wire size for 97.P1 and 97.P2 socket	solid wire	stranded wire
	mm² 0.5	0.5
	AWG 21	21
Max. wire size for 97.P1 and 97.P2 socket	solid wire	stranded wire
	mm² 2 x 1.5 / 1 x 2.5	2 x 1.5 / 1 x 2.5
	AWG 2 x 18 / 1 x 14	2 x 18 / 1 x 14


L 97 - Rated current v ambient temperature

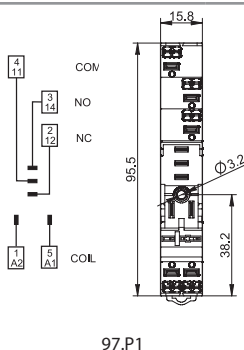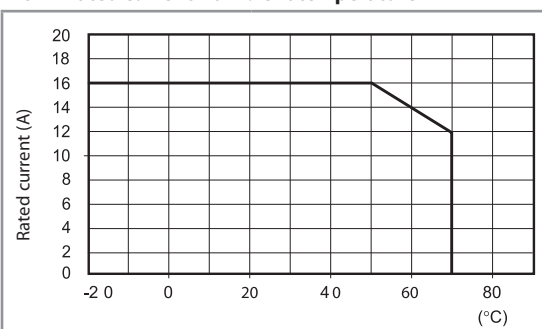

97.P1

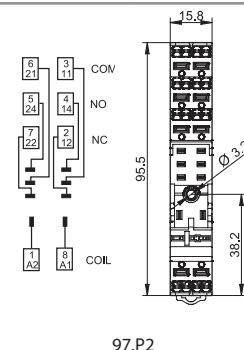

97.P2

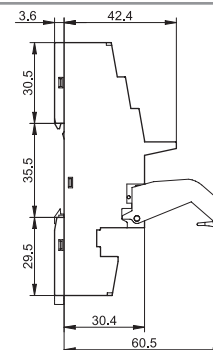

097.58



097.52






097.42



097.00




86.30

8-way jumper link for 97.P1 and 97.P2 sockets Rated values	097.58 10 A - 250 V
	
2-way jumper link for 97.P1 and 97.P2 sockets Rated values	097.52 10 A - 250 V
	
2-way jumper link for 97.P1 and 97.P2 sockets Rated values	097.42 10 A - 250 V
	
Marker tag holder for 95.P3 and 95.P5 sockets Rated values	097.00 10 A - 250 V
	

86 series timer modules	
(12...24)V AC/DC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.0.024.0000
(110...125)V AC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.8.120.0000
(230...240)V AC; Bi-function: AI, DI; (0.05 s...100 h)	86.30.8.240.0000

Approvals (according to type):    



97.01

Approvals



(according to type):




097.01

Box clamp socket	97.01	97.02
panel or 35 mm rail (EN 60715) mount	Blue	Blue
For relay type	46.61	46.52
Accessories		
Plastic retain and eject clip (supplied with socket - packaging code SPA)	097.01	
8-way jumper link	095.18 (blue)	095.18.0 (black)
Identification tag	095.00.4	
Timer modules	86.30	
Technical data		
Rated current	16 A - 250 V AC	8 A - 250 V AC
Dielectric strength	6 kV (1.2/50 µs) between coil and contacts	
Protection category	IP 20	
Ambient temperature	°C -40...+70 (see diagram L97)	
 Screw torque	Nm 0.8	
Wire strip length	mm 8	
Max. wire size for 97.01 and 97.02 sockets	solid wire	stranded wire
	mm ² 1 x 6 / 2 x 2.5	1 x 4 / 2 x 2.5
	AWG 1 x 10 / 2 x 14	1 x 12 / 2 x 14

L 97 - Rated current v ambient temperature
(for 46.61 relay / 97.01 socket combination)

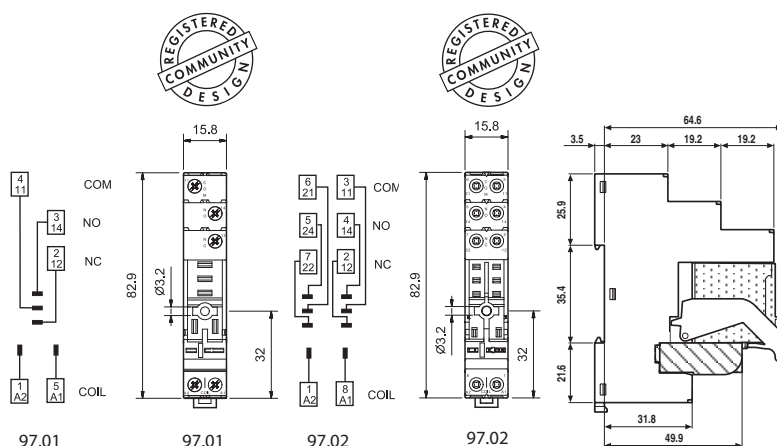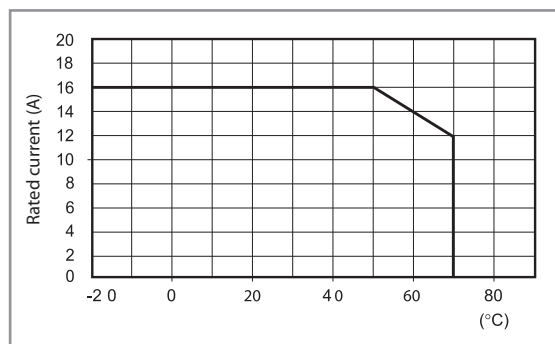

97.02 + 46.52 + 097.01
+ 86.30



095.18



8-way jumper link for 97.01 and 97.02 sockets	095.18 (blue)	095.18.0 (black)
Rated values	10 A - 250 V	

