

Specifications

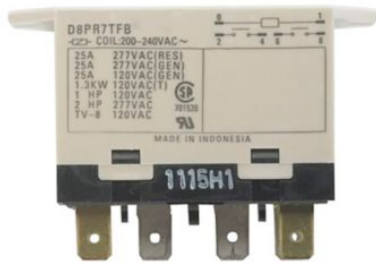


Photo is representative

Eaton D8PR7TFT1

D8 General Purpose Plug-In Relay, Flange mount, QTY: 1, 24 Vdc coil, 303 Ohms resistance, DPST-NO contact configuration, Silver alloy contacts, 25A, 220V rated load, 25A amperage rating, 250V max. operating voltage

General specifications

PRODUCT NAME	Eaton General-purpose relay
CATALOG NUMBER	D8PR7TFT1
UPC	782114161258
PRODUCT LENGTH/DEPTH	2.7 in
PRODUCT HEIGHT	1.85 in
PRODUCT WIDTH	1.32 in
PRODUCT WEIGHT	0.1 lb
WARRANTY	Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.
COMPLIANCES	CE Marked
CERTIFICATIONS	UL Listed file E1491 CSA file No. LR701520 cRUus
CATALOG NOTES	Consult sales office or customer support center for additional coil voltages
PRODUCT TYPE	General-purpose relay

Product specifications

TYPE	General-purpose relay
AMPERAGE RATING	25A
MOUNTING	Flange
PROD LOAD	25A, 220V
COIL VOLTAGE	24 Vdc
CONTACT CONFIGURATION	DPST: NO
CONTACT MATERIAL	Silver alloy
QUANTITY	1
RESISTANCE	303 Ω
SERIES	D8
VOLTAGE - MAX	250 V

Resources

SPECIFICATIONS AND DATASHEETS

[Eaton Specification Sheet - D8PR7TFT1](#)

WARRANTY GUIDES

[Selling Policy 25-000 - Distribution and Control Products and Services](#)

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2026 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

