



**PAV69278PO /
PAV6927PI**

LTE Vertical Low PIM Directional Panel Antenna 698-960 MHz/1710-2700MHz

The PAV69278PO/PAV69278PI are low PIM, multiband, high gain directional panel antennas with vertical polarization that covers the 698-960 MHz/1710-2700 MHz, LTE700/Cellular/PCS/AWS/MDS and global GSM900/GSM1800/UMTS/LTE2600 bands. The radiation patterns are uniform and symmetrical, providing high-level signal density into defined coverage zones. These antennas greatly enhance the performance of LP TE systems and are ideal for outdoor/indoor applications. They include all mounting brackets, anchors, and bolts. The antennas can also be mast mounted with bracket adapter and clamps.

FEATURES AND BENEFITS

- Performance optimized using TE proprietary RF optimization tools
- Low PIM performance minimizes interference and improves in-building wireless network coverage and capacity
- Mounted with standard bracket or mast-mounted with bracket adapter and clamps
- Multiple connector and coax options available
- The PAV69278PO is IP67-rated for dust, dirt, and water ingress

APPLICATIONS

- FirstNet/Public Safety
- In-building or outdoor wireless networks
- Wireless terminal, point-of-sale, and machine-to-machine
- Automatic meter reading
- Commercial and industrial security
- iDAS
- Libraries
- Retail malls
- Bus terminals and train stations
- Other In-building areas

ELECTRICAL SPECIFICATIONS

Operating Frequency (MHz)	698-806	824-894	880-960	1710-1880	1850-1990	1910-2170	2300-2500	2500-2700
VSWR – Avg	<1.8:1	<1.7:1	<1.7:1	<1.8:1	<1.7:1	<1.9:1	<1.7:1	<1.5:1
VSWR – Max	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1
Peak Gain – Typ (dBi)	7.0	7.6	7.6	8.3	8.7	8.2	8.4	7.1
Peak Gain – Max (dBi)	7.6	7.8	7.8	8.8	8.8	8.8	8.7	7.8
PIM - 2x20W – Typ (dBc)	< -150			< -153				
PIM - 2x20W – Max (dBc)	< -150			< -150				
Nominal Impedance (Ohms)	50							
Max Power - Ambient 25°C (W)	50							
Polarization	Vertical							

ELECTRICAL SPECIFICATIONS

Azimuth 3 dB Beamwidth	75°/63°
Elevation 3 dB Beamwidth	64°/51°
Front-to-Back Ratio (dB)	10/25

MECHANICAL SPECIFICATIONS

Dimensions - mm (in.)	249.4 x 248.5 x 61.3 (9.82 x 9.8 x 2.41)
Weight with Mounting Kit - kg (lbs.)	0.62 (1.35)
Antenna Color	White
Radome Material (PAV69278PO/PAV69278PI)	Luran ASA/Toyolac ABS, UV Stable, UL 94-HB Material

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature - C° (F°)	-40 to +70 (-40 to +158)
Storage Temperature - C° (F°)	-40 to +85 (-40 to +185)
Wind Operational - km/h (100 mph)	160 (100)
Wind Survival - km/h (100 mph)	220 (136)
Ingression Protection (PAV69278PO)	IP67
Material Substance Compliance	RoHS

CONFIGURATIONS


PART NUMBER	CABLE LENGTH	CONNECTOR
PAV69278PO-30NF	30 cm (12 in.)	Type N-female
PAV69278PO-30D43F	30 cm (12 in.)	4.3-10 DIN female
PAV69278PO-FNF	N/A	Fixed N-female
PAV69278PI-FNF	N/A	Type N-female
PAV69278PI-30NF	30 cm (12 in.)	Type N-female
PAV69278PI-30D41F	30 cm (12 in.)	4.1-9.5 female
PAV69278PI-30D43F	30 cm (12 in.)	4.3-10 female

MOUNTING

For Wall Mounting

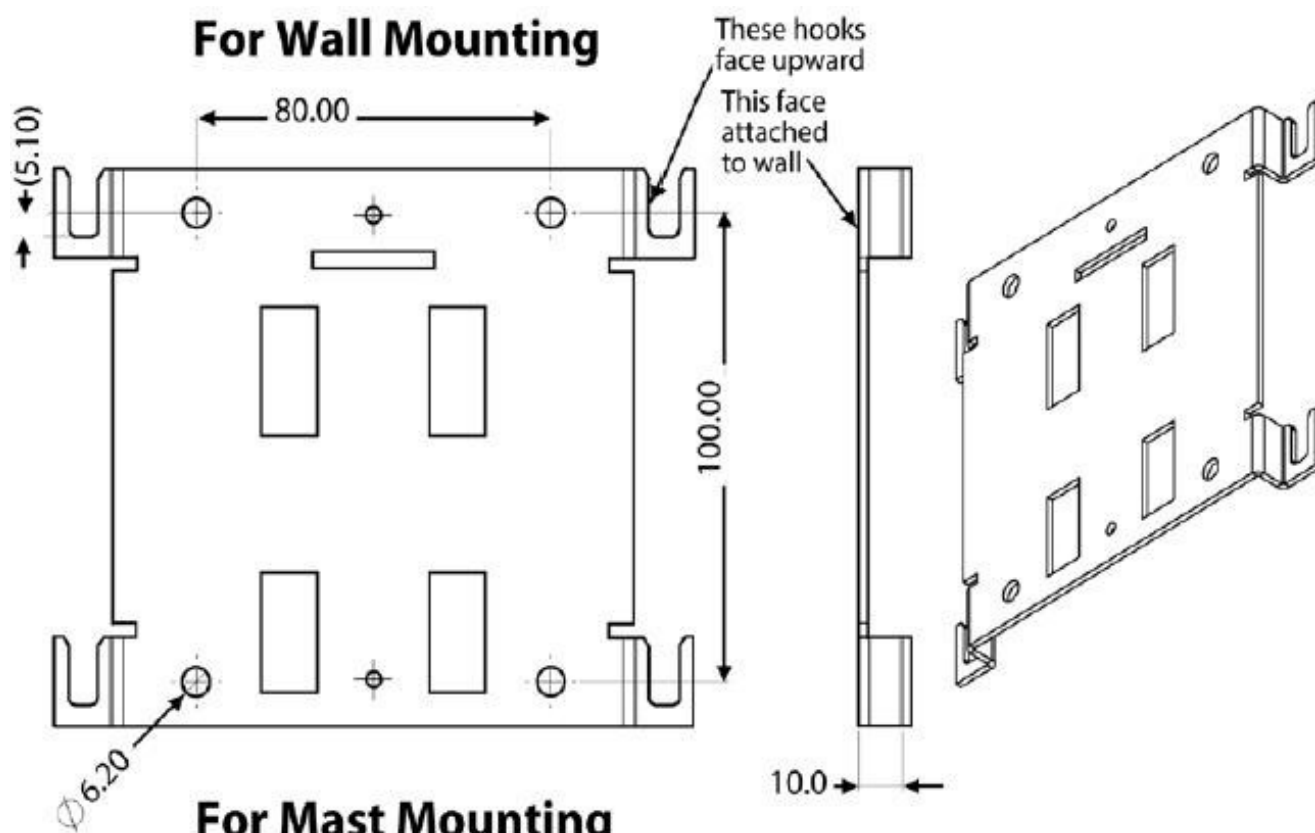


For Mast Mounting

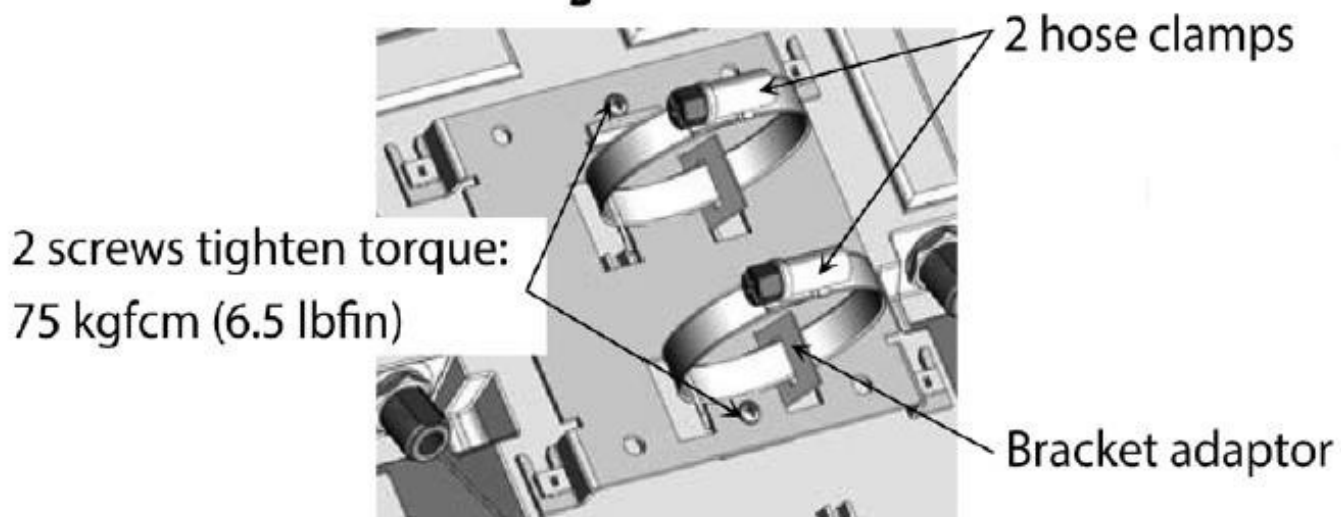


CONFIGURATIONS


Radiation Pattern at 698 MHz

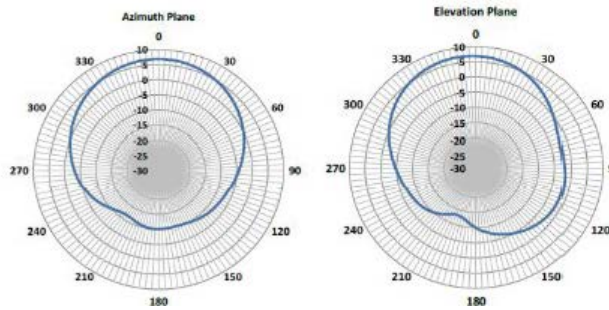


Radiation Pattern at 824 MHz

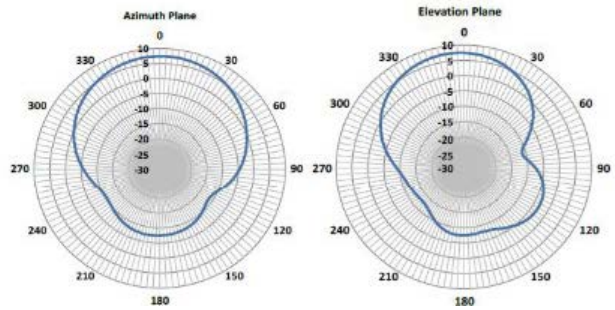

Radiation Pattern at 960 MHz

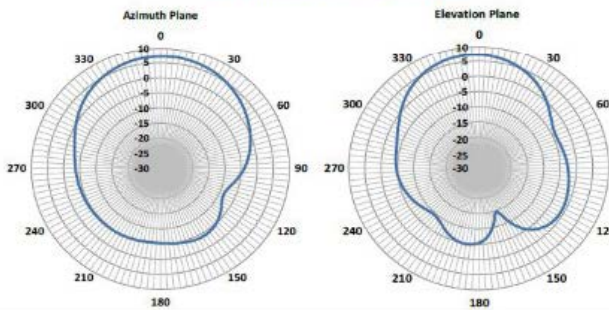


Radiation Pattern at 1710 MHz

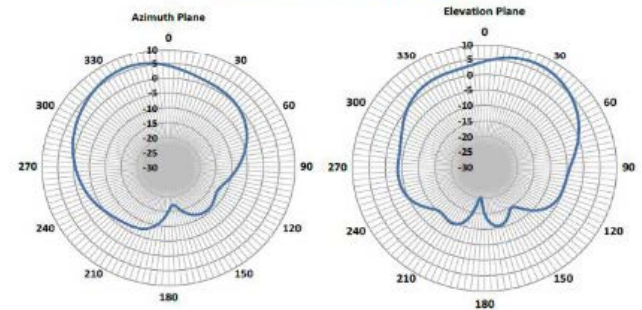


— S1 fixed
— S5 pigtail


Radiation Pattern at 1880 MHz

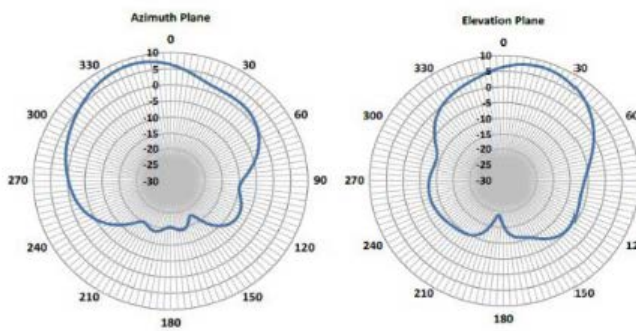


Radiation Pattern at 2110 MHz

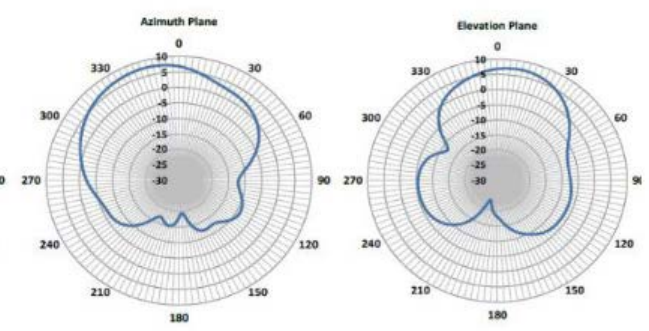


Radiation Pattern at 2305 MHz

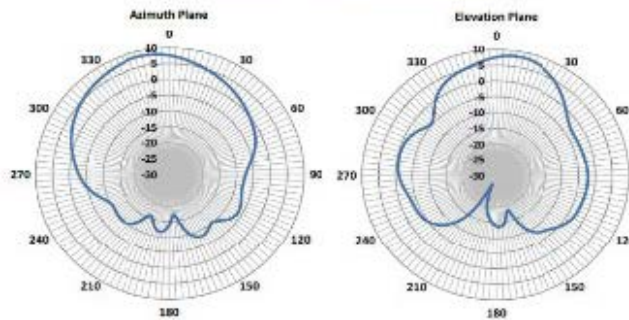

Radiation Pattern at 2412 MHz

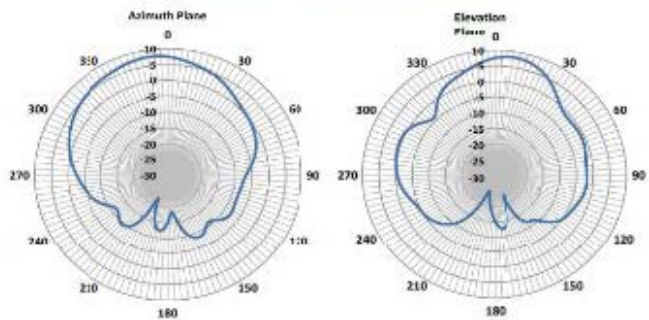

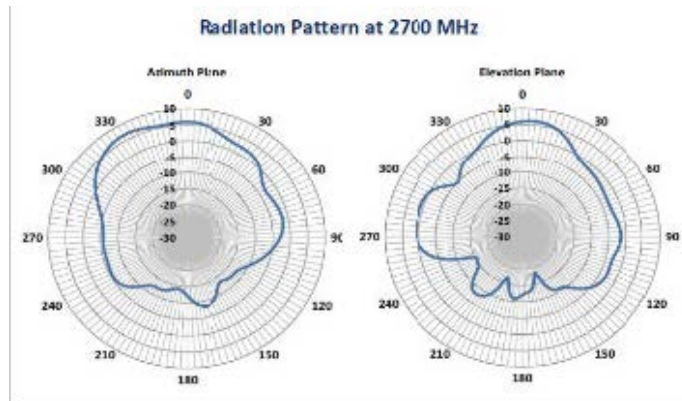

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original