


SE868K7-A

GPS Embedded

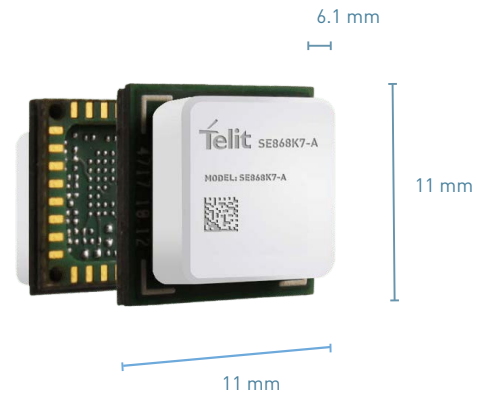

Product Description

The Jupiter SE868K7-A series is a new, enhanced variant of the Telit SE868-AS GPS antenna module. These modules are designed as companion GPS variant of the multi constellation SE868K3-A series and include 9 x 9 mm patch antenna, SAW filter, ROM memory, GPS core, RTC and TCXO. The SE868K7-A series uses the same compact 11 x 11 mm "cavity like" PCB package as the SE868-AS and retains its popular footprint while adding 2nd LNA to increase the RF sensitivity.

Telit's commitment to excellence is reflected in the architecture of the SE868K7-A series. Competing solutions require a guard in the host PCB around the RF PIN zone in order to minimize interference and antenna detuning. The Telit SE868K7-A series provides an integrated solution with an optimized RF path and standard SMT mounting operation, without constraining the host PCB, thus minimizing the antenna detuning.

The SE868K7-A series support GPS and QZSS as well as SBAS augmentation system. The SE868K7-A series provides the positioning data through standard UART.

The Jupiter SE868K7-A series supports either autonomous than server based A-GPS. Its onboard A-GPS software engine is able to locally predict ephemeris up to three days in advance and store this data in the RAM memory.

The Jupiter SE868K7-A series is the best single constellation solution for small tracking applications with challenging footprint requirement.

Key Benefits

- standard variant with integrated 9 x 9 x 4mm SMT antenna
- low profile variant with 9 x 9 x 2mm antenna
- Additional LNA and SAW filter
- SMT mounting not requiring holes on host PCB
- Backward compatible with SE868-AS
- Pin-to-pin compatible with GNSS variant SE868K3-A / AL and SE868-A
- Supports ephemeris file injection (A-GPS)
- Satellite Based Augmentation System (SBAS) compliant

Family Concept

Our positioning product portfolio is the result of over twenty years of experience in GNSS applications. Telit has developed a range of products compatible with the well-known GPS constellation as well as its Russian counterpart GLONASS. Moreover, our portfolio is fully aligned with the upcoming service launch of Europe's Galileo constellation. Valuable features such as Dead Reckoning, Precision Timing, as well as speed and reliability assured by multi-constellation coverage, provide additional benefits for your application.

Your application development effort can also benefit significantly from the seamless integration between Telit's 2G cellular and positioning modules. This bundling of cellular and positioning modules significantly reduces development complexity without adding costs. Multi-constellation positioning products applied together with our eCall/ERA-GLONASS compliant cellular modules bring you ready-to-use emergency automotive tracking solutions for the European and Russian markets.

Typical applications include fleet management systems, European GPS-assisted road tolling systems, cellular base stations, in-car navigation systems, automotive telematics systems, and GPS-based personal sports training monitors.

**Complete,
Ready-to-Use Access
to the Internet of Things**



SE868K7-A

Model	Constellations				Interfaces		Features					
	GPS/QZSS	GLONASS	Galileo	BDS	UART	I2C	Add. LNA	SAW	Track. Sensitivity	Acq. Sensitivity	Flash	Size
SE868K3-A	•	•	•		•	•	•	•	-164	-148	•	11 x 11 x 6.1
SE868K3-AL	•	•	•		•	•	•	•	-160	-145	•	11 x 11 x 4.1
SE868K7-A	•				•		•	•	-164	-148		11 x 11 x 6.1

Product Features

- 32-pad QFN package with embedded SMT antenna
- Embedded 9 x 9 mm SMT antenna
- Frequency Bands: GPS L1, QZSS L1,
- Standards: NMEA
- Jamming rejection
- Additional LNA + SAW filter
- A-GPS: ephemeris file injection
- EGNOS, WAAS, GAGAN and MSAS capability embedded with correction of positional errors due to ionospheric and orbital disturbances

Environmental

- Dimensions: 11 x 11 x 6.1 mm (SE868K7-A)
- Weight: <2 g
- Temperature range:
 - Operating temperature: -40 to +85°C
 - Storage temperature: -40 to +85°C

Interfaces

- 2x UART
- PPS for precise timing

Approvals

- RoHS compliant
- R&TTE

Electrical & Sensitivity

- Current consumption
 - Backup : < 30 uW
 - Full power tracking: < 70 mW (G+G)
 - Full power acquisition: < 80 mW (G+G)
- Sensitivity (SE868K7-A)
 - Acquisition: -148 dBm
 - Navigation: -161 dBm
 - Tracking: -164 dBm
- Sensitivity (SE868K7-AL)
 - Acquisition: -146 dBm
 - Navigation: -159 dBm
 - Tracking: -160 dBm
- Power supply
 - Range from 3 up to 4.3 V
- Positional accuracy (CEP50):
 - Autonomous Positional Error = 2.5m
- Accuracy
 - Speed: < 0.01 m/s
 - Heading: < 0.01 deg
- Time to first fix (90% @ -130 dBm)
 - Hot start: 1 s
 - Cold start: < 35 s

QUESTIONS? VISIT WWW.TELIT.COM/CONTACT-US

www.telit.com/facebook | www.telit.com/linkedin | www.telit.com/