

GPIO Cable with 6-pin Hirose HR10 Circular Connector


Industrial Machine Vision Accessories | ACC-01-3009 / ACC-01-3010

FEATURES

- 6-pins
- Hirose HR10 Circular connector (HR10A-7P-6S)
- 1 meter (ACC-01-3009) or 4.5 meters (ACC-01-3010)
- Cable Diameter 5.0 mm
- For use with:
 - Blackfly GigE
 - Blackfly S GigE
 - Blackfly USB3
 - Blackfly S USB3
 - Forge




Product appearance and specifications are subject to change without notice

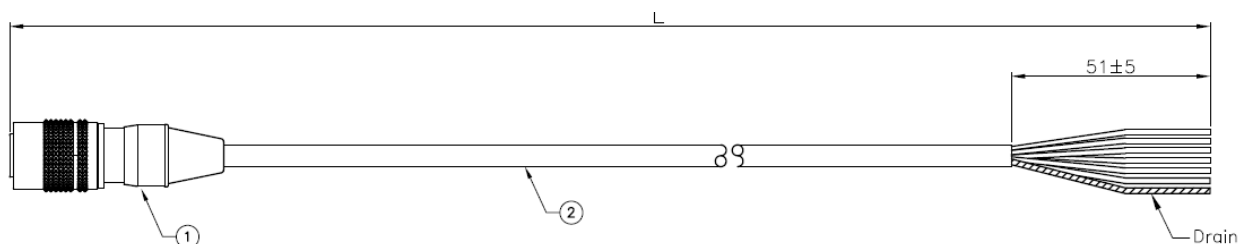

L = 1 meter or 4.5 meters

1 = Hirose 6 pin circular connector solder type

2 = UL20276 24AWG*6C+FAE 7/0.20 OD: 5.0 mm PVC Jacket, black

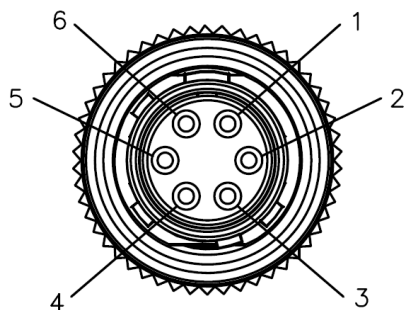

Pin	Color	Blackfly S / Forge	Blackfly
1	Green	Camera Power Input	Camera Power Input
		Non-isolated Input	
2	Black	Opto-isolated Input	
3	Red	Camera Power Output	Camera Power Output
		Non-isolated Input/Output	
4	White	Opto-isolated Output	
5	Blue	Opto-isolated Ground	
6	Brown	Camera Power Ground	
Shell	Drain		

FOR MORE INFORMATION CONTACT:

THE AMERICAS
T: +1 866.765.0827 (toll free)
T: +1 604.242.9937
E: mv-sales@teledyne.com

EUROPE, MIDDLE EAST, AFRICA
T: +49 7141 488817-0
F: +49 7141 488817-99
E: mv-eusales@teledyne.com

CHINA BEIJING OFFICE
T: +86-10-84669678 ex. 8019

SHANGHAI OFFICE
T: +86-21-32501002 ex. 801
E: mv-chinasales@teledyne.com
E: mv-taiwansales@teledyne.com

JAPAN AND ASIA PACIFIC
T: +81-3-5422-7866
E: mv-japansales@teledyne.com

This document does not contain information whose export/transfer/disclosure is restricted by the Canadian Export Control regulation. Teledyne FLIR reserves the right to make changes at any time without notice.
© 2024 Teledyne FLIR