


# Actuator

51-  
384.F22DF

Distribution by  
DigiKey

**DigiKey**

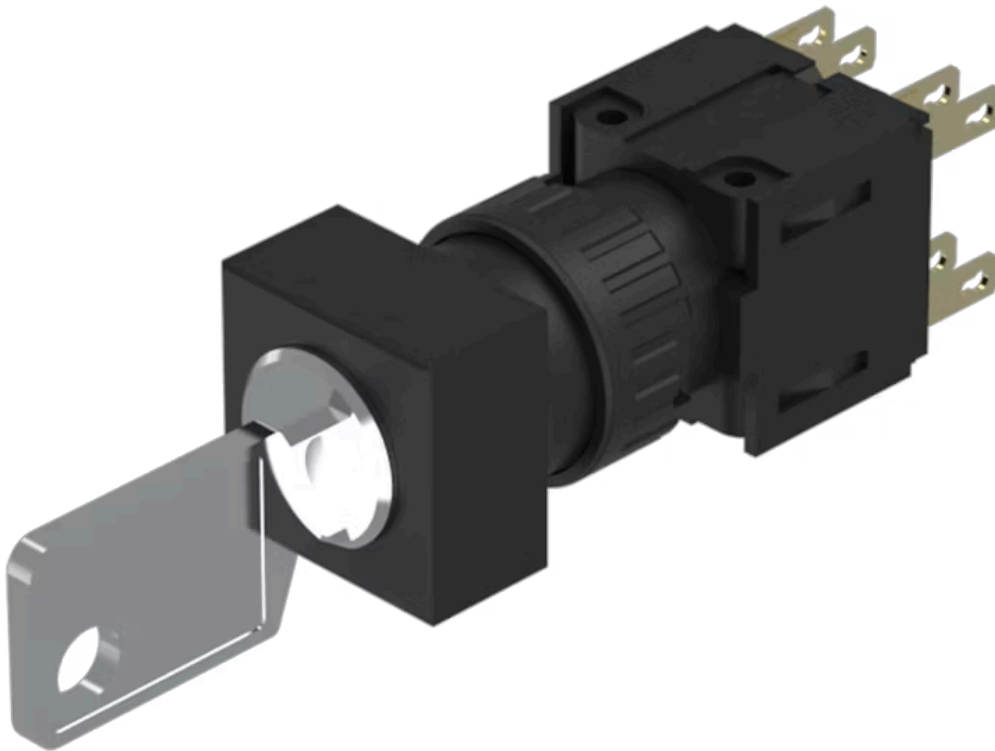

<https://digikey.eao.com/component/51-384.F22D...>

Your product:

---



## 51-384.F22DF Actuator

*Loading . . .*

### FRONT

**Front dimension:** 18 mm x 18 mm

**Front form:** Square

### MOUNTING

**Design:** Flush

**Mounting cut-out:** 21 mm x 21 mm

**Mounting type:** Panel mounting

### ELECTRICAL CHARACTERISTICS

**Switching voltage and switching current:** 250 VAC, 5 A ( $\cos\phi$  0.75)

**Contacts:** 2 NC / 2 NO

**Switching rating:** 250 V @ 5 A

**Electric strength:** 2500 VAC, 50 Hz, 1 min. between all terminals and earth, according to IEC 61058-1, part 15

**Electrostatic discharge (ESD):**  $\leq 15$  KV

**Protection class:** II

**Thermal current I<sub>th</sub>:** 5 A, according to EN / IEC 60947-5-1

### MECHANICAL CHARACTERISTICS

**Terminal:** Plug-in terminal, 2.8 x 0.5 mm

**Contact material:** Gold

**Switching action:** Momentary - Rest (a) - Momentary

**Switching system:** Snap-action switching element

|                             |                                                                                                                      |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------|
| <b>Switching system:</b>    | Self-cleaning, double-break snap action switching system, 1 normally closed and 1 normally open contact per element. |
| <b>Switching positions:</b> | 3 positions                                                                                                          |
| <b>Switching angle:</b>     | 42° left / 42° right                                                                                                 |
| <b>Mechanical lifetime:</b> | 50 000 cycles of operation                                                                                           |
| <b>Tightening torque:</b>   | Fixing nut max. 0.5 Nm                                                                                               |
| <b>Wire cross section:</b>  | Max. wire cross-section 2 wires with 1 mm<br>Max. wire cross-section of stranded cable 2 x 0.75 mm <sup>2</sup>      |
| <b>Weight:</b>              | 0.023 kg                                                                                                             |

## AMBIENT CONDITION


|                               |                                 |
|-------------------------------|---------------------------------|
| <b>IP front protection:</b>   | IP65, according to DIN EN 60529 |
| <b>Operating temperature:</b> | – 25 °C ... + 55 °C             |
| <b>Storage temperature:</b>   | – 40 °C ... + 85 °C             |

## CERTIFICATE


|                      |                                                                             |
|----------------------|-----------------------------------------------------------------------------|
| <b>Approbations:</b> | CB (IEC 61058-1), CQC, CSA, DNV, ENEC (EN 61058-1), UL                      |
| <b>Conformities:</b> | CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 30 / EU (EMC), 2014 / 35 / EU (LVD) |
| <b>REACH:</b>        | REACH compliant                                                             |
| <b>RoHS:</b>         | RoHS compliant                                                              |

## OTHER


|                                           |                                                                                                                                                                |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Short Description:</b>                 | Actuator, 21 mm x 21 mm, 18 mm x 18 mm, Square, 2 NC / 2 NO, Momentary - Rest (a) - Momentary, Plug-in terminal, 2.8 x 0.5 mm, IP65, according to DIN EN 60529 |
| <b>Housing colour:</b>                    | Black                                                                                                                                                          |
| <b>Hints:</b>                             | Standard lock: DOM 311                                                                                                                                         |
| <b>max. number of switching elements:</b> | 1                                                                                                                                                              |
| <b>Switching positions:</b>               |                                                                                                                                                                |

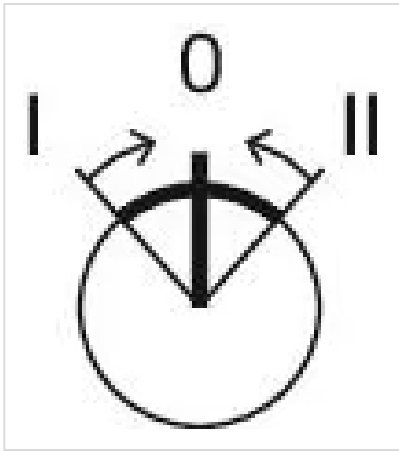

#### Wiring diagrams:

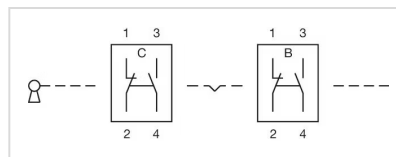

#### Mounting cut-outs:

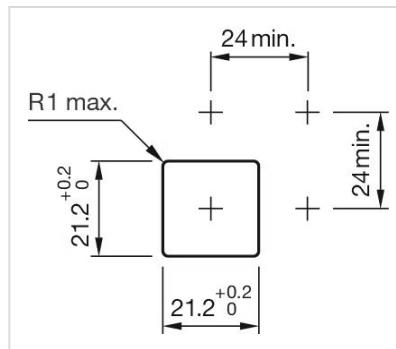

#### Dimension drawings:

