

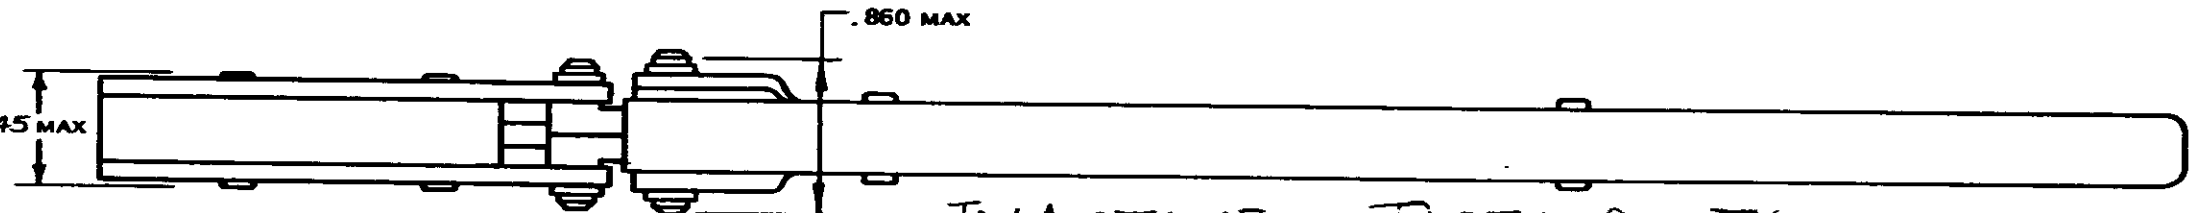
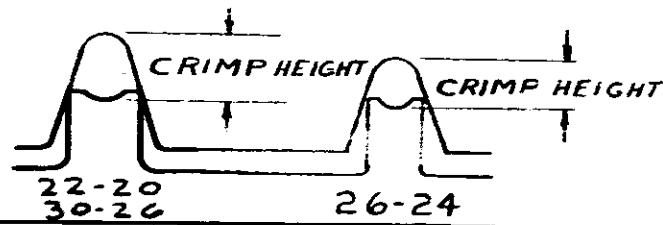


INACTIVE 11/8/77


PINS AND SNAP RINGS.
SEE NOTE 2

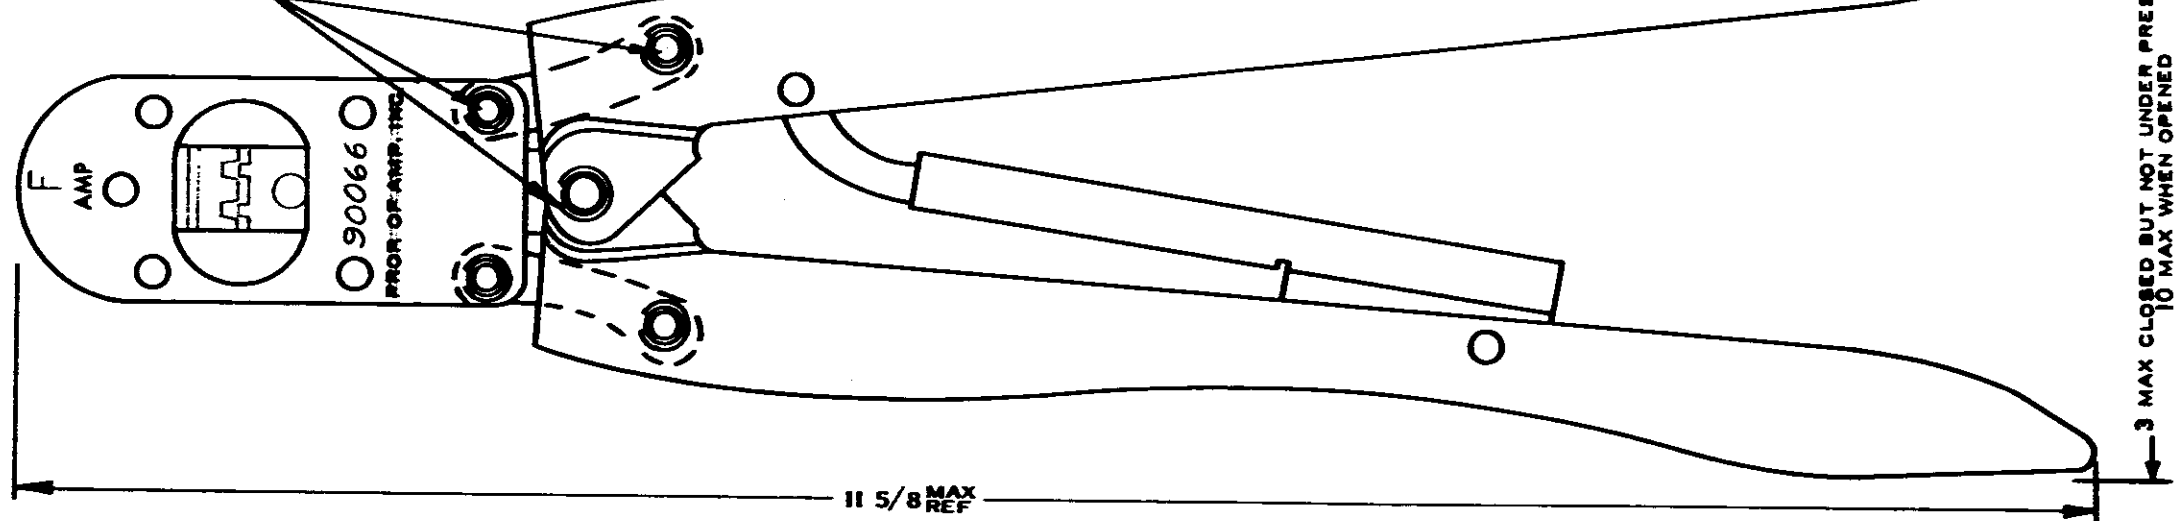


INACTIVE, REFER TO
IS SHEET 7070 11/8/77

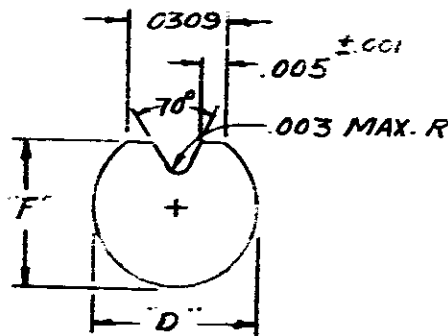


WIRE CRIMP
26-24

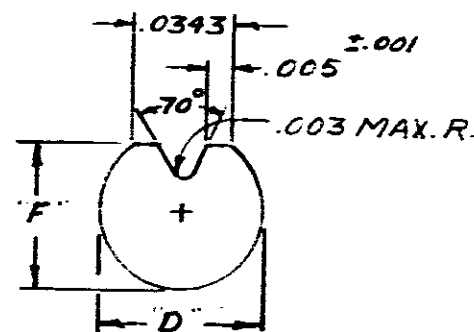


WIRE CRIMP
22-20 & 30-26



BOTH INSULATION CRIMPS



SIDE VIEW
OF GAGE

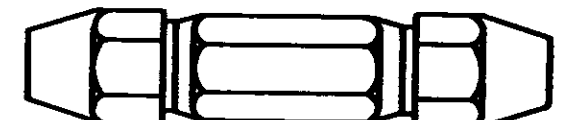

DOUBLE END HANDLE A.G.D. STD.

ENLARGED END VIEW OF GAGES

- 1 CRIMP GAGE DIMENSIONS APPLY WHEN TOOL IS CLOSED OR BOTTOMED BUT NOT UNDER PRESSURE.
- 2 FOR REPLACEMENT OF PARTS SUCH AS PINS AND SNAP RINGS. ORDER REPAIR KIT NO. 125218-3.
- 3 FOR REPLACEMENT OF PARTS OTHER THAN PINS AND SNAP RINGS. TOOL IS TO BE RETURNED TO AMP INC. HARRISBURG, PENNA. TO INSURE PROPER CERTI-CRIMP ADJUSTMENT.
- 4 FOR TOOL USAGE. SEE INSTRUCTION SHEET NO. 7070.
- 5 HAND TOOL CAN BE CHECKED BY MEASURING TERMINAL CRIMP HEIGHT.

REVISION RECORD				NUM.
LTR	REVISION RECORD	DR	CHK	
R	INACTIVE PER ELN HT-11/8/77	HT-11/8/77	8/6/77	90066
A	ADDED "30-26" TO 22-20 C. AREA	HT-11/8/77	8/6/77	
	I.S. 7070 WAS 7071 IN NOTE #4			

SUGGESTED GAGE DESIGN

INACTIVE

©1963 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		CUSTOMER COPY REFERENCE ONLY	
DR BjB-11 1-23-63	MATERIAL AND FINISH H	AMP INCORPORATED HARRISBURG, PENNA.	
CHK Kobler-11 1-23-63	WIRE - RANGE - INSULATION ++ ++	CLASS	
DE BjB-11 1-23-63	TOLERANCE EXCEPT AS NOTED H	TYPE	
APP 11/8/77	SCALE H	LOC	
NAME STRAIGHT ACTION HAND TOOL		NO R B C-90066	
		REV B	