




THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
(C) COPYRIGHT - By - ALL RIGHTS RESERVED.		


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A5	ECR-18-009229	25SEP2018	DHC	PO

Materials			
No	Component name	Base material	Plating
1	Housing	Diallyl phthalate resin	
2	End terminal	silver clad copper alloy	gold flash
3	Center terminal	copper alloy	gold flash
4	Rocker contact	silver clad copper alloy	gold flash
5	Actuator tip	Phenol resin, UL94 HB	
6	Actuator spring	music wire	
7	Actuator	Phenol resin, UL94 HB	
8	Actuator guide	polyamid resin	
9	Frame	cold rolled steel	zinc
10	Retainer	brass	none
11	Plunger spring	music wire	
12	Plunger pin	brass	
13	Bushing	zinc	nickel
14	Plunger	brass	nickel
15	Mounting nuts (2)	brass	nickel
16	Locating ring	cold rolled steel	nickel
17	Internal tooth lockwasher	steel	nickel

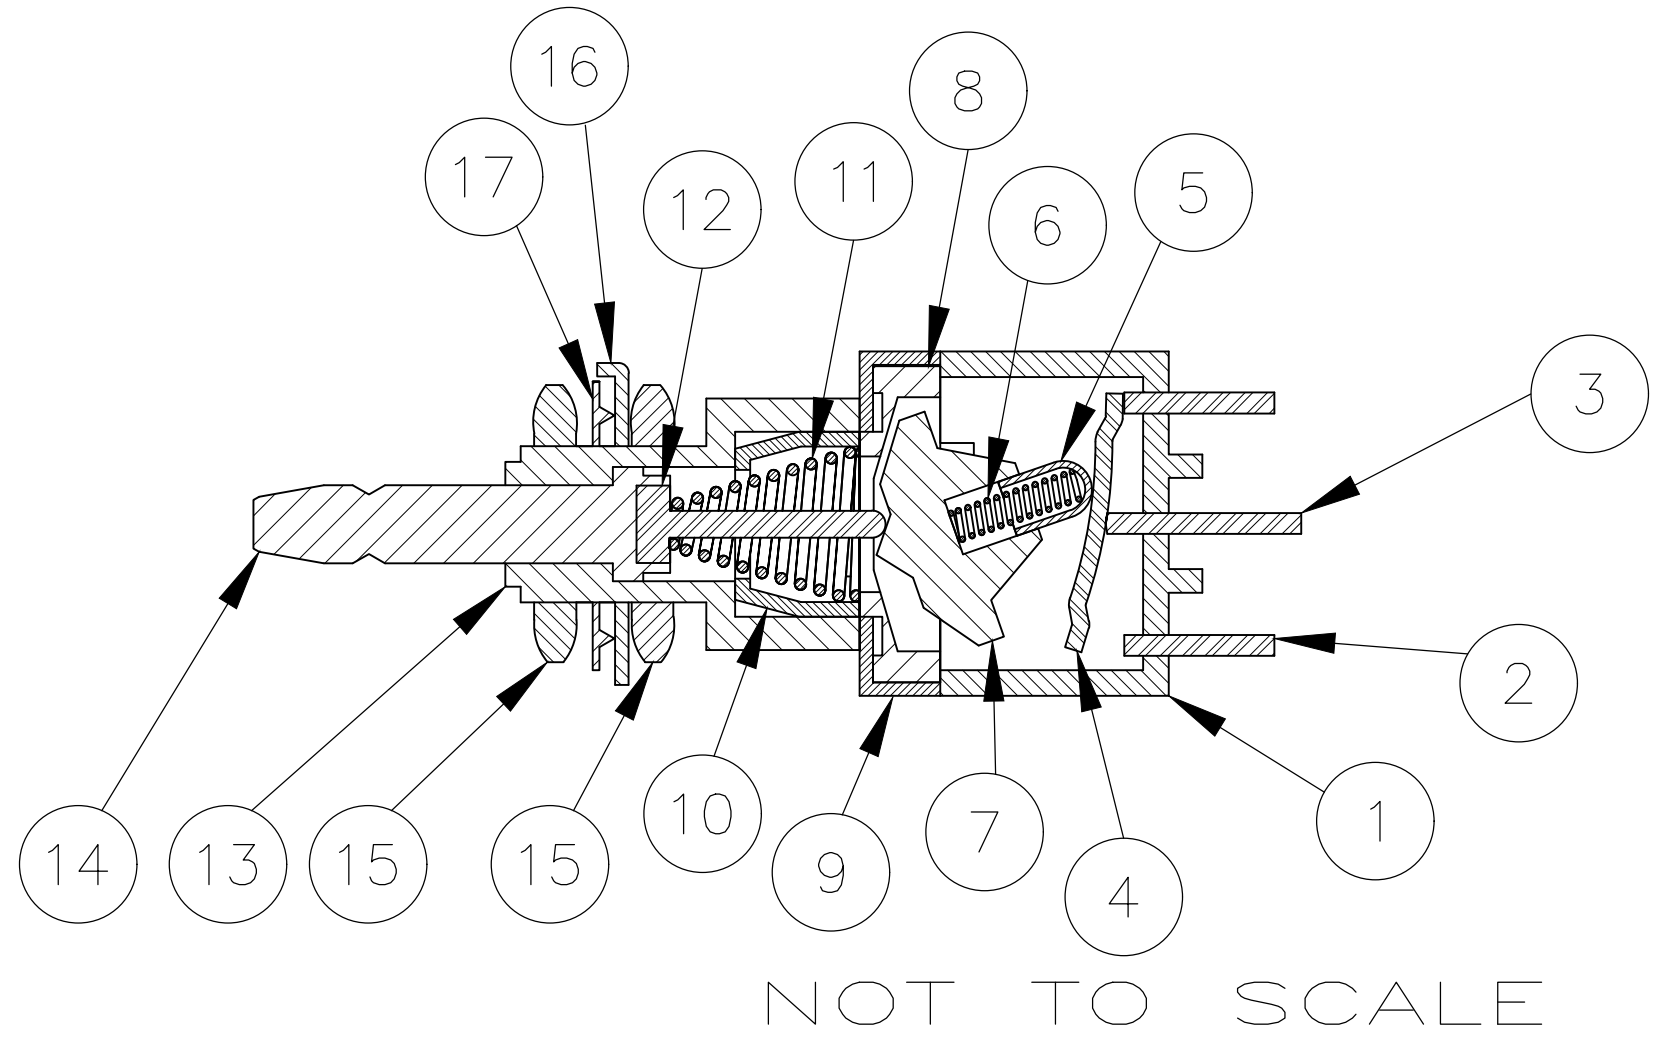

Specifications-see note 3			
Current rating UL & CSA	6A @ 125 VAC (resistive)		
	3A @ 250 VAC (resistive)		
	4A @ 28 VDC (resistive)		
Initial contact resistance	10 milliohms max @ 2-4 VDC, 1A		
Insulation resistance	1,000 megohms min.		
Dielectric strength	1,500 VAC		
Travel	.140		
Actuation force	.4 to 2 kgf		
Operating temperature	-20C to +85C		
Storage temperature	-40C to +85C		
Contact timing	break before make		
Terminal seal	over molded		
Durability	Parameter	Push on/ Push off	Momentary
	250 VAC (3A resistive)	50,000	50,000
	125 VAC (6A resistive)	50,000	50,000
	28 VDC (4A resistive)	50,000	50,000

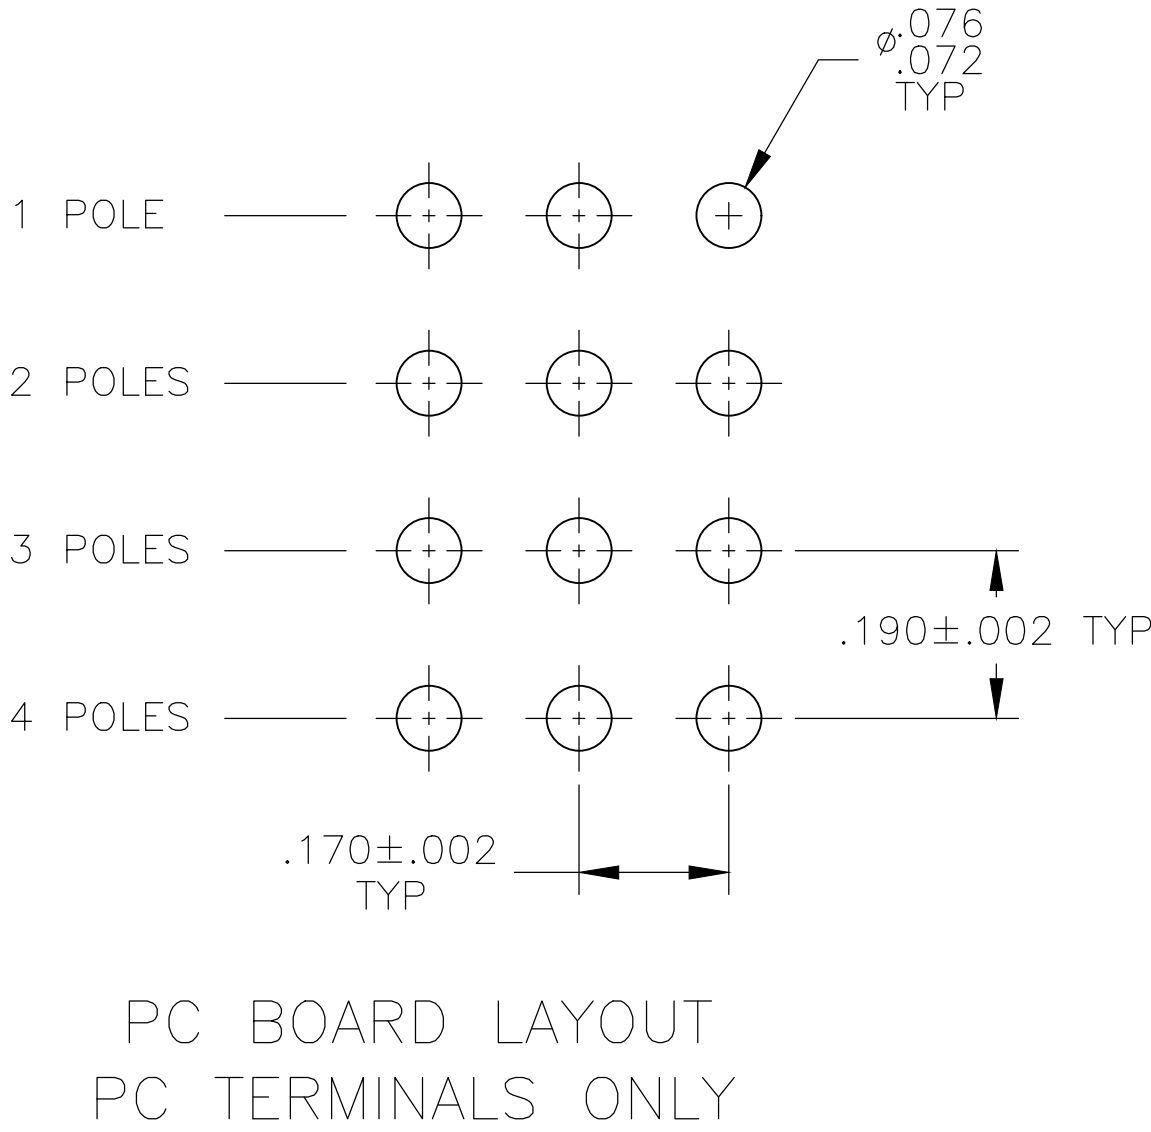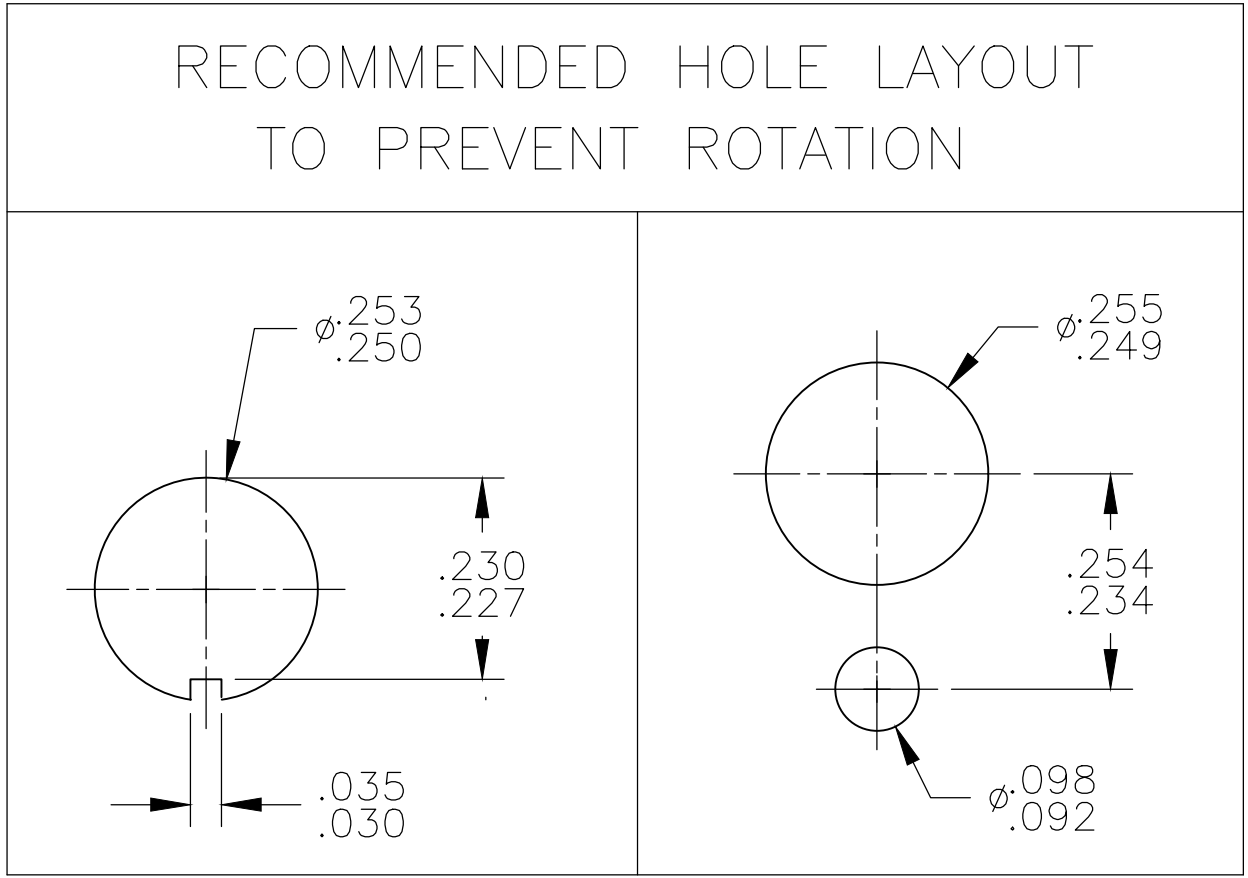

	PART NUMBER	Alco P/N	Mark Switch 	Poles	Throws	Terminal	Function		Connected Terminals	
									 3 2 1 6 5 4 9 8 7 12 11 10	 3 2 1 6 5 4 9 8 7 12 11 10
△10	3-1437567-8	MPA406R	MPA 406R	4	2	Wire lug	ON	MOM	2-1, 5-4, 8-7, 11-10	2-3, 5-6, 8-9, 11-12
	3-1437567-7	MPA406N	MPA 406N	4	2	Wire lug	ON	ON	2-1, 5-4, 8-7, 11-10	2-3, 5-6, 8-9, 11-12
	3-1437567-6	MPA306F	MPA 306F	3	2	Wire lug	ON	MOM	2-1, 5-4, 8-7	2-3, 5-6, 8-9
	3-1437567-5	MPA306D	MPA 306D	3	2	Wire lug	ON	ON	2-1, 5-4, 8-7	2-3, 5-6, 8-9
△10	3-1437567-4	MPA206RPC	MPA 206RPC	2	2	PC	ON	MOM	2-1, 5-4	2-3, 5-6
	3-1437567-3	MPA206R	MPA 206R	2	2	Wire lug	ON	MOM	2-1, 5-4	2-3, 5-6
	3-1437567-2	MPA206NPC	MPA 206NPC	2	2	PC	ON	ON	2-1, 5-4	2-3, 5-6
	3-1437567-1	MPA206N	MPA 206N	2	2	Wire lug	ON	ON	2-1, 5-4	2-3, 5-6
	3-1437567-0	MPA106FPC	MPA 106FPC	1	2	PC	ON	MOM	2-1	2-3
	2-1437567-9	MPA106F	MPA 106F	1	2	Wire lug	ON	MOM	2-1	2-3
△10	2-1437567-8	MPA106D	MPA 106D	1	2	Wire lug	ON	ON	2-1	2-3

NOTES:


1. TERMINAL NUMBERS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON THE SWITCHES.
2. EACH SWITCH SUPPLIED WITH THE FOLLOWING MOUNTING HARDWARE:
 - (2) 1/4-40 UNS-2B HEX NUTS
 - (1) INTERNAL TOOTH LOCKWASHER
 - (1) LOCATING RING

5 WIRE LUG CONTACTS WILL ACCEPT 2 #20 AWG SOLID OR STRANDED WIRES.





6 MARK SWITCH

7. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).
8. SWITCH DOES NOT INCLUDE BUTTON CAP. DIMENSIONS SHOWN DESCRIBE ALCOSWITCH CAP C22* AND C23* FOUND ON DRAWINGS 1825068 & 1825069 AND SOLD SEPARATELY.
9. LASER MARKING USED FOR PARTS.

 OBSOLETE







THIS DRAWING IS A CONTROLLED DOCUMENT.						DWG M.BINNER	DZMAR09			TE Connectivity Ltd.	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHEK M.ZITTO	15NOV04	NOME	ALCOSWITCH GREEN SERIES PUSHBUTTON SWITCH, MPA SERIES —				
	0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLG ± .012 4 PLC ± — ANGLES ± —	FINISH	—	APPRO M.ZITTO	15NOV04	PRODUCT SPEC					
				APPLICATION SPEC							
MATERIAL —				WEIGHT		SIZE A1		CAGE CODE 00779	DRAWING NO. C-2-1437567-9	RESTRICTED TO —	
CUSTOMER DRAWING						SCALE 3:1		SHEET 1	OF 3	REV A	

REVISIONS					
#	LTG	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

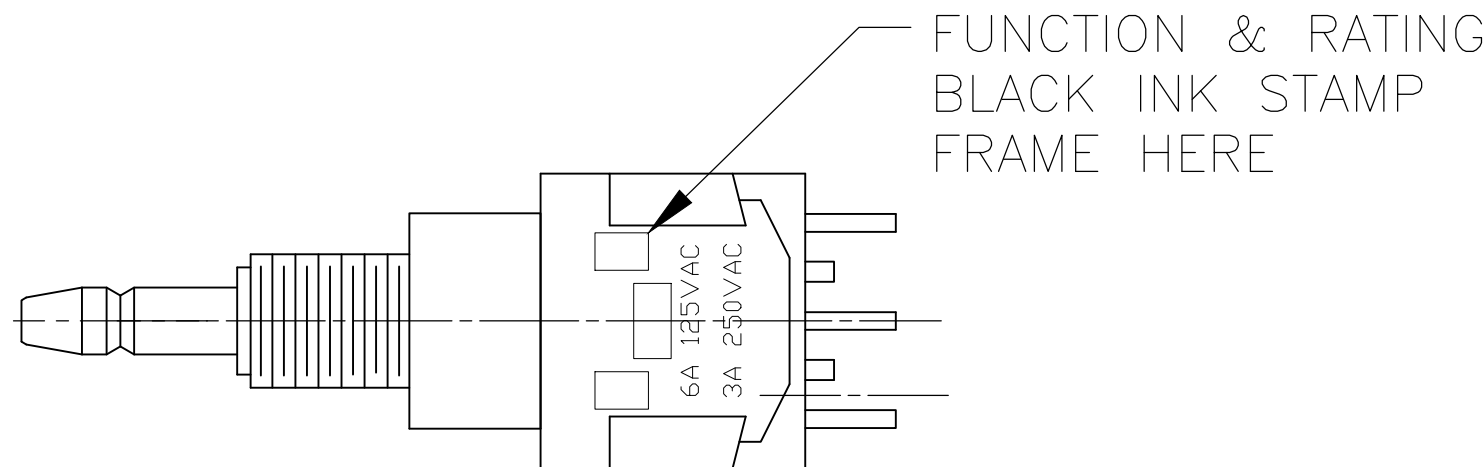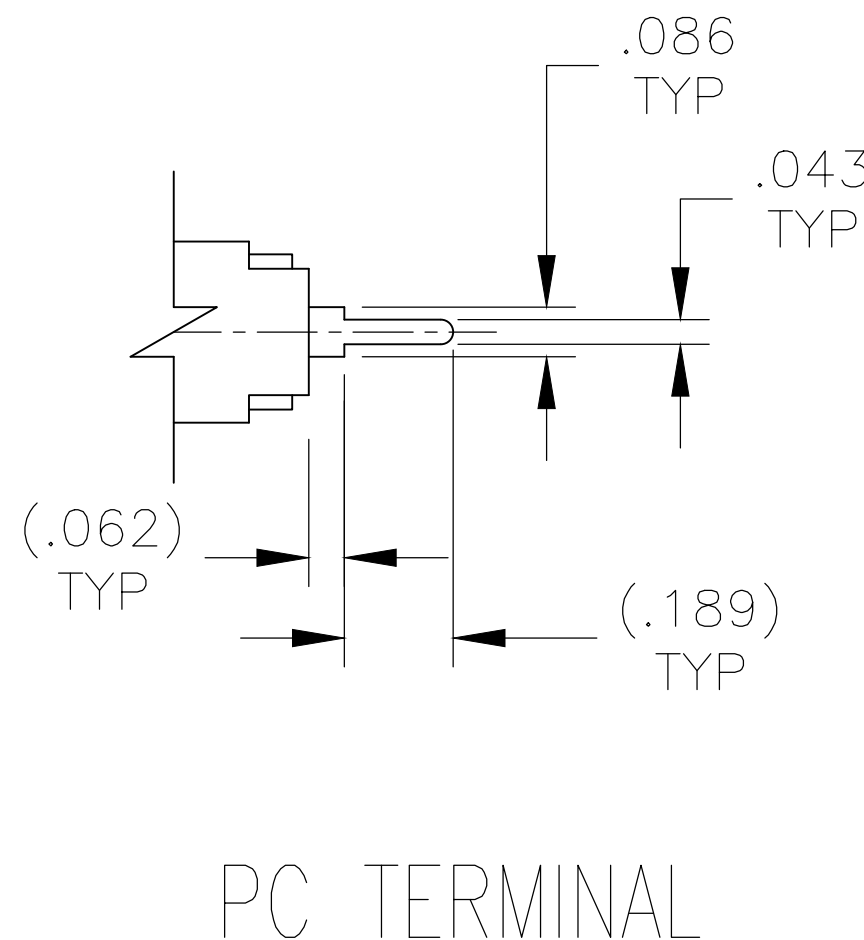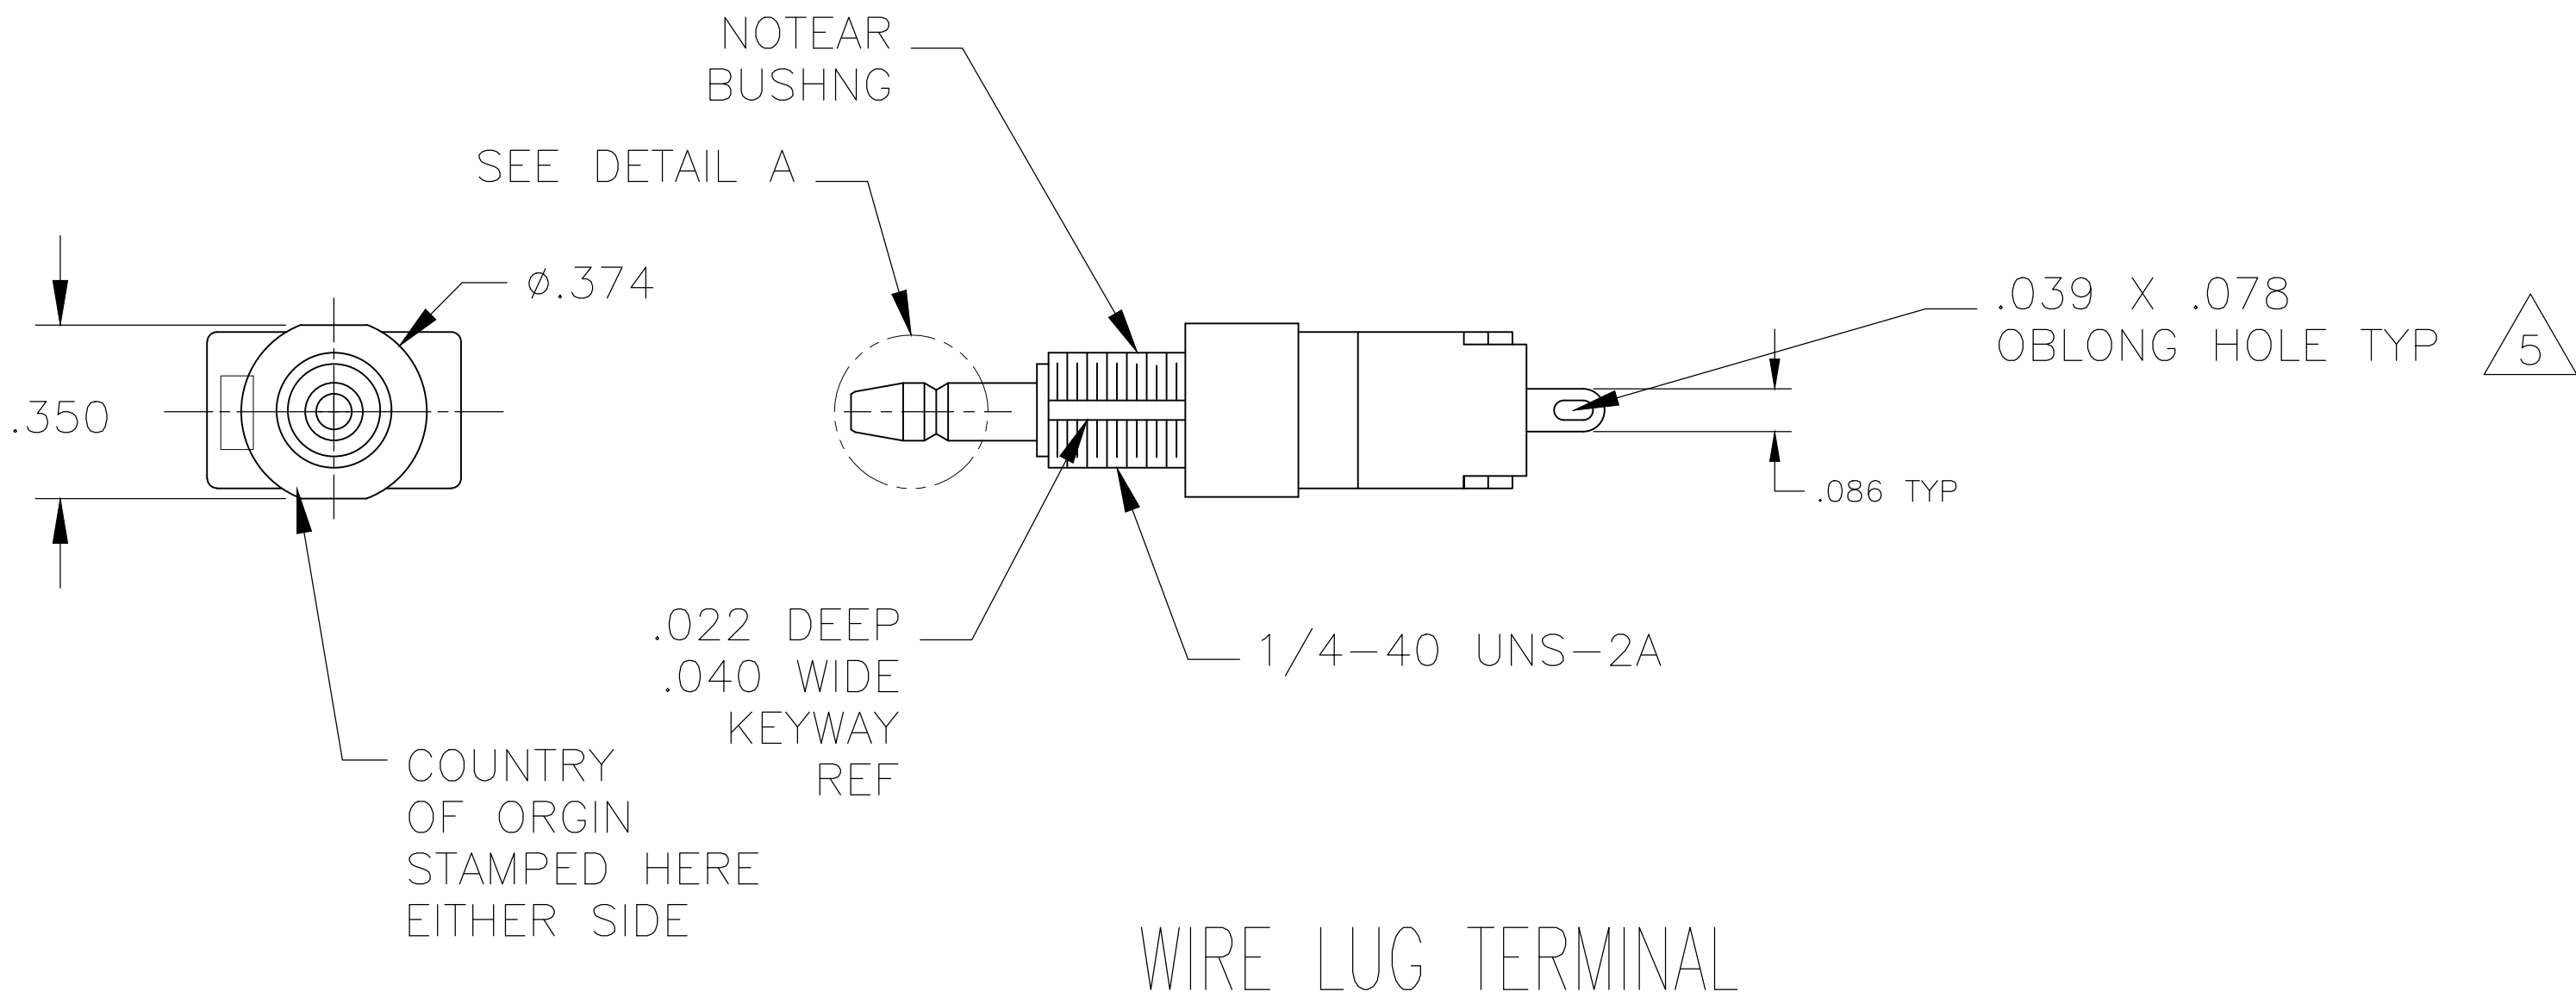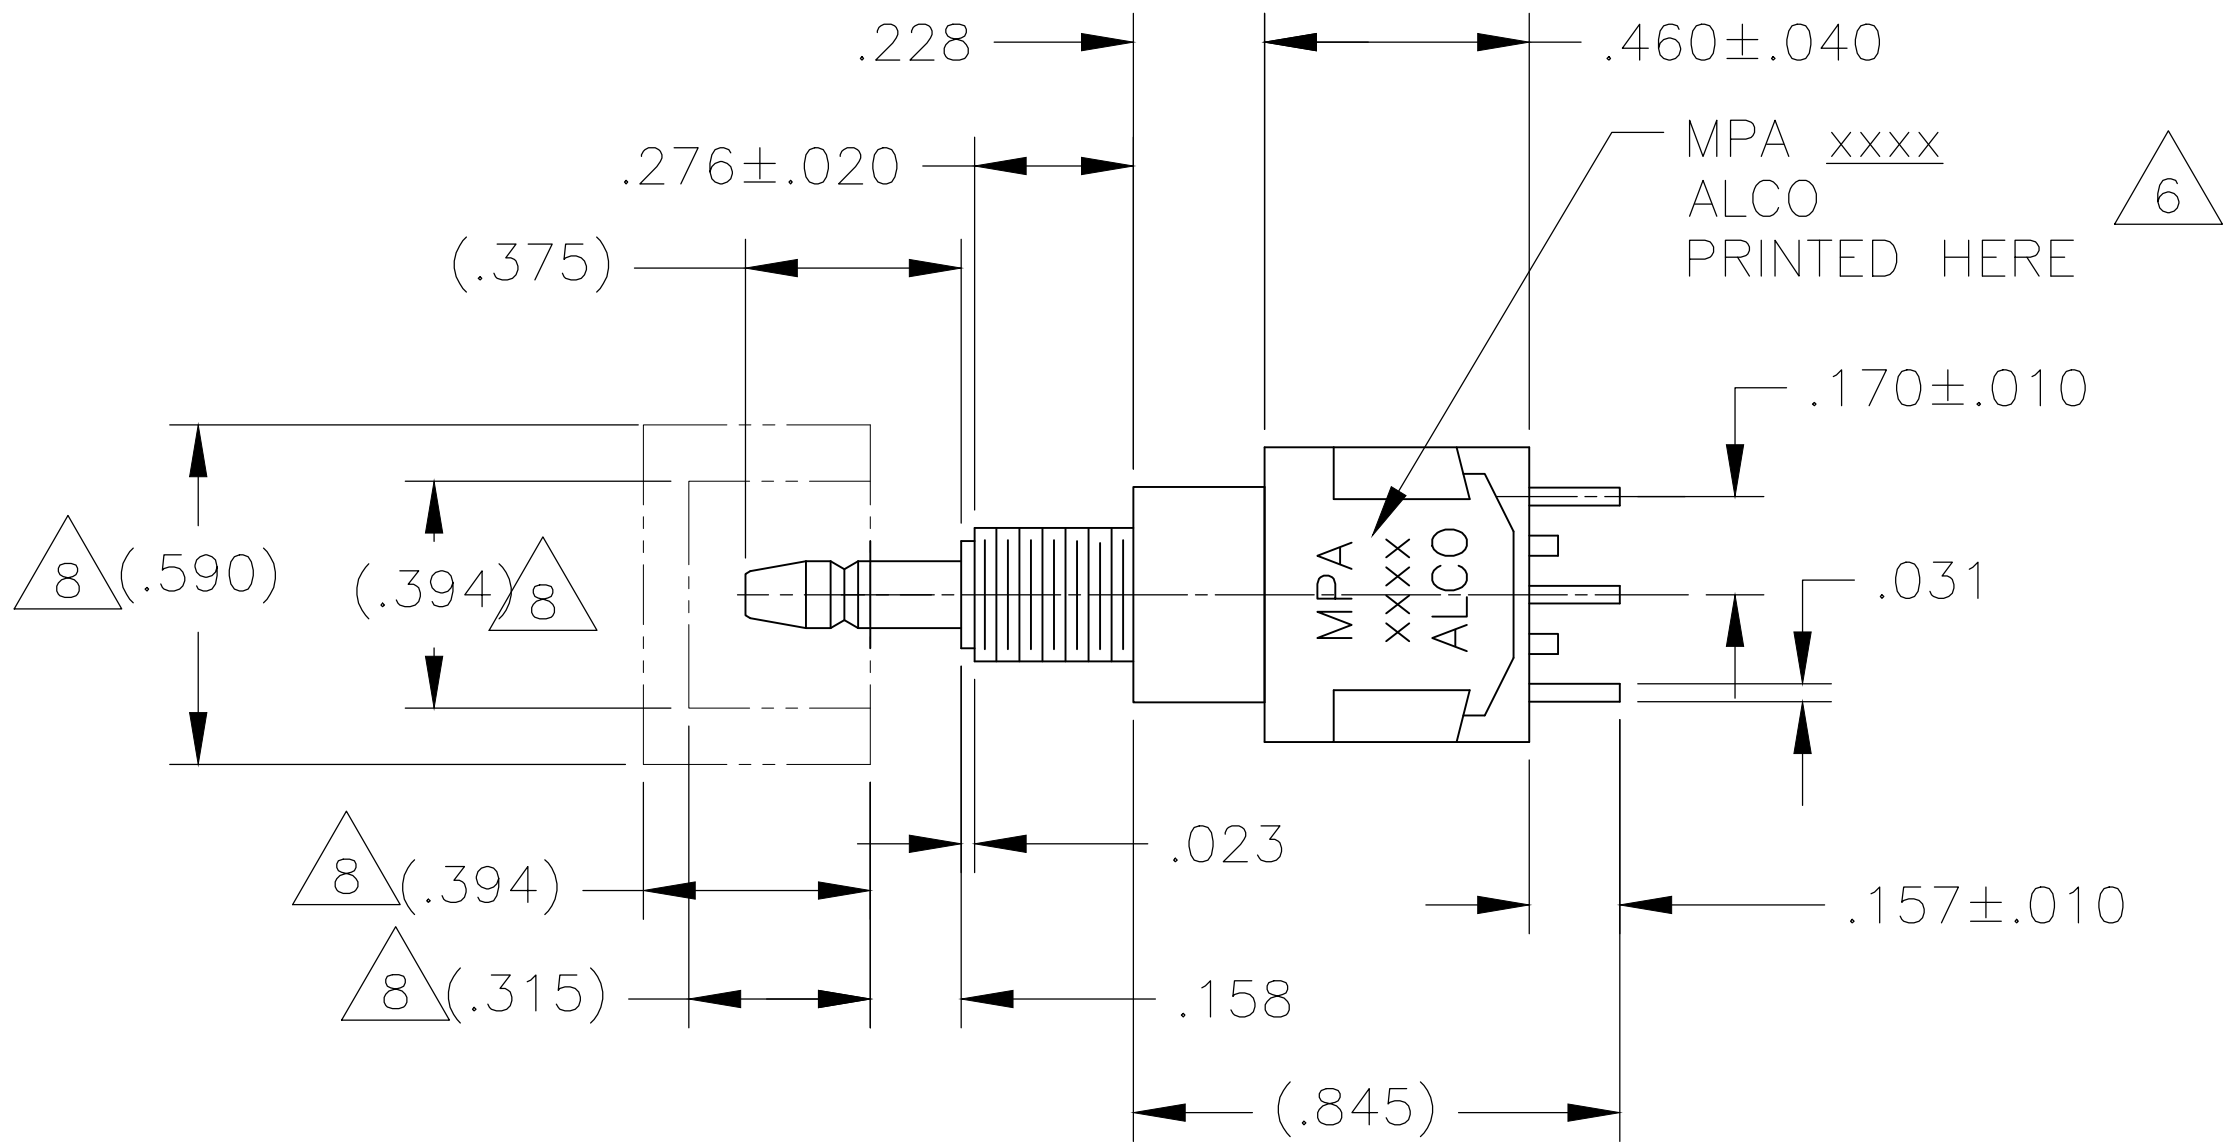

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER	02MAR09	TE Connectivity Ltd.	
DIMENSIONS: INCHES		CHK M.ZITTO	15NOV04		
		APVD M.ZITTO	15NOV04	NAME ALCOSWITCH GREEN SERIES PUSHBUTTON SWITCH, MPA SERIES	
		PRODUCT SPEC		APPLICATION SPEC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		WEIGHT		RESTRICTED TO	
0 PLC ± -		A1 00779		SIZE CAGE CODE DRAWING NO	
1 PLC ± -		2-1437567-9		SCALE 3:1	
2 PLC ± -		CUSTOMER DRAWING		SHEET 2 OF 3	
3 PLC ± .012				REV A5	
4 PLC ± -					
ANGLES ± -					
FINISH -					

REVISIONS					
#	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

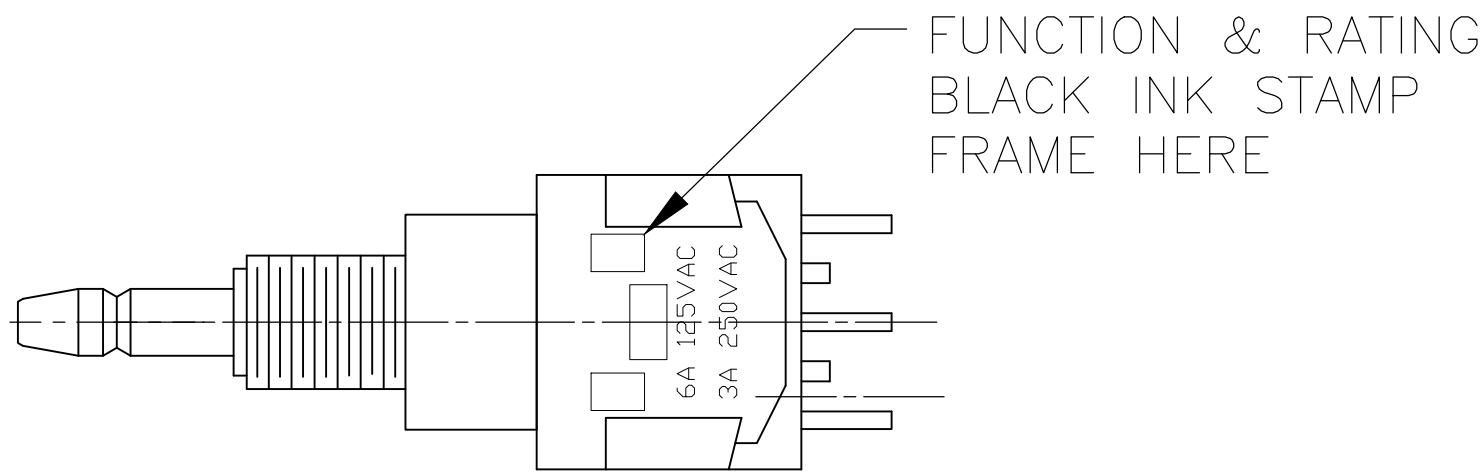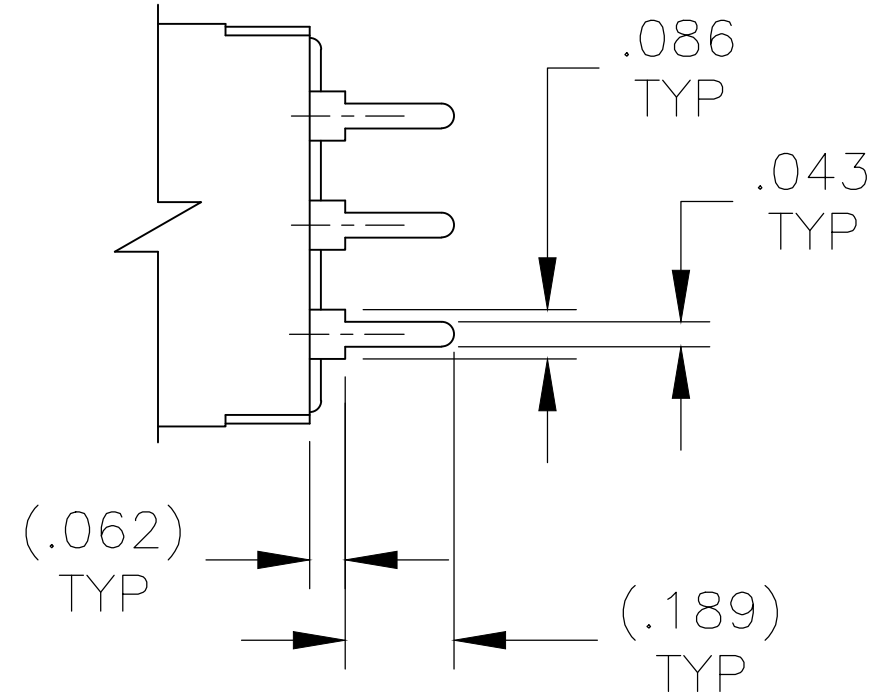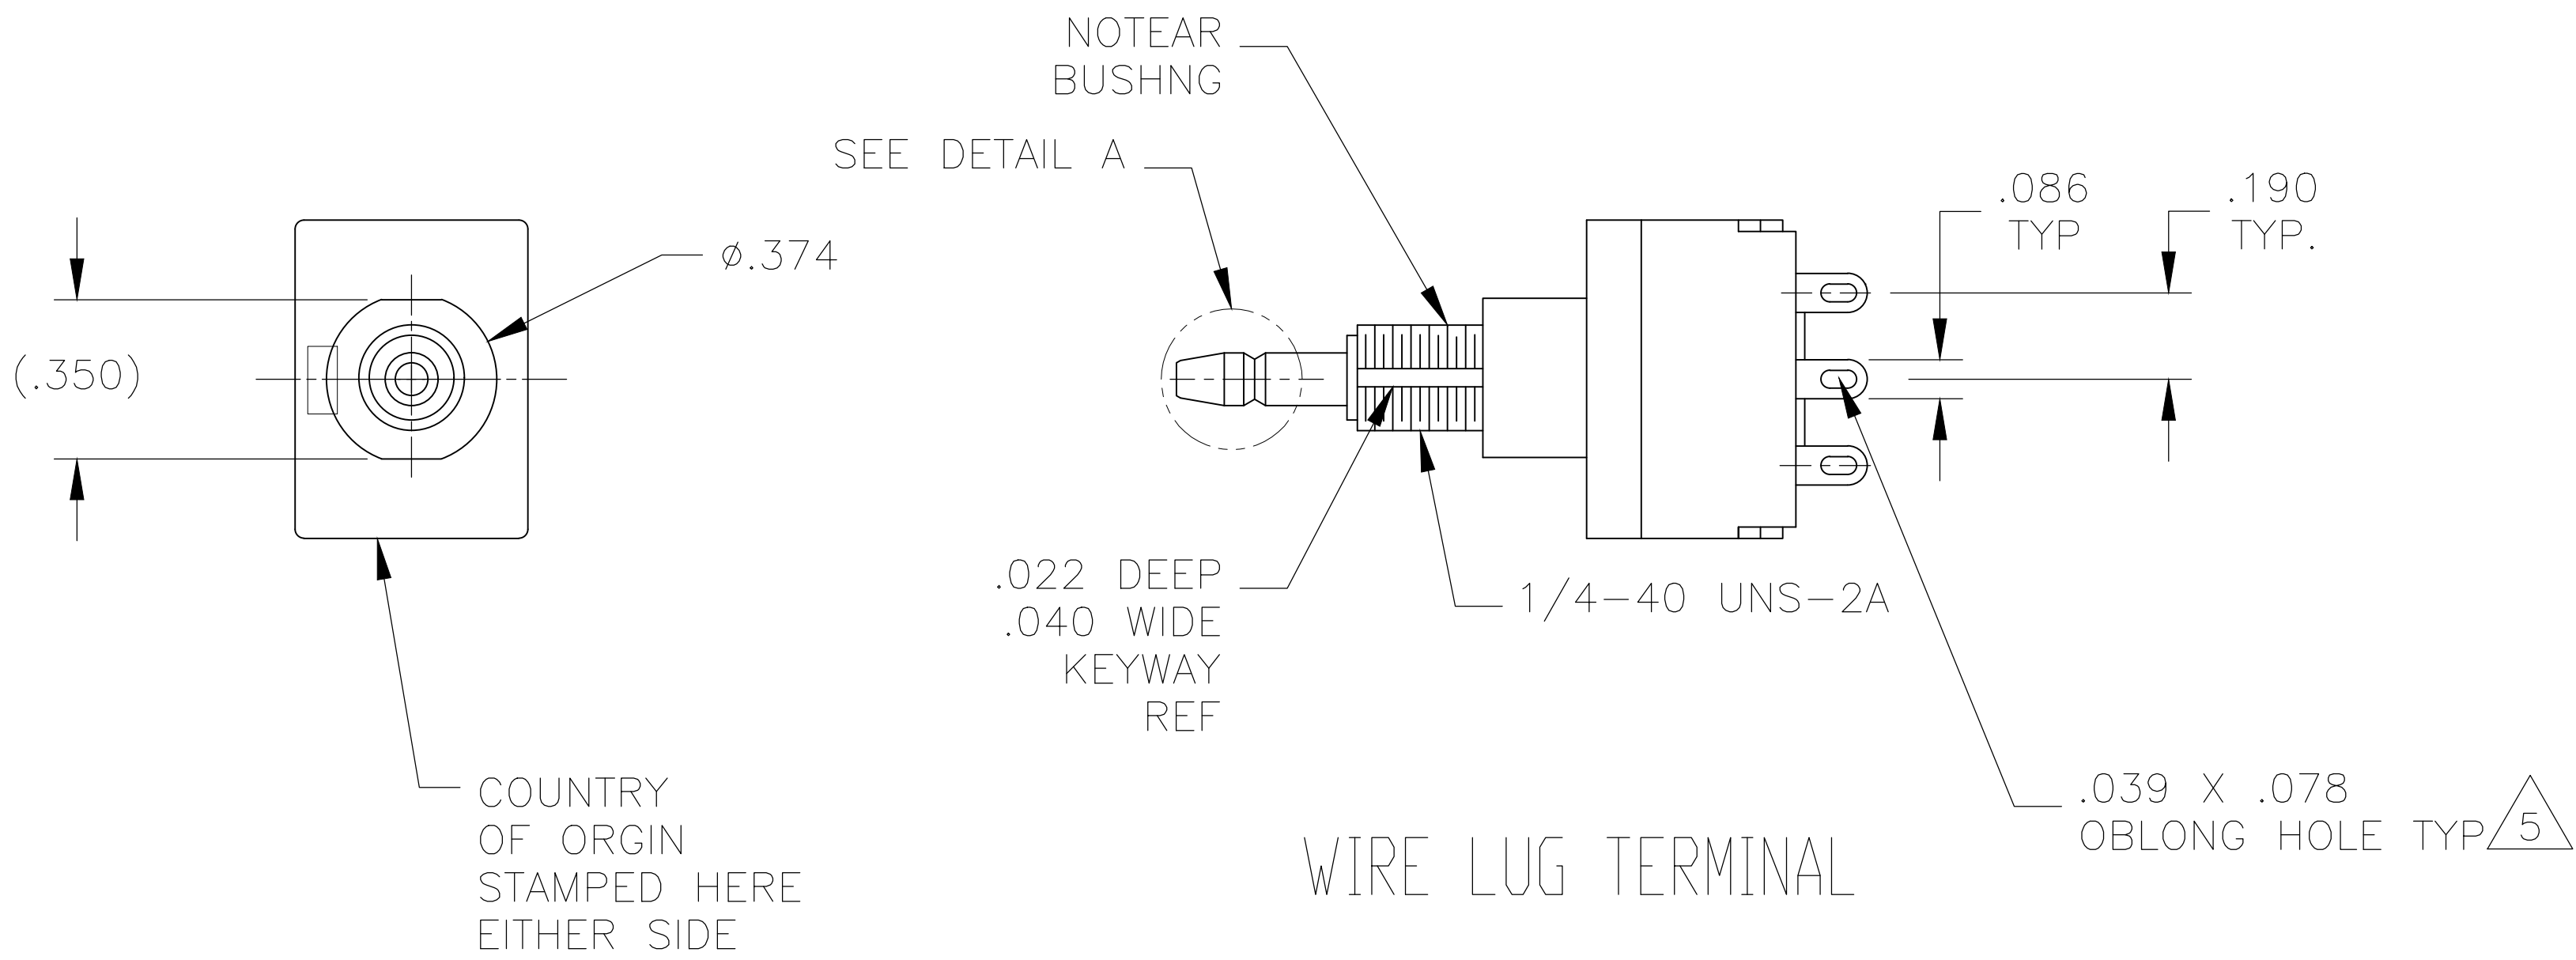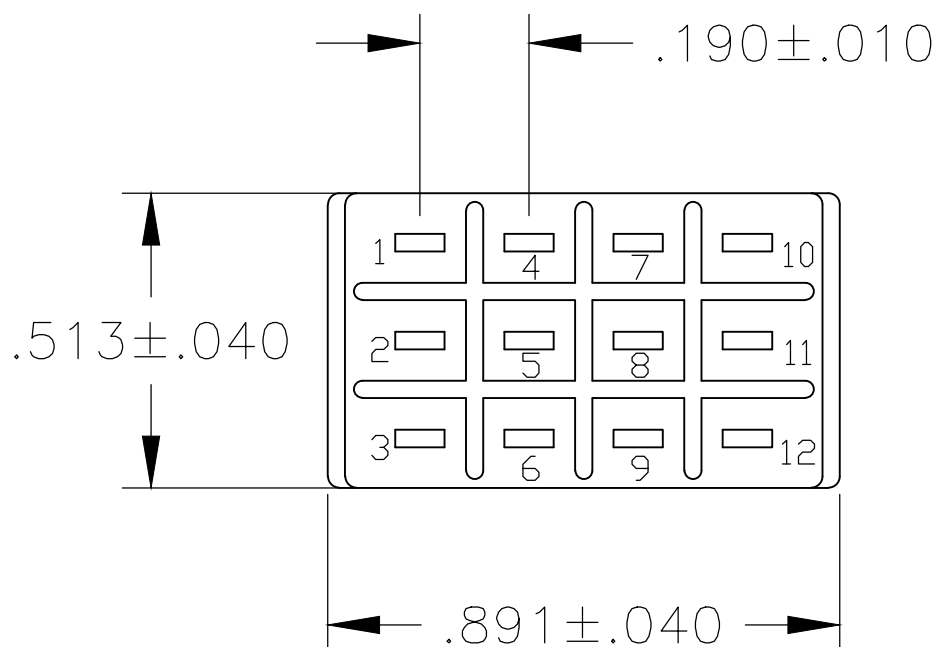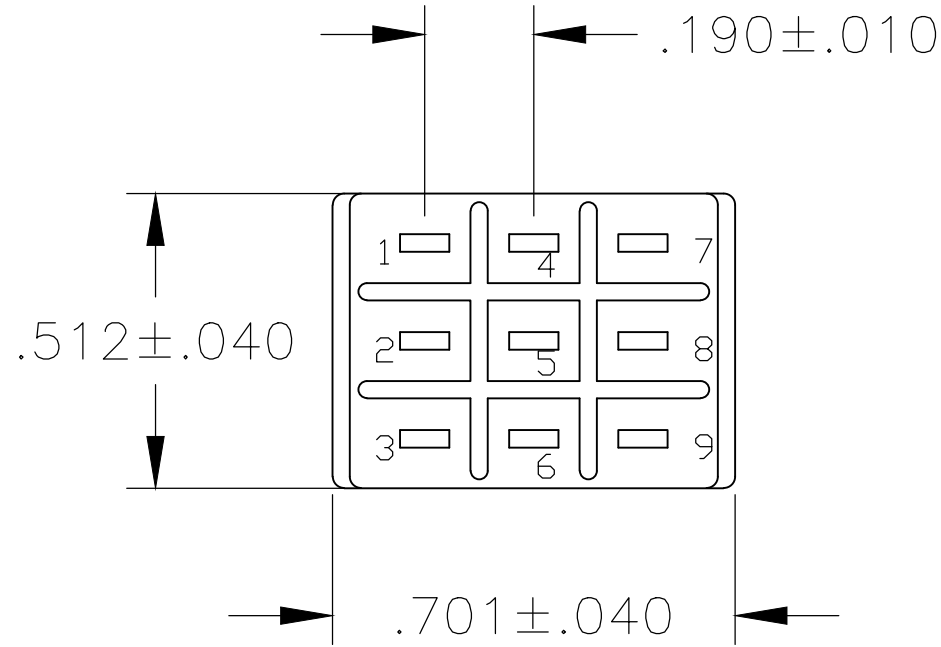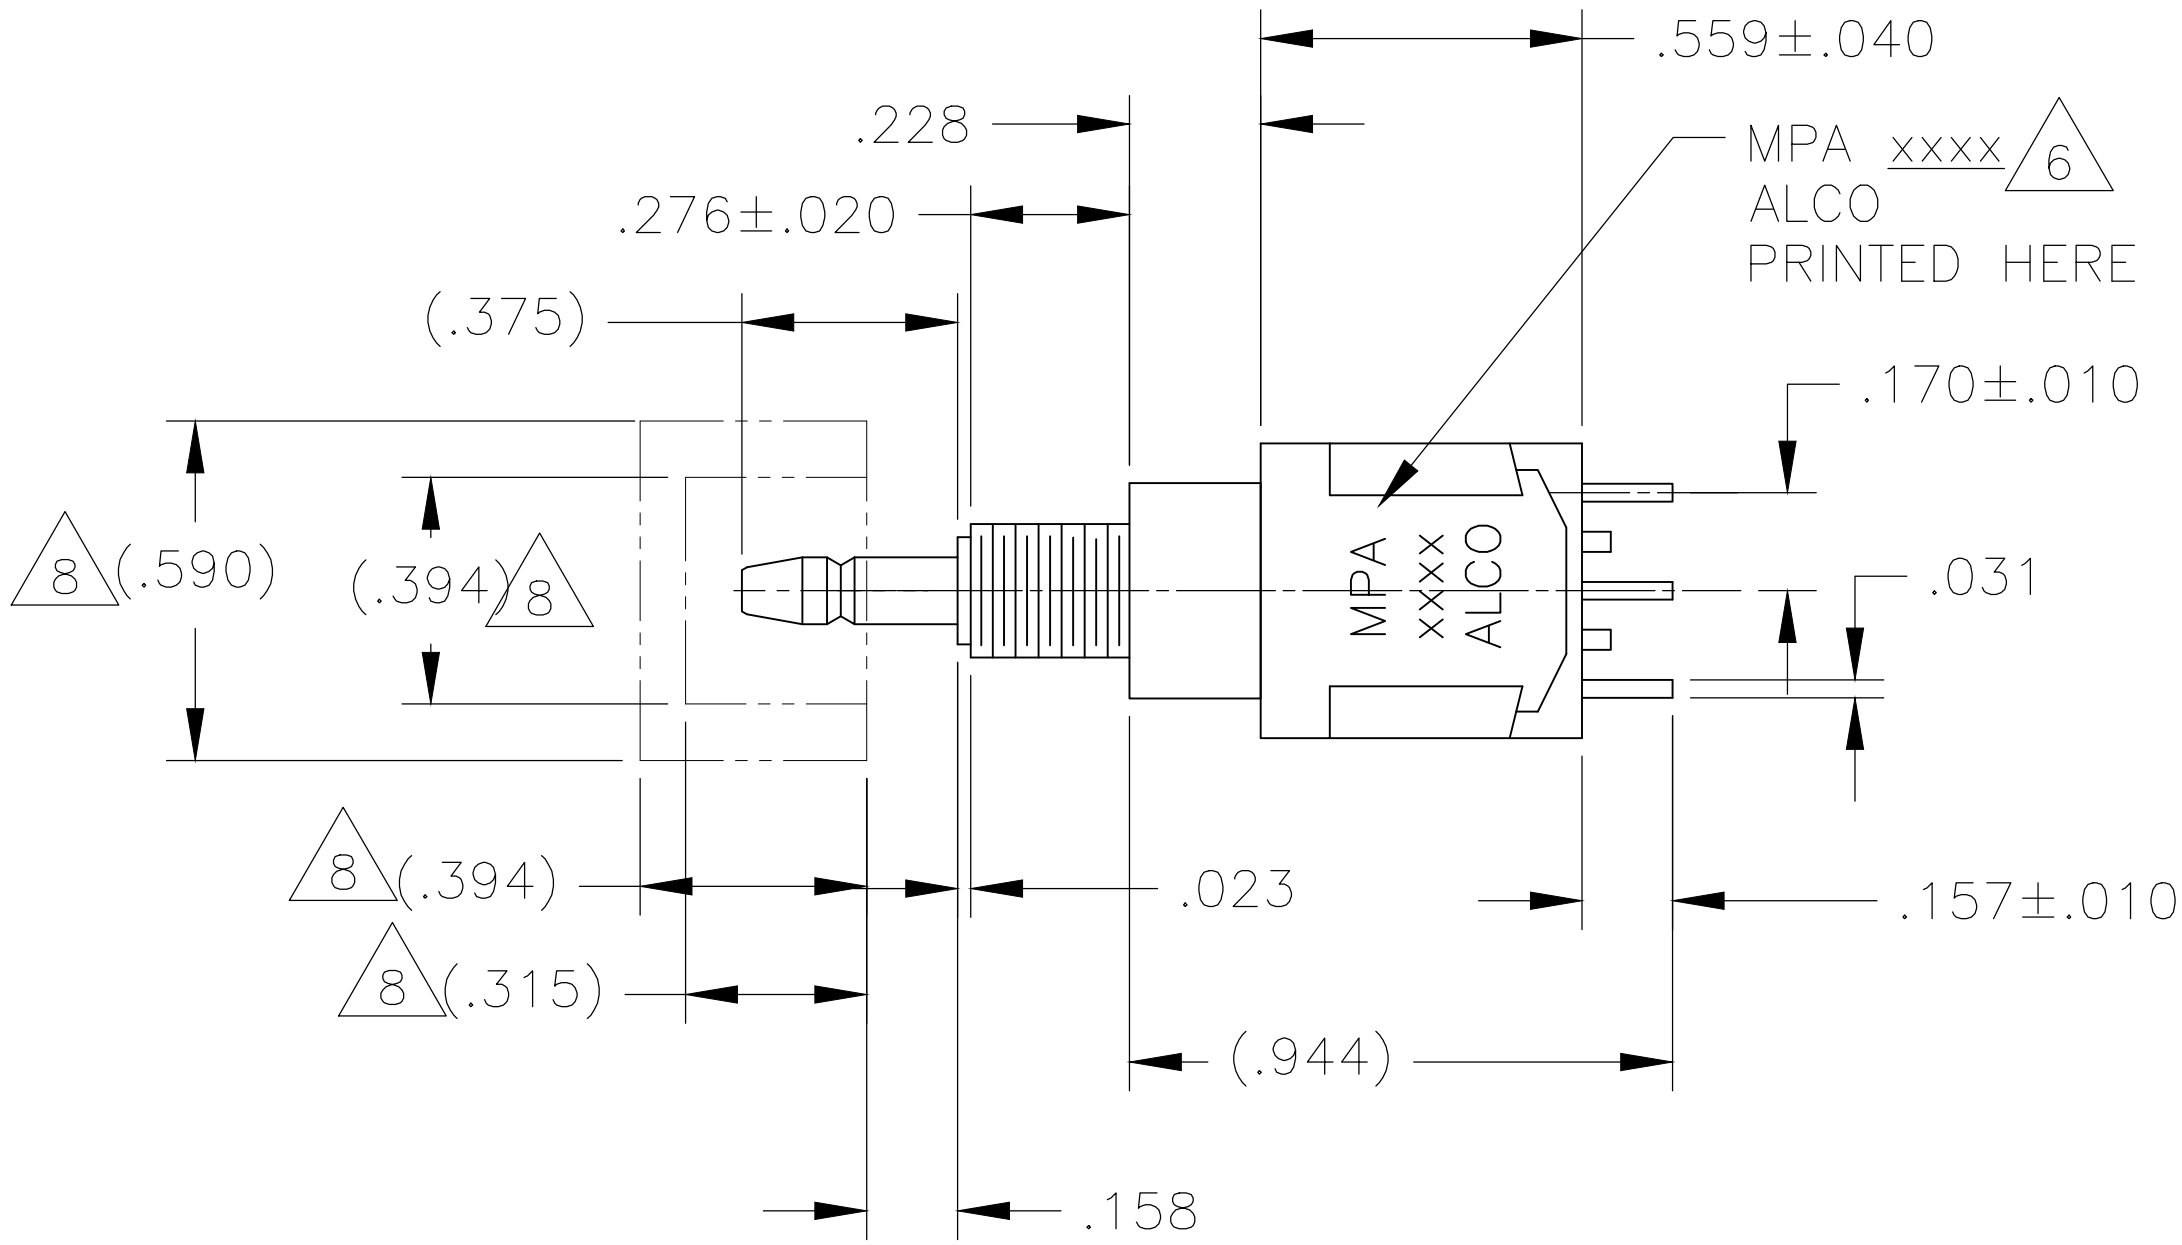

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER	02MAR09	TE Connectivity Ltd.	
DIMENSIONS: INCHES		CHK M. ZITTO	15NOV04		
		APVD M. ZITTO	15NOV04	NAME ALCOSWITCH GREEN SERIES PUSHBUTTON SWITCH, MPA SERIES	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
MATERIAL		FINISH		APPLICATION SPEC	
-		-		WEIGHT	
-		-		CUSTOMER DRAWING	
SIZE A1		CAGE CODE 00779		DRAWING NO 2-1437567-9	
SCALE 3:1		SHEET 3 OF 3		REV A5	