


PX0716/48 Datasheet

 [View Product Page](#)

Product Name // IEC Connector Snap Fit To Panel
Inlet/Outlet PX0716 1.2mm Panel 4.8mm Tab Termination
EN60 320-1 Standard Sheet C14 Class I and EN60 320-2-2
Standard Sheet F Class I

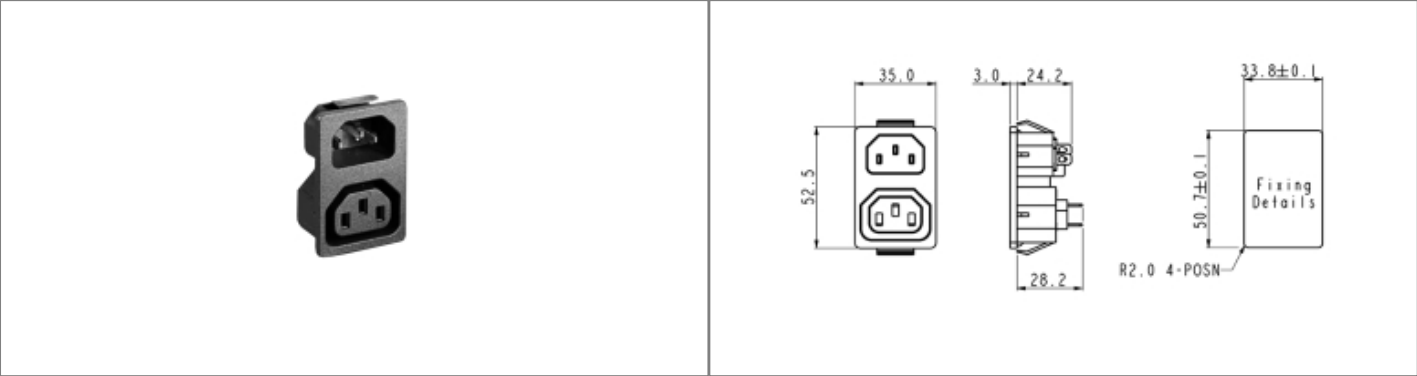

// Product Description:

- ⬢ Snap Fit Panel Mount IEC Inlet Outlet Combination
 - ⬢ EN60 320-1 Standard Sheet C14 Class I and EN60 320-2-2 Standard Sheet F Class I
 - ⬢ Cold Condition
 - ⬢ 1.2mm panel thickness
- ⬢ 4.8mm Tab Termination
 - ⬢ Blanking Cover for front of connector available separately (part code 14228)
 - ⬢ Mate with PX0587, PX0587/SE, PX0588, PX0686, PX0686/SE
 - ⬢ PX0718 Series also available (fused, single Inlet with choice of 1 to 6 Outlets, 1.5mm panel thickness)

// General Information:

Product Display Title:	Snap Fit Panel Mount IEC Inlet Outlet Combination
Product Family:	IEC Connectors
Product Series:	IEC60320 Main Inlets and Outlets
Change Notes:	PRODUCT-MOQ-ADJUSTMENT
Approvals:	UL
Body Material:	Nylon 66
Current Max:	15A
Flamability Rating:	UL94V-0
Function:	Panel Mount Connector
Iec Connector Mates With:	PX0587,PX0587/SE,PX0588,PX0686,PX0686/SE
Iec En60620 Type:	EN60 320-1 Standard Sheet C14 Class I and EN60 320-2-2 Standard Sheet F Class I
Max Operating Temperature:	+70°C
Min Operating Temperature:	-20°C
Max Panel Thickness:	1.2mm
Min Panel Thickness:	1.2mm
Number Of Contacts:	3 Contacts
Voltage Max:	125V

// Product PDF Links

 [IEC Connectors product data](#)

// Product 3D CAD Model Links

 [PX0716/483D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)