

6

5

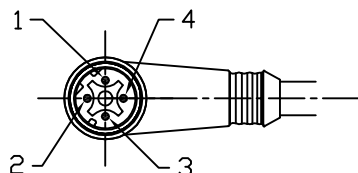
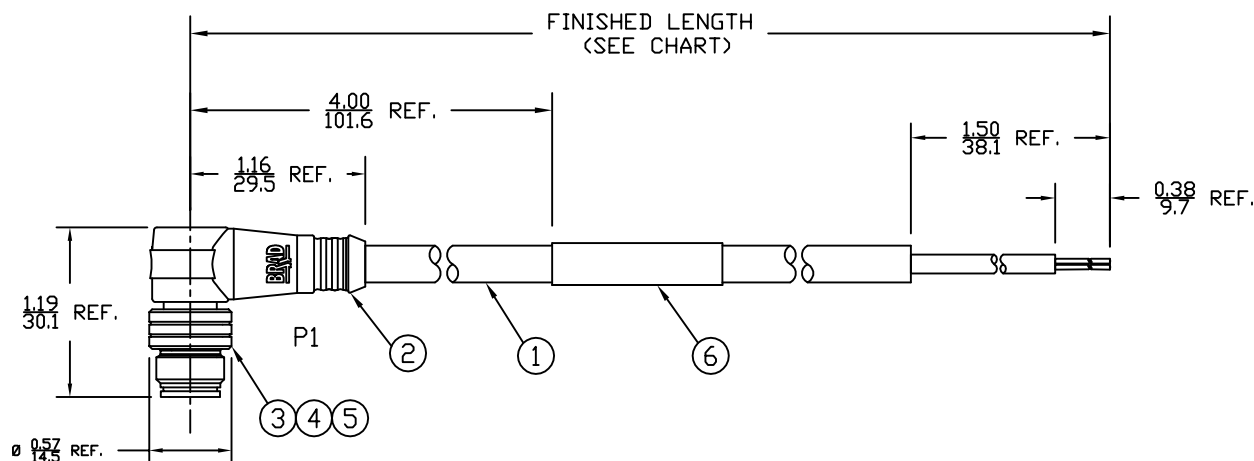

4

3

2

1

PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300480062	E10A00703M010	3' 3" +2.19'/-0' [1M +55.6/-0 mm]
1300480064	E10A00703M050	16' 4" +6.5'/-0' [5M +165.0/-0 mm]

AUX VIEW
SCALE 1:4

MALE- FACE VIEW

P1	
1	ORANGE
2	BLUE
3	ORG/WHITE
4	BLUE/WHITE

WIRING DIAGRAM

NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) CABLE: #24/4 UNSHIELDED PVC
- 4) ELECTRICAL DATA:
ACCORDING TO CAT5e ETHERNET STANDARD
MAX. VOLTAGE: 30V
MAX. CURRENT 1.5A
- 5) ENVIRONMENTAL:
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO 75°C
- 6) WRAP LABEL IS MARKED WITH P/N, DATE CODE,
VOLTAGE & AMPERAGE.
- 7) ASSEMBLY IS RoHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	LABEL	PLASTIC FILM	BLACK/YELLOW
5	1	INSERT	PUR	BLACK
4	4	PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	1	M12 COUPLING NUT	BRASS	NICKEL
2	1	OVERMOLD	PUR	BLACK
1	1	ETHERNET CABLE-CAT5E	PVC JACKET	TEAL

SD RELEASE EC NO: WEU2010-0005 7/10/09 DRWN: VOU CHKD: BWOODMAN APPR: JFMURPHY 2009/07/20		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 3:4	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
					mm	INCH	DRAWN BY VOU		DATE 2009/07/06	TITLE MICRO-CHANGE CABLE ASSY 4P M/MP 90 D-CODE #24/4 UNSHIELDED PVC			
				4 PLACES	±----	±----	CHECKED BY BWOODMAN		DATE 2009/07/31				
				3 PLACES	±----	±.005	APPROVED BY ---		DATE ---				
				2 PLACES	±----	±.010							
				1 PLACE	±----	±.020	molex		MOLEX INCORPORATED				
				ANGULAR ±1/2°									
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
							SEE CHART		SD-120108-016		1 OF 1		
							SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
1		REV											

6

5

4

3

2

1