

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

88X030XXXXXX

88=Micro-Change
M12x1
Double ended

Contacts:
3=3 Contacts
4=4 Contacts
5=5 Contacts
8=8 Contacts

Heads style:
030=Plug Female Straight
to Plug Male Straight

Cable type: See Table

Units:
M=Meter

Length
Examples:
005=0.5 unit
010=1 unit
100=10 units


OPTIONS

Overmold color:
Blank (Standard)=Black TPU
Blank=Yellow PVC for cables
A09, S19, S20, S26
Blank=Yellow TPE-E for cables
K03, K05
A=Grey / G=Black / Y=Yellow

Coupling Nut:
Blank (Standard)=Knurled Brass Ni Plated
1=Hexagonal Stainless steel
5=Knurled Derlin
7=Knurled Brass Ni Plated, Teflon Coated
Blank=7 for cables I20, I26, K03, K05, P82, S26
8=Type 316 stainless steel
9=Knurled / Hexagonal Brass Ni Plated SW13

H= 2 pcs. of I/D Carrier PVC Transparent
(Cables Ixx & P82 always with 2 pcs. of
I/D Carrier even if no H in Engineering No.)

COUPLING NUT
FEMALE MALE

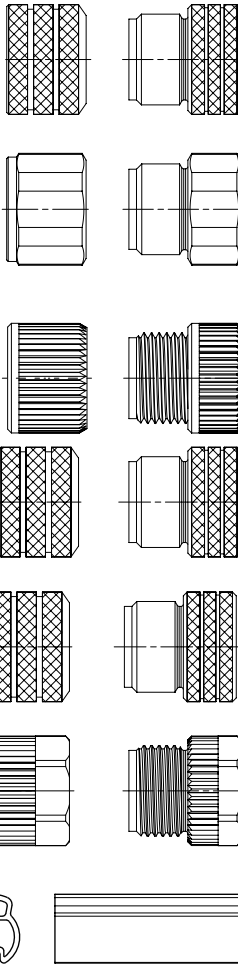

CABLE LENGTH TOLERANCES		
OVER [mm]	UP TO AND INCLUDING [mm]	TOLERANCES [mm]
0	305	+19
305	915	+45
915	1830	+56
1830	3660	+89
3660	7320	+165
7320	14640	+317
14640	30500	+610
30500	>	+2% OF FINISHED LENGTH

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

mm

SCALE

1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 1.0 °

4 PLACES ±

3 PLACES ±

2 PLACES ± 0.05

1 PLACE ± 0.3

0 PLACES ± 0.5

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#516585

EC NO: 823299

DRWN: VISHAH2

CHK'D: GGA

APPR: GGA

INITIAL REVISION:

DRWN: JMARSZALEK

APPR: RSILLER

THIRD ANGLE PROJECTION

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

2025/05/16

2025/05/29

2025/05/29

2016/09/19

2016/12/08

A3-SIZE

120066

SEE PART LIST

GENERAL MARKET

2 OF 5

molex

CSE M12 XP AC FE STR MA STR XM DE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

1200668165

DOC TYPE

PSD

DOC PART

000


REVISION

A9


CABLE INFORMATION(for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN	SHIELD
A09	4	22AWG	PVC YELLOW	UL 2661	I/II A/B 80°C/300V	-	-	-	-
B02	4	18AWG	PUR YELLOW	UL 20549	I/II A/B 80°C/300V	-	-	-	-
E52	3 / 4	0.34mm²	PVC GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	-
E57	5	0.34mm²	PVC GREY	-	-	-	-5°C to +70°C	-	-
I03	3 / 4 / 5	0.34mm²	PVC CEI GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	-
I20	3 / 4	0.34mm²	PVC CEI GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	YES
I26	5	0.34mm²	PVC CEI GREY	-	-	-30°C to +70°C	-5°C to +70°C	-	YES
A8K03	4 / 5	18AWG	TPE YELLOW	UL ITC or PLTC	I/II A/B 90°C/300V	max 105°C	-	2 000 000 cycles, >15xO.D.	-
K05	3 / 4 / 5	22AWG	TPE YELLOW	UL ITC or PLTC	I/II A/B 90°C/300V	max 105°C	-	2 000 000 cycles, >15xO.D.	-
P20	3 / 4 / 5	0.34mm²	PUR BLACK LS0H	-	-	-30°C to +80°C	-	-	YES
P82	3 / 4 / 5	0.34mm²	PUR IRR ORANGE	-	-	-50°C to +105°C, >5xO.D.	-40°C to +105°C, >7.5xO.D.	-	-
S19	8	0.25mm²	PVC YELLOW	UL 2661/1569	C22.2 II A 105°C/300V	-30°C to +105°C, >10xO.D.	-15°C to +105°C, >15xO.D.	2 000 000 cycles, >15xO.D.	YES
S20	3 / 4 / 5	0.34mm²	PVC YELLOW	UL 2661/1731	C22.2 II A 105°C/300V	-30°C to +105°C	-	-	YES
S26	5	0.34mm²	PVC YELLOW	UL 2661/1731	C22.2 II A 105°C/300V	-30°C to +105°C	-	-	YES



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETED PART NUMBERS AS PER PCN#516585				molex CSE M12 XP AC FE STR MA STR XM DE								
mm		1:1														
GENERAL TOLERANCES (UNLESS SPECIFIED)																
ANGULAR TOL		± 1.0 °		EC NO: 823299 DRWN: VISHAH2 2025/05/16 CHK'D: GGA 2025/05/29 APPR: GGA 2025/05/29				PRODUCT CUSTOMER DRAWING								
4 PLACES		±														
3 PLACES		±						INITIAL REVISION: DRWN: JMARSZALEK 2016/09/19 APPR: RSILLER 2016/12/08				DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
2 PLACES		± 0.05										1200668165		PSD	000	A9
1 PLACE		± 0.3														
0 PLACES		± 0.5														
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		
						A3-SIZE		120066		SEE PART LIST		GENERAL MARKET		3 OF 5		

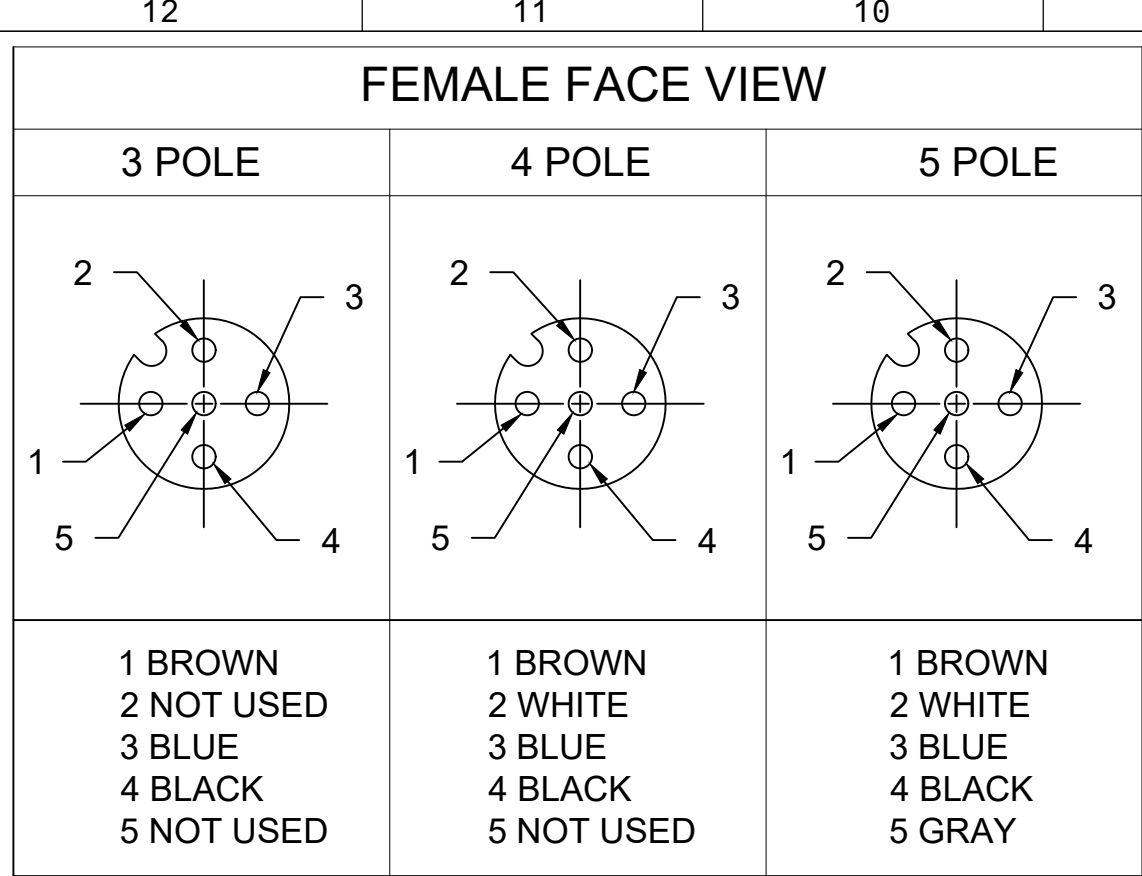

PART NO.	ENGINEERING NO.	FINISHED LENGTH	POLES	CABLE DIA.
1200660675	883030K05M005	0.5M [1FT 8 IN]	3	.20[5.1]
1200660695	884030K05M100	10M [32FT 10 IN]	4	.21[5.3]
1200662239	885030K05M300	30M [98FT 5 IN]	5	.23[5.8]

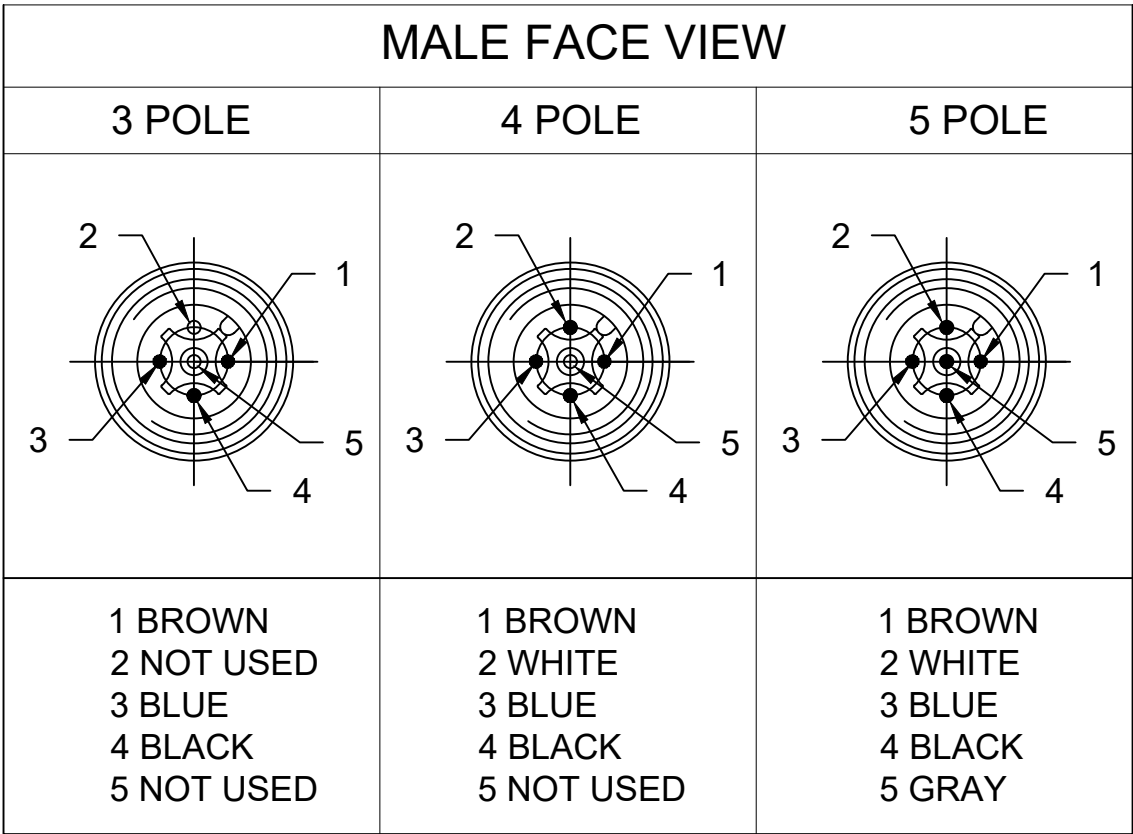

- NOTES:
- 1. MATERIAL: AS NOTED
 - 2. FINISH: AS NOTED
 - 3. ELECTRICAL:
VOLTAGE: 250V
CURRENT: 4A
 - 4. TEMP RATING: -20°TO +105°C
 - 5. PROTECTION: IP67 (WHEN MATED)
 - 6. COUPLING THREAD: M12 X 1
 - 7. UL RECOGNIZED FILE: E152210
CSA CERTIFIED FILE: LR6837
 - 8. ALL DIMENSIONS ARE FOR REFERENCE
UNLESS TOLERACED OR NOTED OTHERWISE

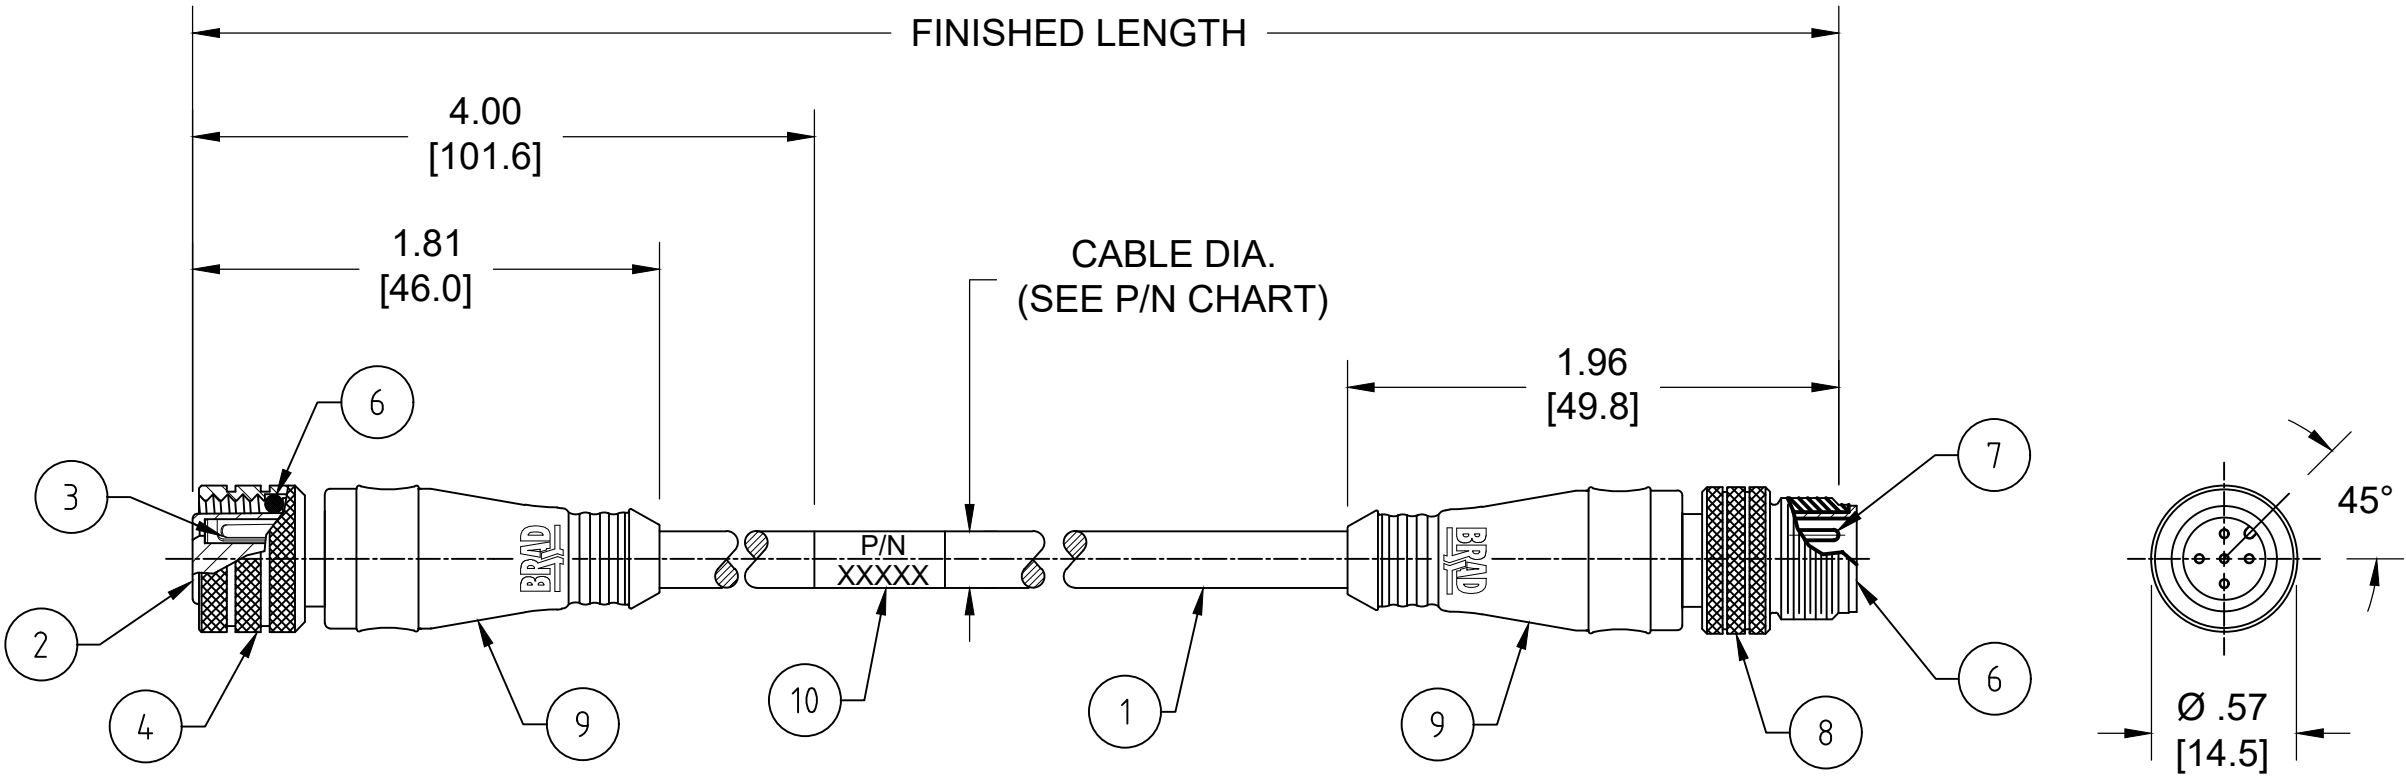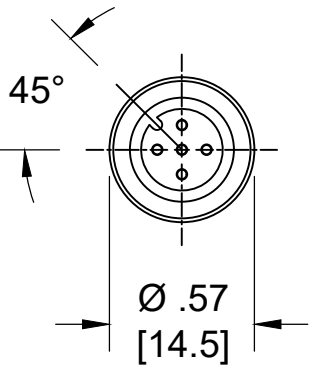

CABLE FLEX CHARACTERISTICS

TORSIONAL FLEX TEST	5 MILLION CYCLES PER MIL-C-13777G
BEND FLEX TEST	6.5 MILLION CYCLES PER MIL-C-13777G
DRAG CHAIN TEST	20 MILLION CYCLES PER MIL-C-13777G
WELD SLAG RESISTANCE	WOODHEAD STANDARD S-300

10	WRAP LABEL	VINYL	BLACK/WHITE
9	OVERMOLD	TPC	YELLOW
8	MALE COUPLING NUT	BRASS	NICKEL PLATED
7	CONTACT PIN	COPPER ALLOY	GOLD PLATED
6	MALE INSERT	PUR	BLACK
5	O-RING	VITON	RED
4	FEMALE COUPLING NUT	BRASS	NICKEL PLATED
3	CONTACT SOCKET	COPPER ALLOY	GOLD PLATED
2	FEMALE INSERT	PUR	BLACK
1	#22/3-5 AWG CABLE	TPE JACKET	YELLOW
ITEM	DESCRIPTION	MATERIAL	FINISH

PART NUMBER LEGEND

883030K05M005

POLES: 3,4 & 5

CABLE TYPE
22AWG
TPE YELLOW

FINISHED LENGTH:
M005 = 0.5 METER
M010 = 1 METER
M100 = 10 METER

CABLE LENGTH TOLERANCES

<.3M [1FT]: +19mm-0 [+.75in-0]
.3 - .9M [1 - 3FT]: +44.5mm-0 [+1.75in-0]
.9 - 1.8M [3 - 6FT]: +55.6mm-0 [+2.19in-0]
1.8 - 3.7M [6 - 12FT]: +88.9mm-0 [+3.50in-0]
3.7 - 7.3M [12 - 24FT]: +165.1mm-0 [+6.50in-0]
7.3-14.6M [24 - 48FT]: +317.5mm-0 [+12.50in-0]
14.6 - 30.5M [48-100FT]: +622.3mm-0 [+24.50in-0]
OVER 30M [100FT] +2% OF FINISHED LENGTH

FUNCTIONAL SYMBOLS F A =0 F E =0 F P =0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		
	DIMENSION UNITS		SCALE		CURRENT REV DESC: ITEM-9 WAS TPE. ITEM-10 WAS BLACK/YELLOW. MODIFIED CABLE FLEX CHART, TEMP RATING AND PART NUMBER CHART			molex MICRO-CHANGE CORDSET, M12 3-5 POLE, MALE-FEMALE, STRAIGHT, SINGLE KEY, #22AWG TPE CABLE PRODUCT CUSTOMER DRAWING											
	INCH/MM		NTS																
	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 785985 DRWN: ABENJAMINLW 2024/05/07 CHK'D: PDODDAMANEMY 2024/05/13 APPR: BWOODMAN 2024/05/13 INITIAL REVISION: DRWN: LSTEMMLE 2010/01/25 APPR: NSTAUDIG 2010/01/29						DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION				
		mm	INCH								SD-120066-011		PSD	001	C				
	4 PLACES	± ----	± ----																
	3 PLACES	± ----	± ----																
	2 PLACES	± ----	± ----																
	1 PLACE	± ----	± ----		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION 		DRAWING C-SIZE		SERIES 120066		MATERIAL NUMBER SEE CHART		CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 1		
	0 PLACES	± ----	± ----																
ANGULAR TOL. ± ---- °																			