
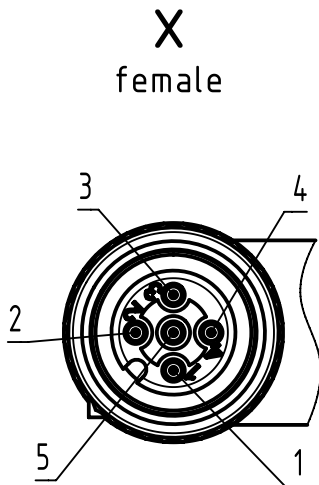



Connector Location A

Connector Location B

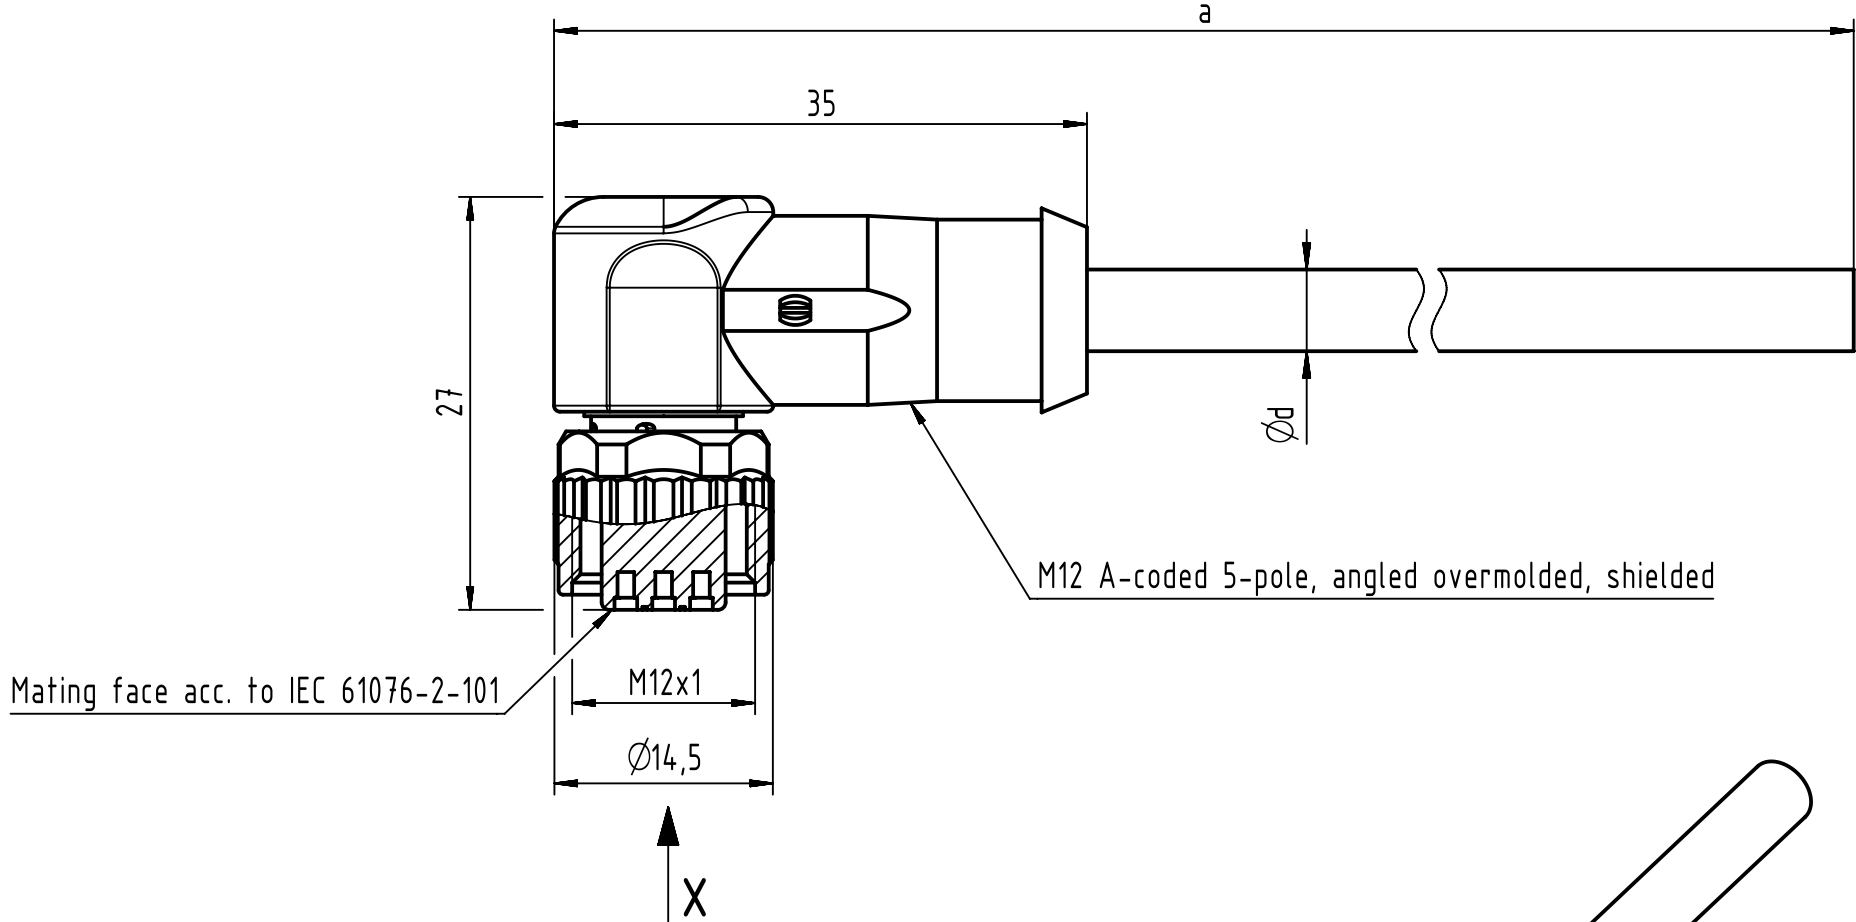

Loading Plan

Shield
1 brown
2 white
3 blue
4 black
5 grey

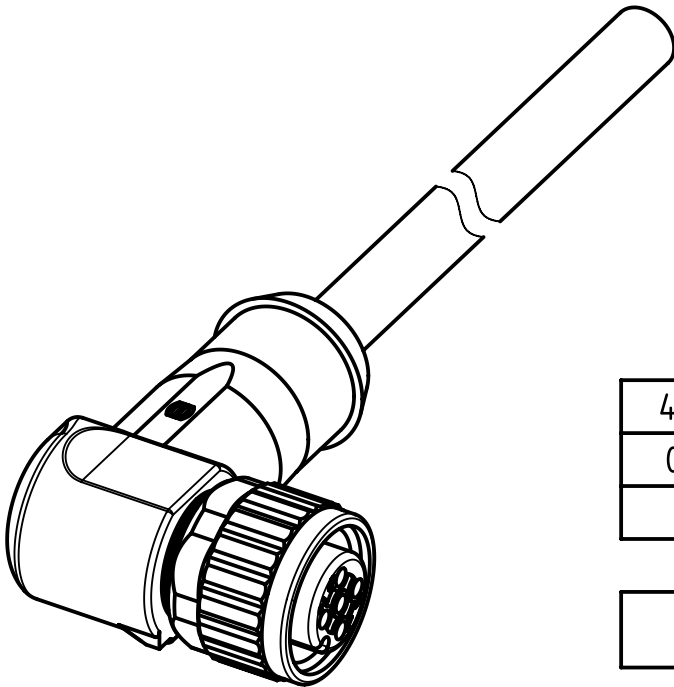

4.0 to 100	$\pm 1\%$
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

Part no.	213477005XXXXX
----------	----------------

Dim. d[mm]	Type of cable	XX
$\varnothing 5.6$	PUR black, 5x0.34mm ²	XX=68
$\varnothing 5.4$	PVC grey, 5x0.25mm ²	XX=69

- Protection level: IP67
- Temperature range: -25°C ... +80°C

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by STOCHECIC Stocheci		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean	
Department HCS - RO		Date 2019-03-27		State Final Release		Doc-Key / ECM-Nr. 100650278/UGD/011/E 500000149491	
HARTING Customised Solutions		Title M12 A-cod an/- f/- shld.		Rev. E		Page 1/1	
D-32339 Espelkamp		Type TB		Number 213477005XXXXX			