


10	9	8	7	6	5	4	3	2
MATERIAL NO.	ENGINEERING NO.	FINISHED LENGTH						
1200652213	804000A14M010A	3' 4" +2.19-0 (1M +55.6mm-0)						
1200652223	804000A14M020A	6' 7" +3.50-0 (2M +88.9mm-0)						
1200652224	804000A14M030A	9' 10" +3.50-0 (3M +88.9mm-0)						
1200652220	804000A14M050A	16' 5" +6.50-0 (5M +165.1mm-0)						
1200652225	804000A14M100A	32'10" +12.50-0 (10M +317.5mm-0)						

CUSTOMER PRODUCTION APPROVAL
 APPROVED BY: _____
 DATE: _____
 MUST BE SIGNED AND RETURNED BEFORE
 PRODUCTION WILL BEGIN.

RESTRICTED SALES DRAWING

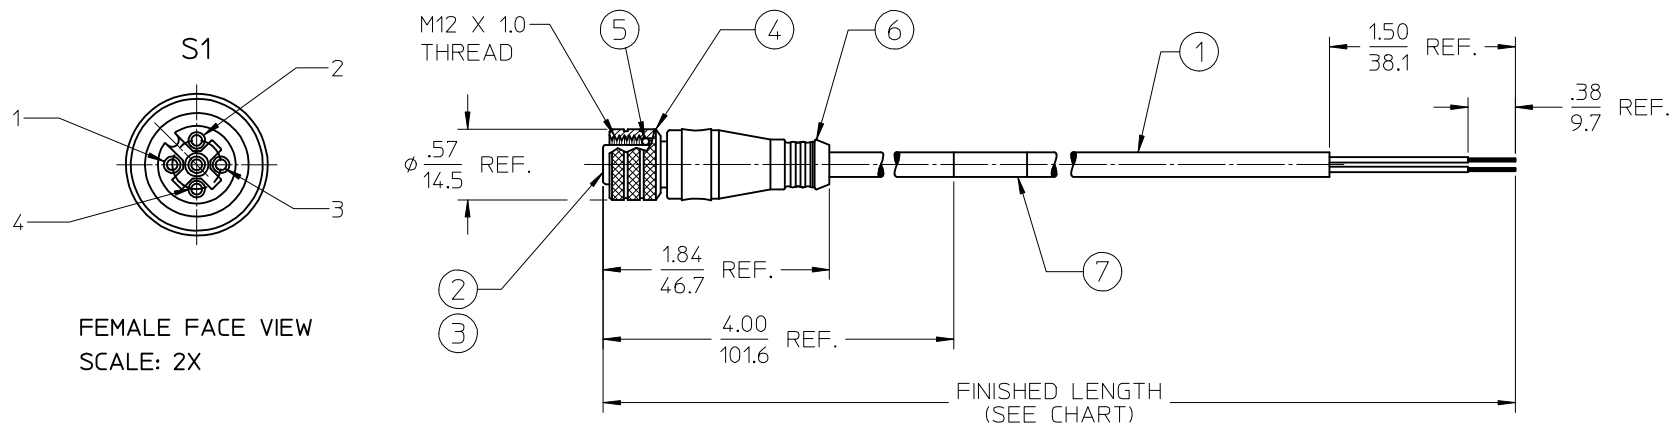

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. ELECTRICAL SPECIFICATIONS
VOLTAGE RATING: 250V AC/DC
CURRENT RATING: 4 AMPS
 4. PROTECTION: IP67
 5. ASSEMBLY IS RoHS COMPLIANT BY EXEMPTION

S1	
1	BROWN
2	WHITE
3	BLUE
4	BLACK

WIRING DIAGRAM

RELEASED AS SD DOC WAS RSD-120065-110 EC NO: IPG2013-1249					QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION						
7	1	WRAP LABEL	VINYL	BLACK/YELLOW		DESCRIPTION REV	mm	INCH	DRAWN BY	DATE	TITLE MIC CABLE ASSY, FEMALE 4 POLE , 22/4 PLTC							
6	1	OVERMOLD-FEMALE	PVC	GRAY			4 PLACES	± ---	± ---	RSTONE					2013/02/12			
5	1	O-RING	VITON	RED			3 PLACES	± ---	± ---	CHECKED BY	DATE	molex						
4	1	COUPLING, FEMALE THREAD	BRASS	NICKEL PLATED			2 PLACES	± ---	± .01	K JOZWIK	2013/02/27							
3	4	CONTACT SOCKET	Cu ALLOY	GOLD PLATED			1 PLACE	± 0.3	± ---	APPROVED BY	DATE	SD-120065-062						
2	1	INSERT, 4P FEMALE	PUR	BLACK			0 PLACE	± ---	± ---	JFMURPHY	2013/06/21							
1	1	CABLE, 22-4, 300V, 105°C, PLTC	PVC JACKET	GRAY			ANGULAR ± 2 °		MATERIAL NO.		DOCUMENT NO.					SHEET NO.		
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SIZE B					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		