
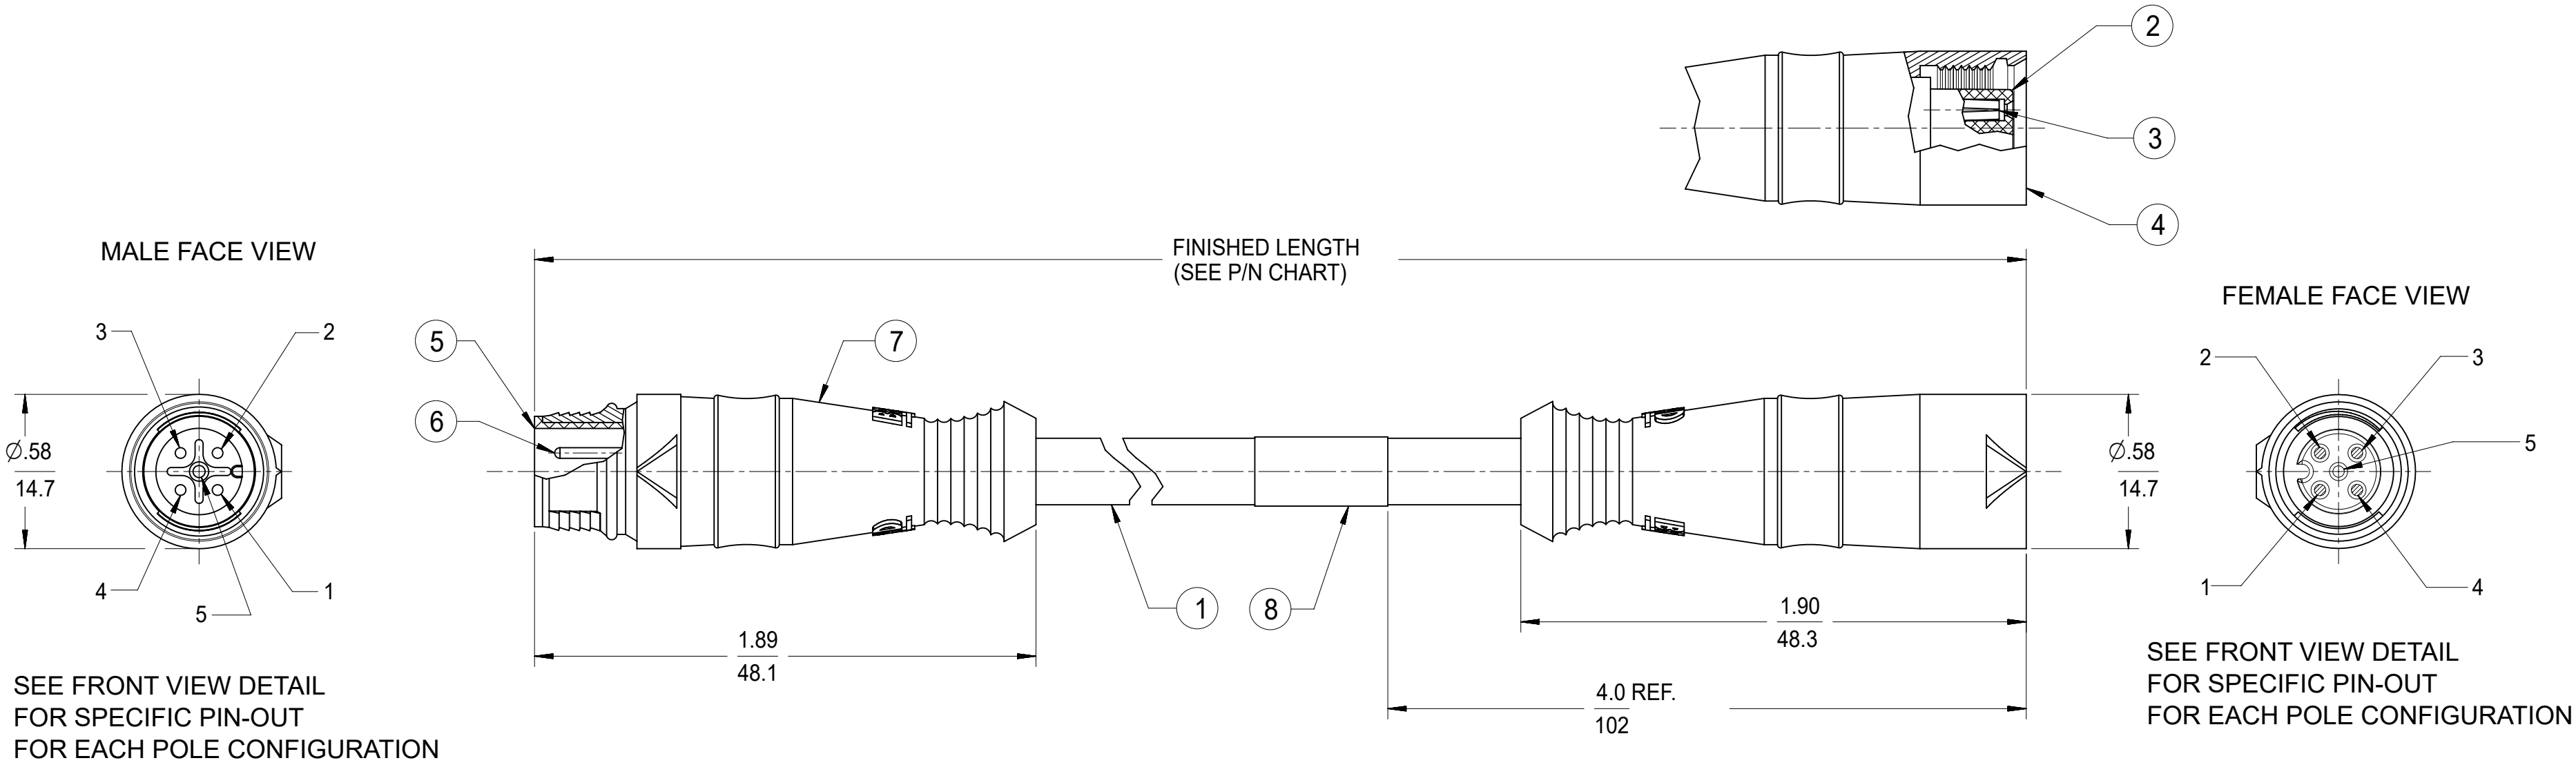


POLES	MATERIAL NO.	ENGINEERING NO.	FINISHED LENGTH
3	1200660029	NN3030A41M010G	3'3" +2.19"-0 (1M +55.6mm-0)
3	1200661997	NN3030A41M020G	6'7" +3.50"-0 (2M +88.9mm-0)
3	1200660030	NN3030A41M050G	16'5" +6.50"-0 (5M +165.1mm-0)
4	1200660035	NN4030A41M010G	3'3" +2.19"-0 (1M +55.6mm-0)
4	1200660036	NN4030A41M020G	6'7" +3.50"-0 (2M +88.9mm-0)
4	1200660037	NN4030A41M030G	9'10" +3.50"-0 (3M +88.9mm-0)
4	1200660038	NN4030A41M040G	13'1" +6.50"-0 (4M +165.1mm-0)
4	1200660039	NN4030A41M050G	16'5" +6.50"-0 (5M +165.1mm-0)

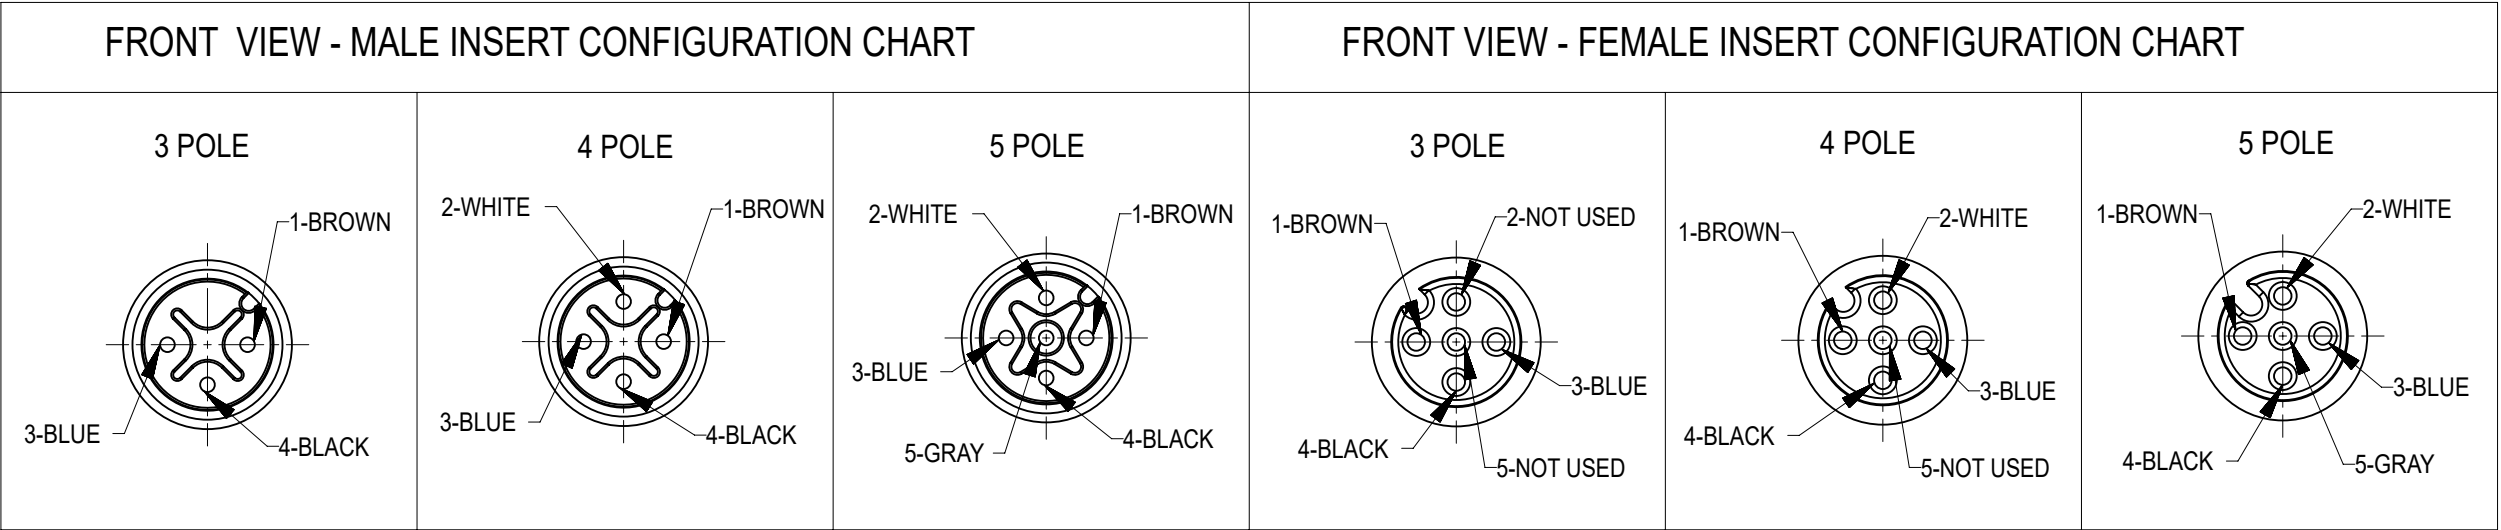

NOTES:
1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. ELECTRICAL SPECIFICATIONS
VOLTAGE RATING: 250V AC/DC
CURRENT RATING: 4 AMPS
4. XX REFERS TO NUMBER OF CIRCUITS

CABLE P/N MATRIX

NNX030A41MXXXG

DOUBLE ENDED CORDSET

NUMBER OF POLES

CONNECTOR STYLE (MALE/FEM STRAIGHT)

CABLE TYPE (22 AWG BLACK PVC)

FINISHED LENGTH
M00X= .1X METER
M010= 1X METER
M100= 10X METERS

BLACK OVERMOLD

8	1	WRAP LABEL	VINYL	BLACK/YELLOW
7	1	MICRO-PUSH OVERMOLD (MALE)	TPE	BLACK
6	XX	CONTACT PIN	Cu ALLOY	GOLD PLATED
5	1	INSERT (MALE)	NYLON	BLACK
4	1	MICRO-PUSH OVERMOLD (FEMALE)	PVC	BLACK
3	XX	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
2	1	INSERT (FEMALE)	NYLON	BLACK
1	A/R	CABLE, 22 AWG, UN SHLD	PVC JACKET	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH