


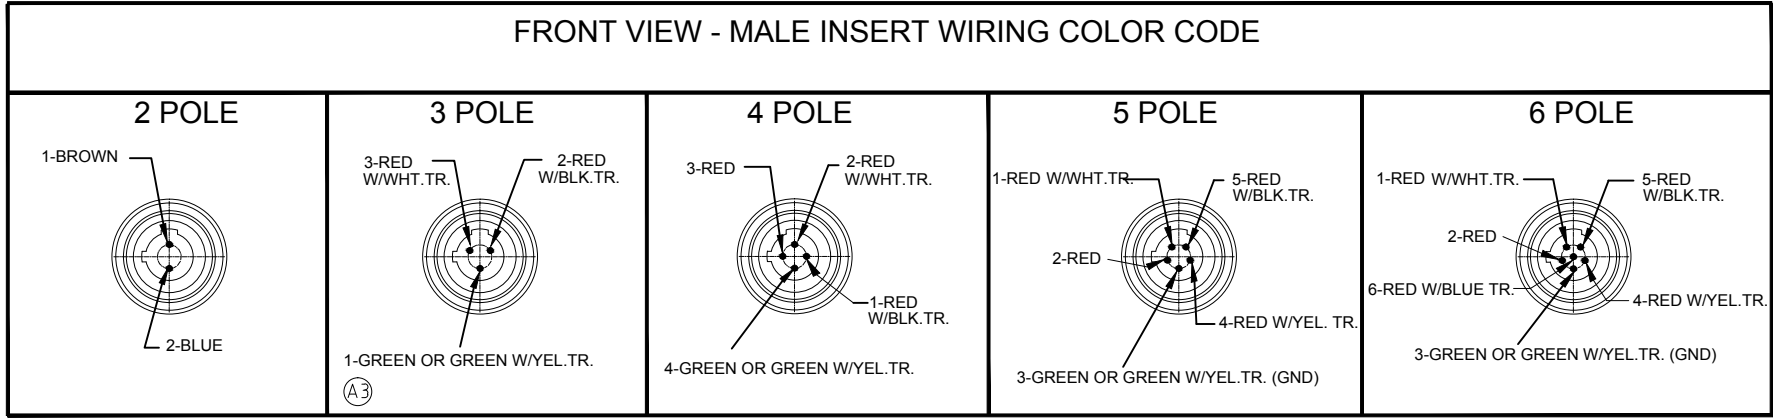


70X006A03FXXX

POLES

3
4
5
6

LENGTH

F010 - 1 FT
F050 - 5 FT
F100 - 10 FT

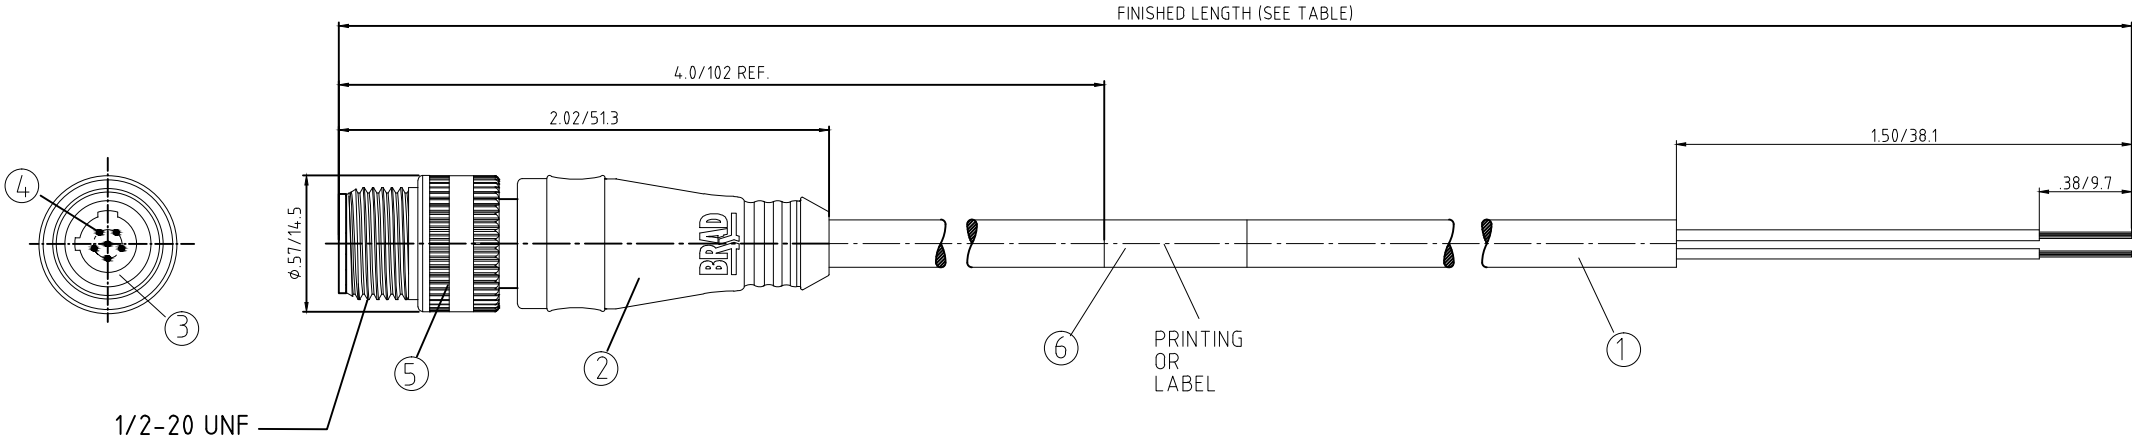

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200720292	703006A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200720435	704006A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200720546	705006A03F060	6.00' +3.50" -0 [1.8M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
6	120072XXXX	706006A03FXXX	---

ITEM	COMPONENT	MATERIAL	FINISH
6	LABLE	MYLAR	BLACK/YELLOW
5	COUPLING NUT	ZINC DIE CAST/ BRASS	BLACK E-COATED/ NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE- 18 AWG (41x#34 COPPER STRANDING) 2-6 CONDUCTORS 300V	PVC	YELLOW

CONNECTOR SPECIFICATION:	
VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL LISTED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED,FILE NO. LR6837

CORRECTED 3P PINOUT

EC NO.:IPG2019-0062

8/8/18

DRWN.:RSTONE

2018/08/10

CHKD.: C CHRAST

2010/03/09

APPR.:BWOODMAN

REV

DESCRIPTION

QUALITY SYMBOLS

▽

= 0

▽

= 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±.01
1 PLACE	±0.3	±---
ANGULAR ± --- °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE

IN/MM

DRAWN BY	DATE
LSTEMMLE	2010/02/08
CHECKED BY	DATE
FP	2010/03/09
APPROVED BY	DATE
FPACHER	2010/03/09

MATERIAL NO.	SEE P/N TABLES
SIZE	A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE

1:1

DESIGN UNITS

METRIC

THIRD ANGLE PROJECTION

MICRO-CHANGE CORDSET

2-6P DUAL KEYWAY MA STR

#18/2-6 YELLOW PVC CABLE

molex

MOLEX INCORPORATED

DOCUMENT NO.	SD-120072-016	SHEET NO.	1 OF 1
--------------	---------------	-----------	--------