
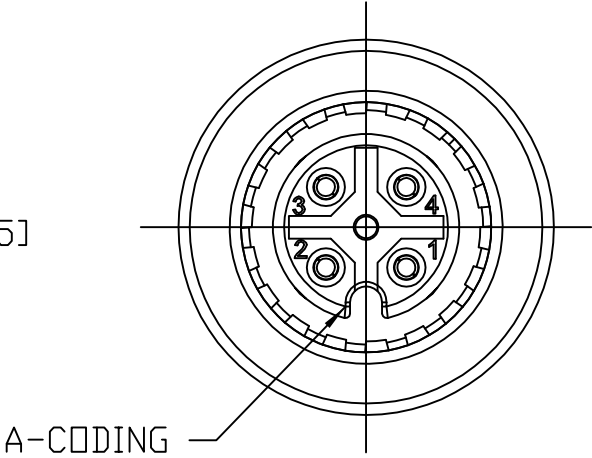
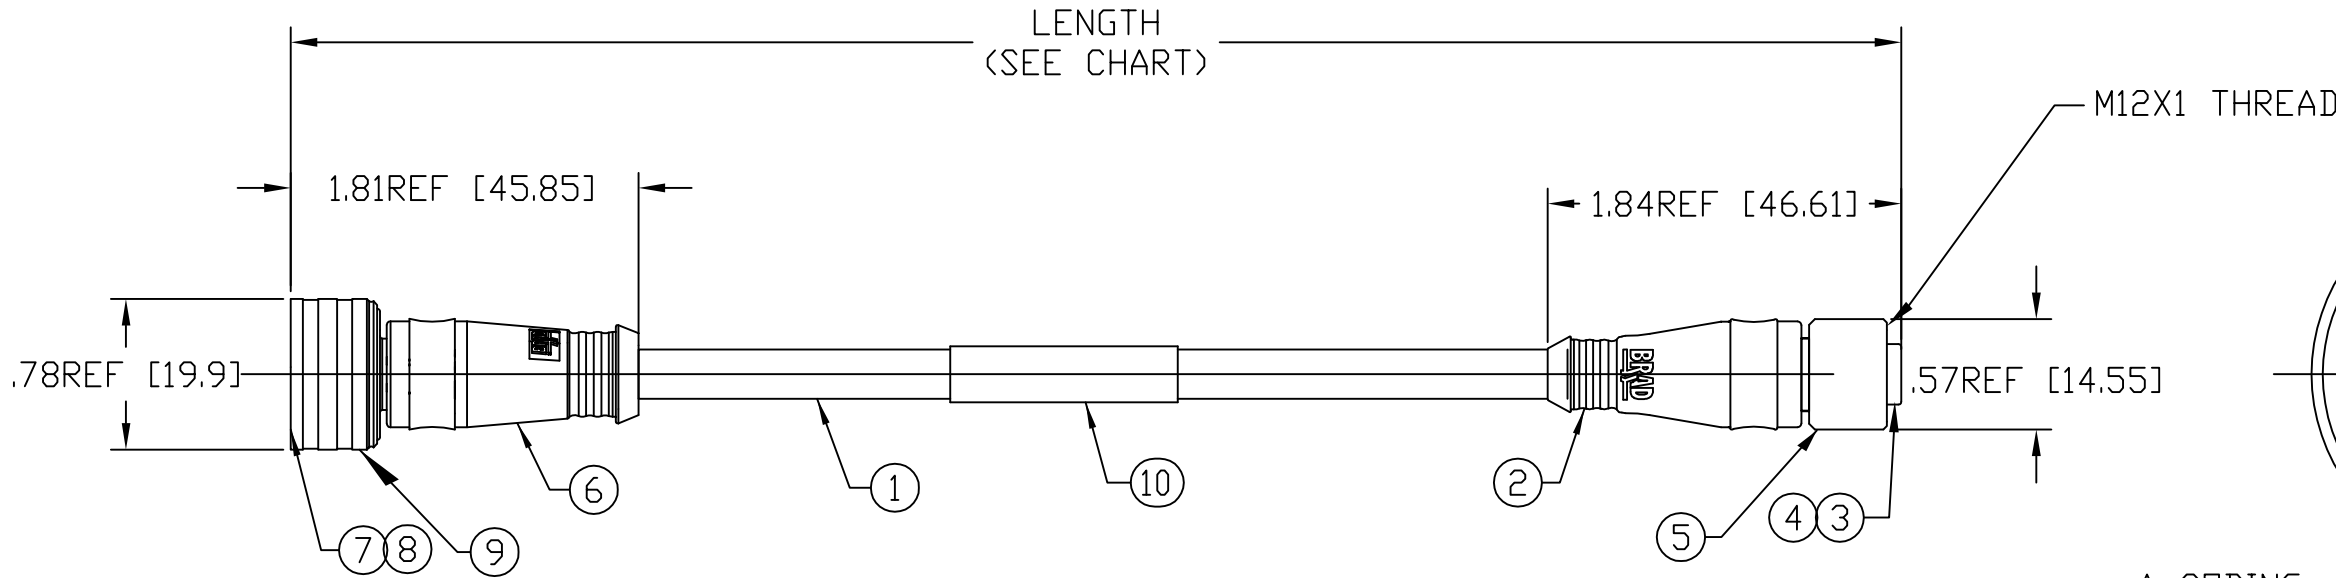
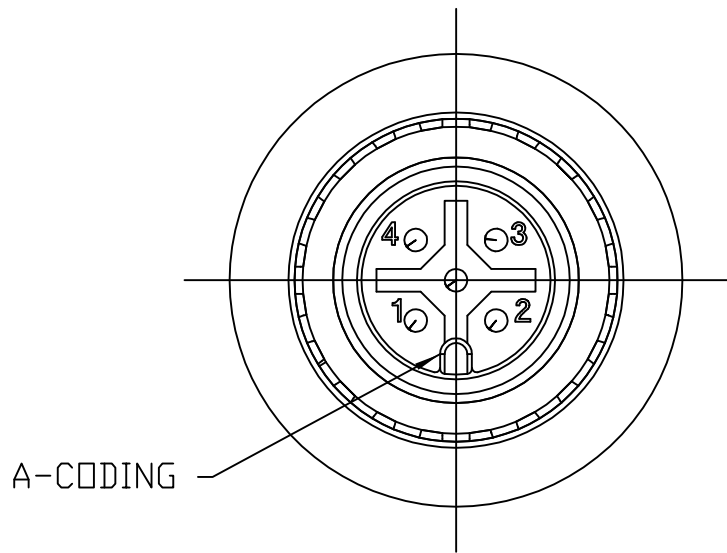


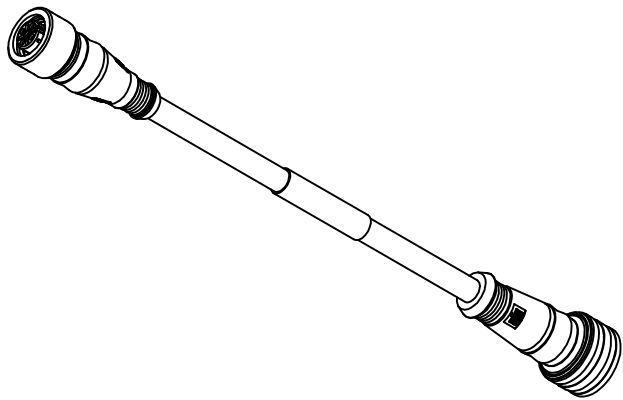

NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE.
- 4) MATES WITH: MICRO CHANGE, 4 POLE RECEPTACLE
- 5) ELECTRICAL DATA:
INLINE CORDSET
MALE A-CODING TO FEMALE A-CODING
22AWG UNSHIELDED
POLES: 4
MAX. VOLTAGE: 250V
MAX. CURRENT 4A
CONTACT RESISTANCE: <5M Ohm
PROTECTION IP67/68/69K
TEMPERATURE RANGE: -25°C TO 90°C
- 6) PACKAGING:
CABLE ASSEMBLIES ARE BAGGED SEPERATELY
IN POLY BAGS WITH BAR CODE LABEL ATTACHED
TO OUTSIDE OF BAG.
- 7)ASSEMBLY IS RoHS COMPLIANT.
- 8)CERTIFICATION
cCSAus

P1		P2
1	BROWN	1
2	WHITE	2
3	BLUE	3
4	BLACK	4

WIRING DIAGRAM

10	1	LABEL	PLASTIC FILM	BLACK/YELLOW
9	1	MALE COUPLING NUT	BRASS	NICKEL PLATED
8	4	PIN CONTACT	COPPER ALLOY	GOLD PLATED
7	1	MALE INSERT	PUR	BLACK
6	1	MALE OVERMOLD	RITEFLEX	YELLOW
5	1	FEMALE COUPLING NUT	BRASS	NICKEL PLATED
4	4	SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
3	1	FEMALE INSERT	PUR	BLACK
2	1	FEMALE OVERMOLD	RITEFLEX	YELLOW
1	1	CABLE, 22AWG-4	TPE JACKET	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASE EC NO: WEU2010-0003 DRWN: TWOLDEGE 7/7/09 CHKD: BWOODMAN APPR: JFMURPHY 2009/07/20 A	DESCRIPTION REV	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY TWOLDEGE	DATE 2009/07/07	TITLE MICRO CHANGE ASSEMBLY 4-P M/FE ST/ST ULOCK/M12 22/4AWG TPE					
			4 PLACES	±----	±---	CHECKED BY BWOODMAN	DATE 2009/07/07						
			3 PLACES	±.005	±.005	APPROVED BY		DATE	molex	MOLEX INCORPORATED			
			2 PLACES	±.013	±.010	-----		-----					
			1 PLACE	±.025	±.020	MATERIAL NO. SEE CHANRT					DOCUMENT NO. SD-120080-005	SHEET NO. 1 OF 1	
			ANGULAR ±---°			SIZE C					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS													