

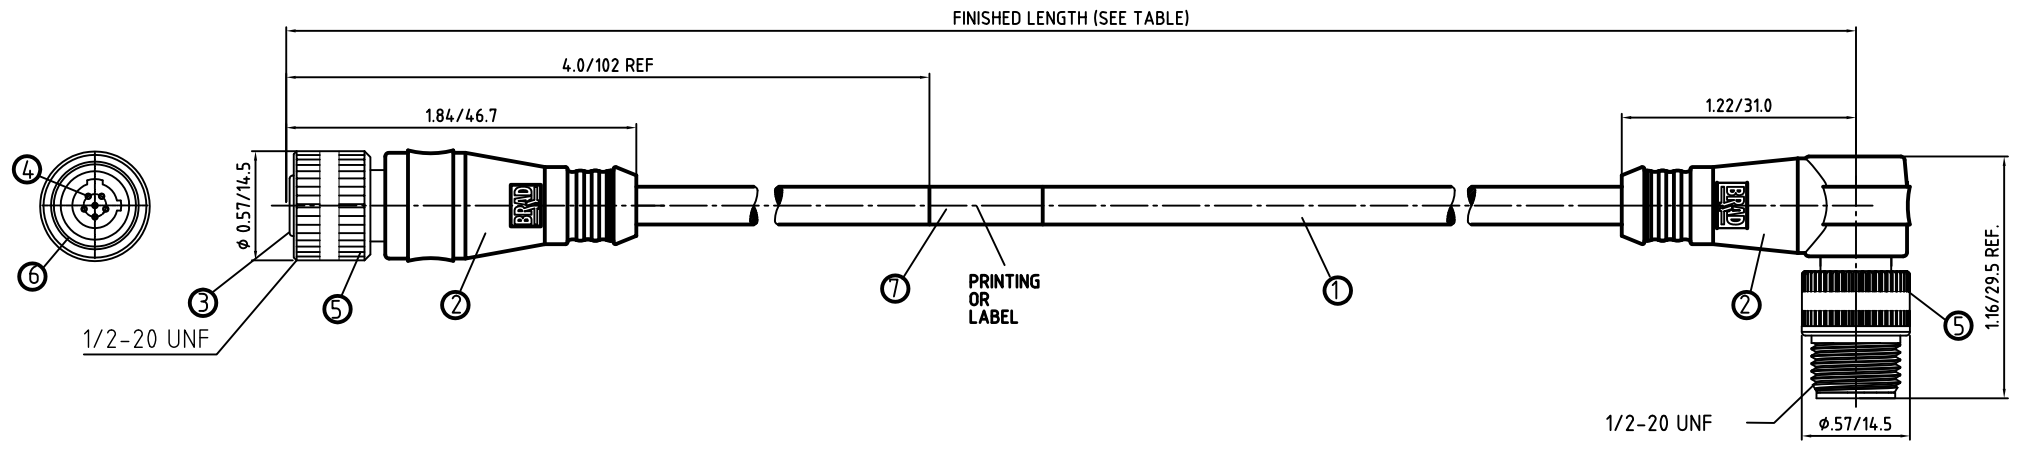


FRONT VIEW - FEMALE INSERT WIRING COLOR CODE

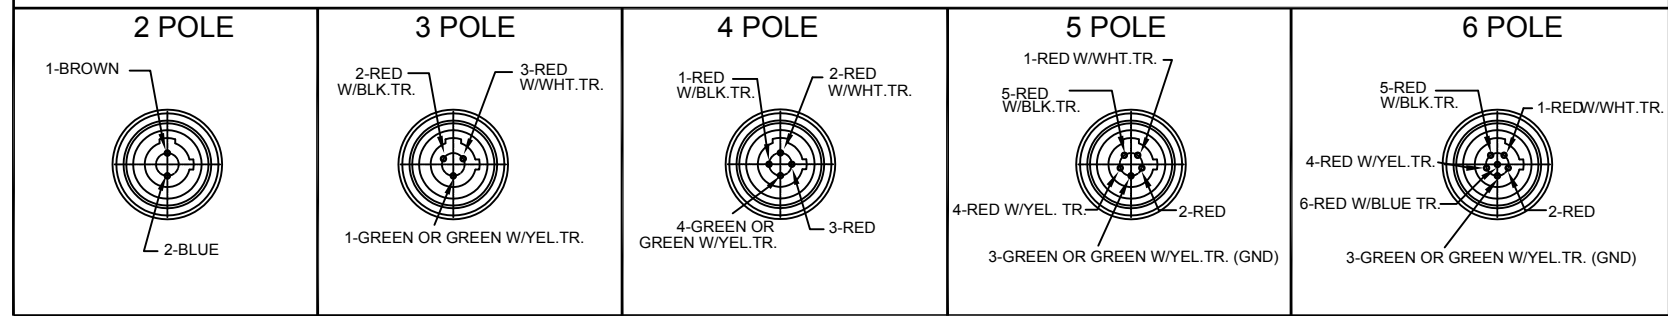

FRONT VIEW - MALE INSERT WIRING COLOR CODE

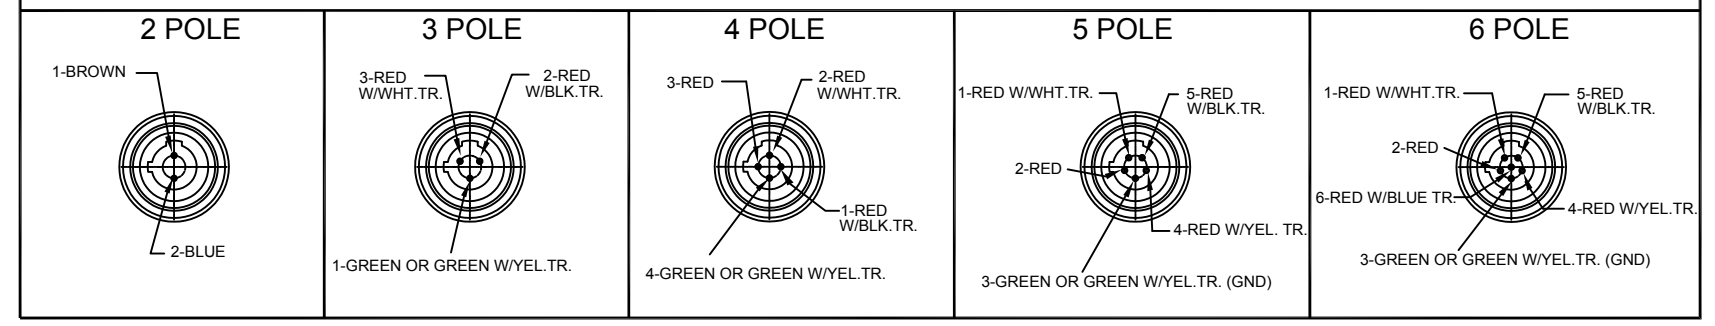

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL LISTED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED,FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	NITRILE	RED
5	COUPLER	ZINC DIE CAST/ BRASS	BLACK E-COATED/ NICKEL PLATED
4	PINCONTACT/ CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE- 22 AWG (26x#36 COPPER STRANDING) 6 CONDUCTORS BRAID SHIELD 300V	PVC	YELLOW

DESCRIPTION EC NO: WEU2010-0417 DRWN: LSTEMMLE CHKD: NS APPR: FPACHER 08.03.10 2010/03/10	QUALITY SYMBOLS = 0 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/02/10	MICRO-CHANGE FE STR/M 90 2-6 P. DUAL KEYWAY BRAID SHIELD PVC CABLE			
		4 PLACES	±---	±---	CHECKED BY FP	DATE 2010/03/09				
		3 PLACES	±---	±---	APPROVED BY FPACHER	DATE 2010/03/09	molex MOLEX INCORPORATED			
		2 PLACES	±---	±.01	MATERIAL NO. SEE TABLE SHEET 2	DOCUMENT NO. SD-120073-003				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10

9

8

7

6

5

4

3

2

1


POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
2	1200735010	772032D02F030	3.00' +2.19" -0 [.9M +55.6 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200730178	773032D02F030	3.00' +2.19" -0 [.9M +55.6 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200730250	774032D02F030	3.00' +2.19" -0 [.9M +55.6 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200735013	775032D02F030	3.00' +2.19" -0 [.9M +55.6 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
6	1200730577	776032D02F030	3.00' +2.19" -0 [.9M +55.6 -0]

DESCRIPTION EC NO: WEU2010-0417 DRWN: LSTEMMLE CHKD: NS APPR: FPACHER 08.03.10 2010/03/10	DESCRIPTION REV	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY DATE LSTEMMLE 2010/02/10		MICRO-CHANGE FE STR/M 90 2-6 P. DUAL KEYWAY BRAID SHIELD PVC CABLE  MOLEX INCORPORATED					
			4 PLACES	±---	±---	CHECKED BY DATE FP 2010/03/09							
			3 PLACES	±---	±---	APPROVED BY DATE FPACHER 2010/03/09							
			2 PLACES	±---	±.01	MATERIAL NO. SEE TABLE						DOCUMENT NO. SD-120073-003	SHEET NO. 2 OF 2
			1 PLACE	±0.3	±---								
			ANGULAR ± --- °										
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										
						SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						