



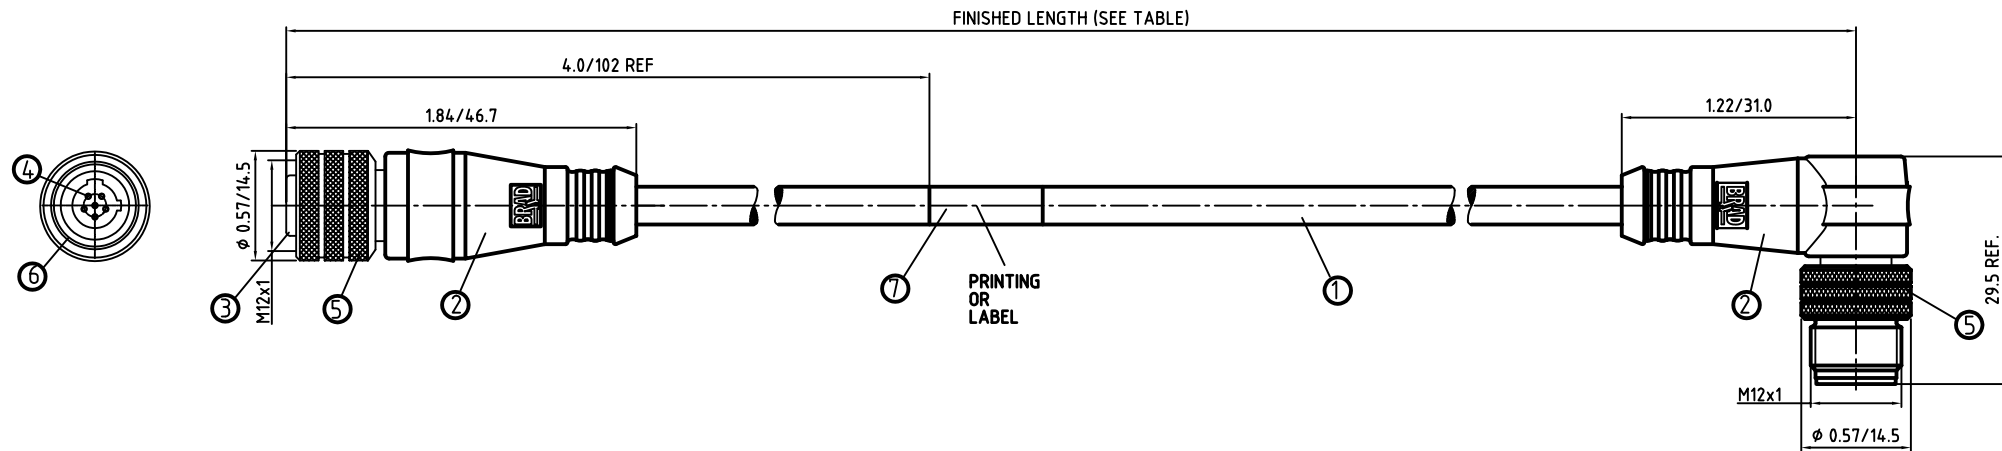


FRONT VIEW - FEMALE INSERT WIRING COLOR CODE
VISTA FRONTAL - INSERTO HEMBRA

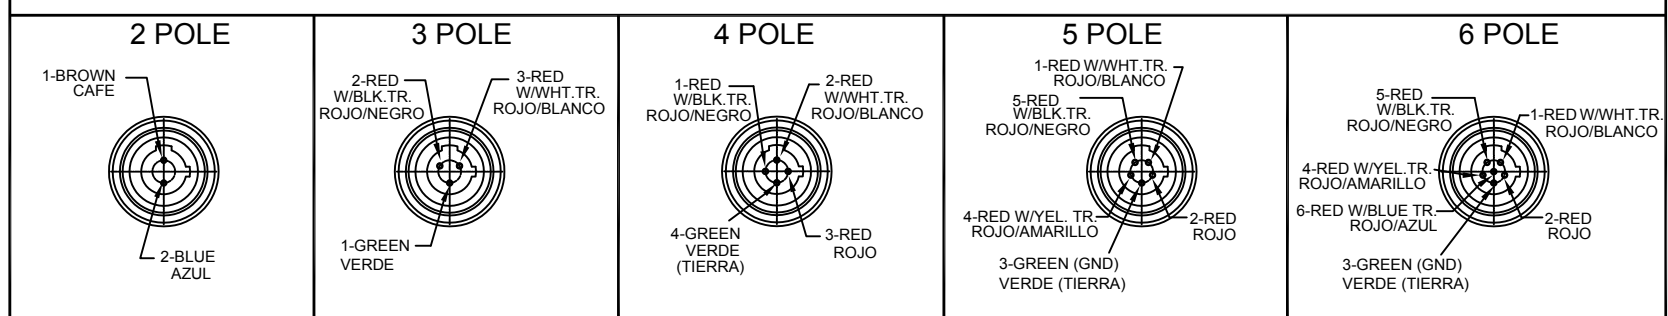

CONNECTOR SPECIFICATION:


VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL LISTED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED,FILE NO. LR6837

FRONT VIEW - MALE INSERT WIRING COLOR CODE
VISTA FRONTAL - INSERTO MACHO

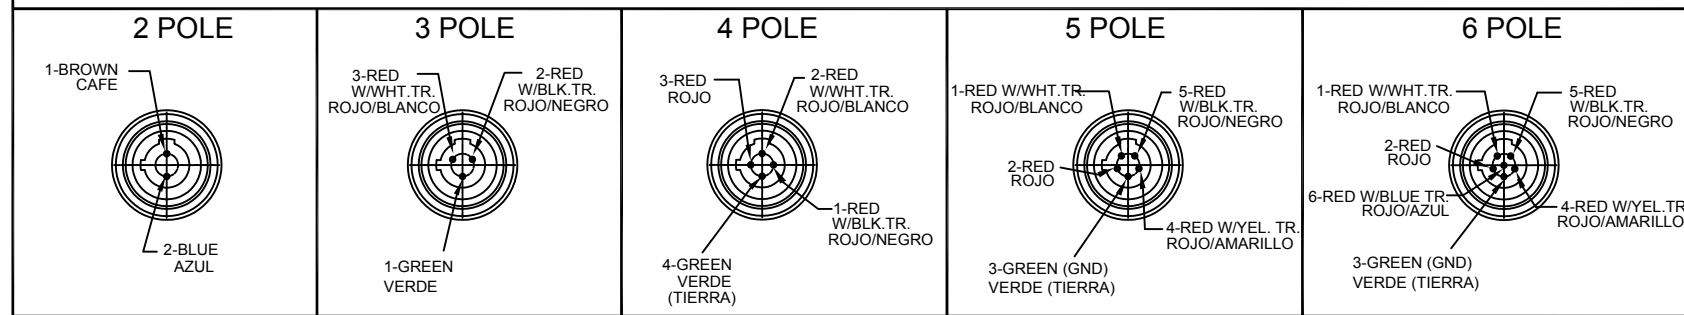

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	NITRILE	RED
5	COUPLING NUT	ZINC DIE CAST/ BRASS	BLACK E-COATED/ NICKEL PLATED
4	CONTACT SOCKET PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE- 18 AWG (41x#34 COPPER STRANDING) 2-6 CONDUCTORS 300V	PVC	YELLOW

DESCRIPTION EC NO: WEU2010-0417 DRWN: LSTEMMLE CHKD: NS APPR: FPACHER 08.03.10 2010/03/10	QUALITY SYMBOLS = 0 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/02/10	MICRO-CHANGE FE STR/M 90 2-6 P. DUAL KEYWAY 18/2-6P YELLOW PVC CABLE			
		4 PLACES	±---	±---	CHECKED BY FP	DATE 2010/03/09				
		3 PLACES	±---	±---	APPROVED BY FPACHER	DATE 2010/03/09				
		2 PLACES	±---	±.01	MATERIAL NO.		MOLEX INCORPORATED			
1 PLACE	±0.3	±---	DOCUMENT NO.							
ANGULAR ± --- °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE SHEET 2		SD-120073-007		SHEET NO. 1 OF 2		
SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

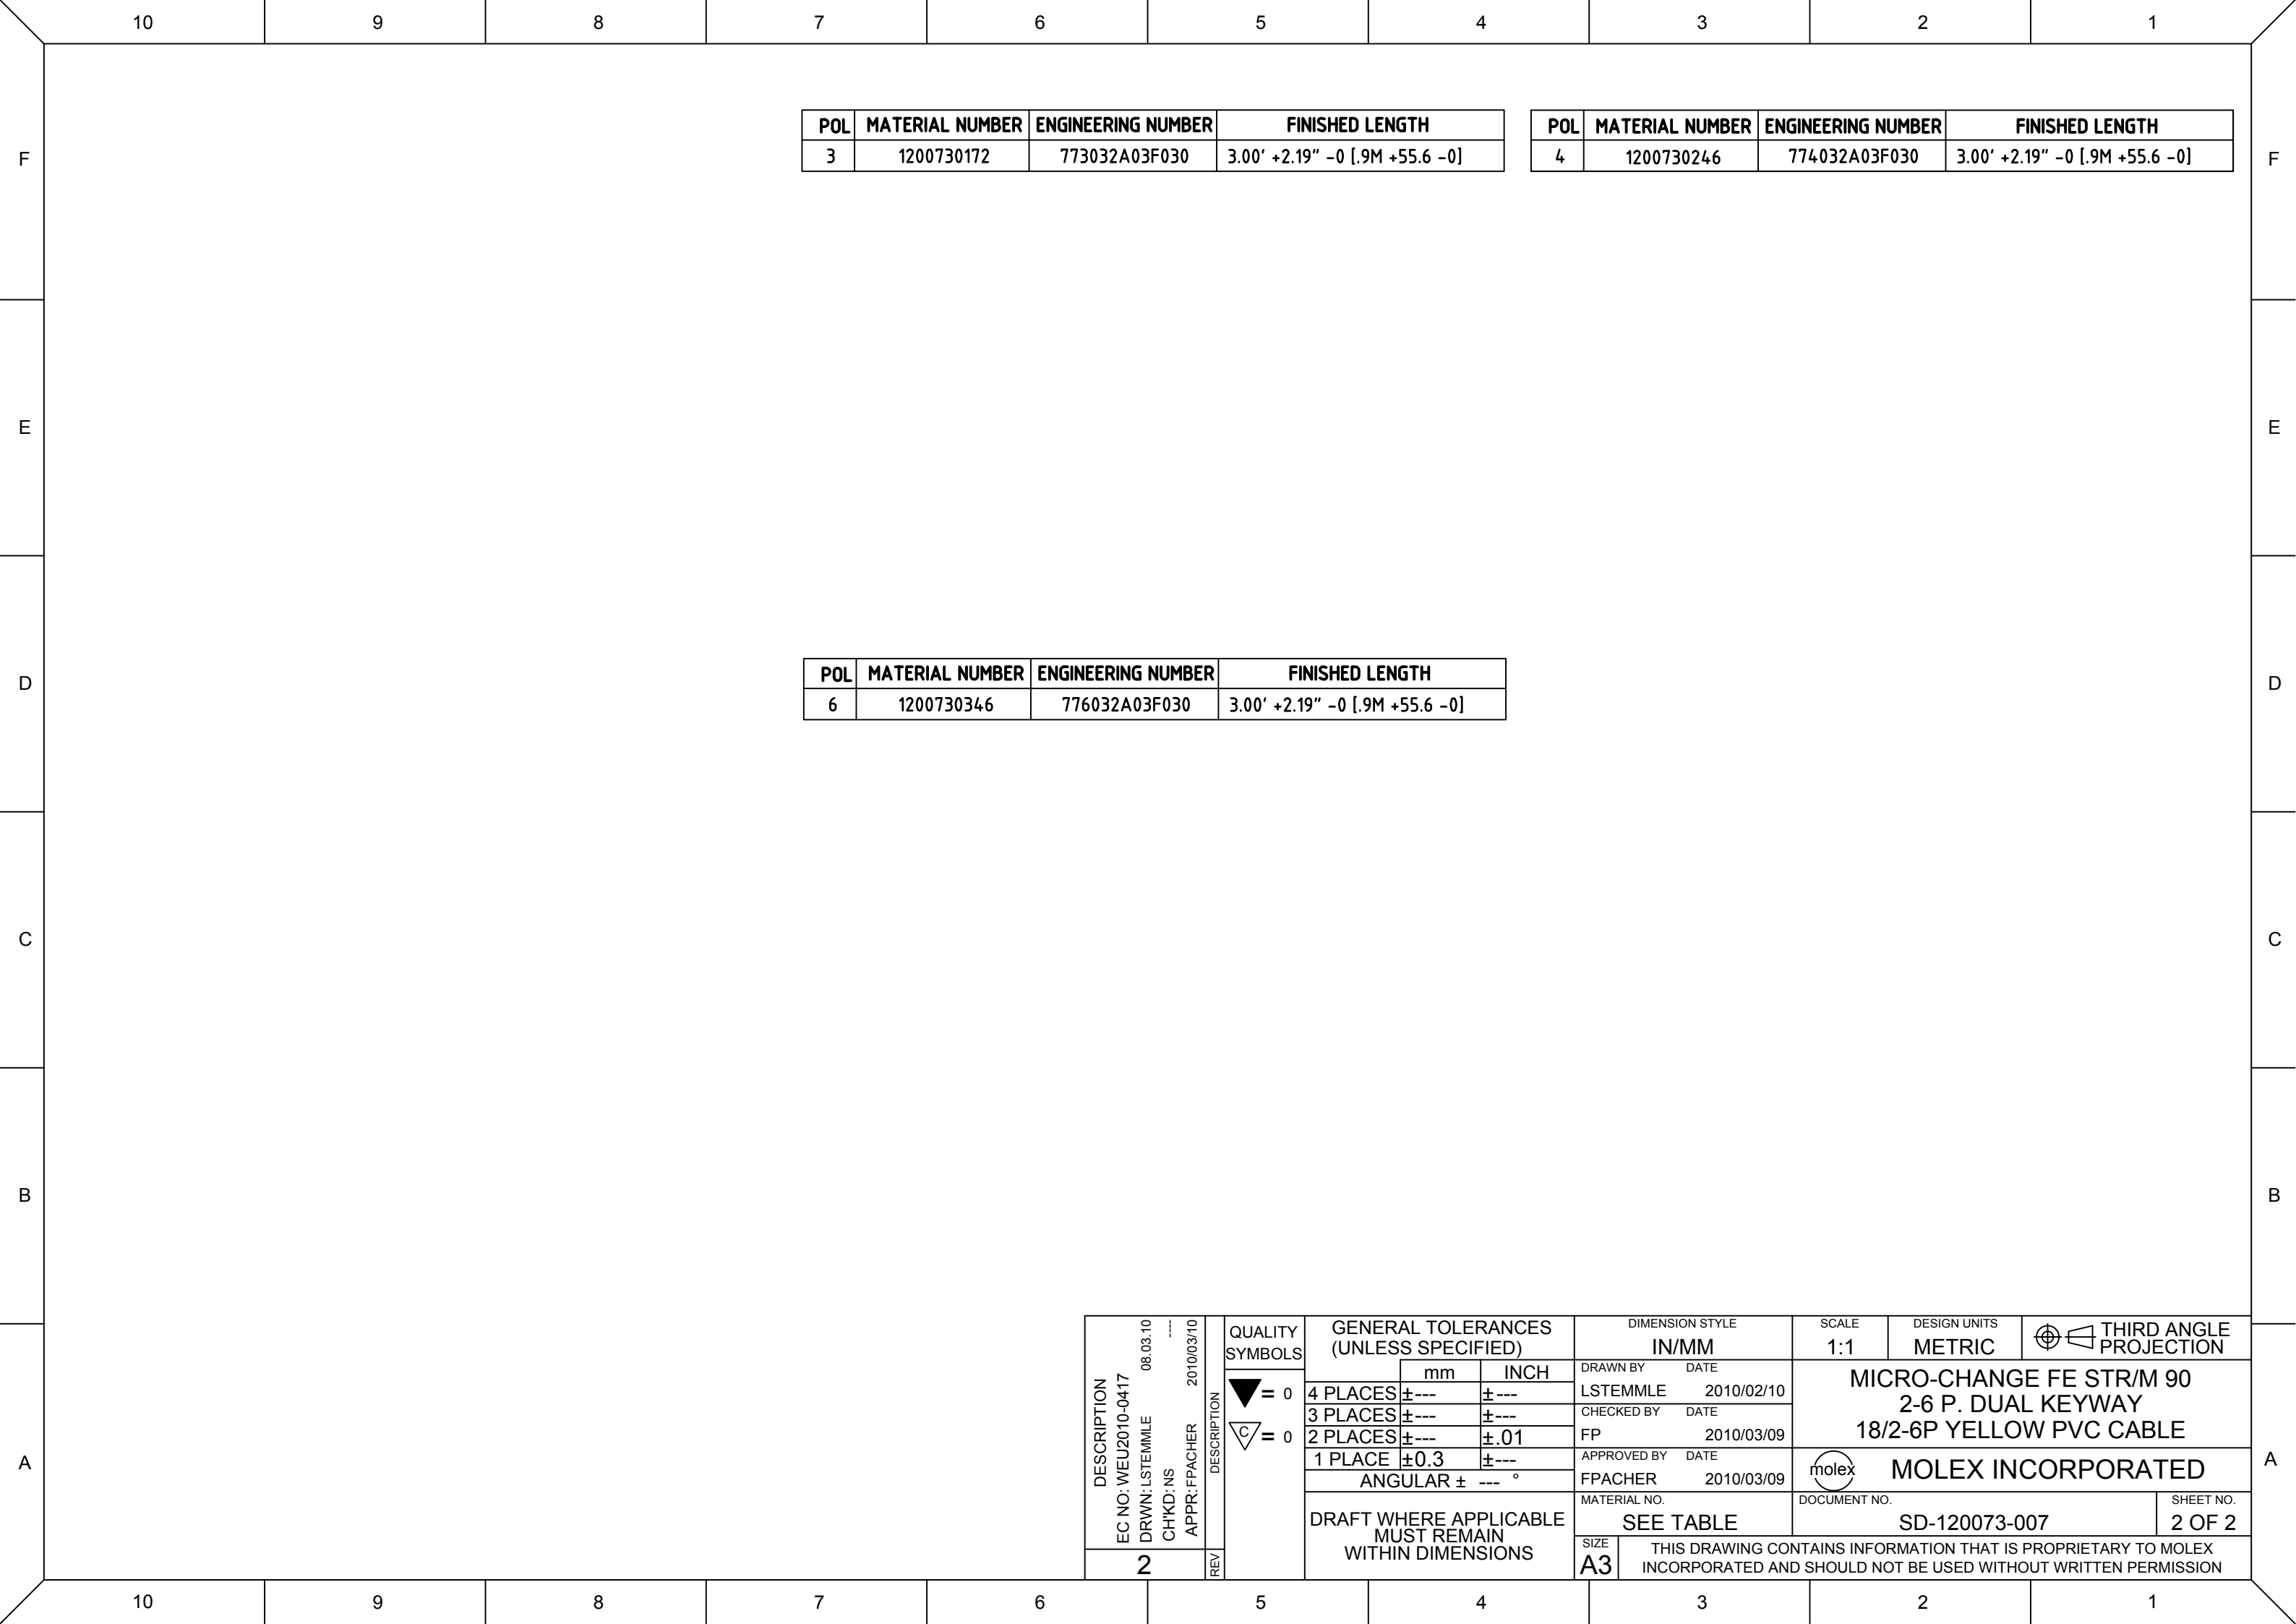

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200730172	773032A03F030	3.00' +2.19" -0 [.9M +55.6 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200730246	774032A03F030	3.00' +2.19" -0 [.9M +55.6 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
6	1200730346	776032A03F030	3.00' +2.19" -0 [.9M +55.6 -0]

DESCRIPTION EC NO: WEU2010-0417 08.03.10 DRWN: LSTEMMLE CH'KD: NS APPR: FPACHER 2010/03/10	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION		
		▽ = 0  = 0		mm	INCH	IN/MM		1:1	METRIC			
			4 PLACES	±---	±---	DRAWN BY	DATE	MICRO-CHANGE FE STR/M 90 2-6 P. DUAL KEYWAY 18/2-6P YELLOW PVC CABLE				
			3 PLACES	±---	±---	LSTEMMLE	2010/02/10					
			2 PLACES	±---	±.01	CHECKED BY	DATE					
			1 PLACE	±0.3	±---	FP	2010/03/09	 MOLEX INCORPORATED				
			ANGULAR ± --- °			APPROVED BY	DATE					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			FPACHER		2010/03/09	DOCUMENT NO. SD-120073-007			
						MATERIAL NO.						SHEET NO. 2 OF 2
						SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				