


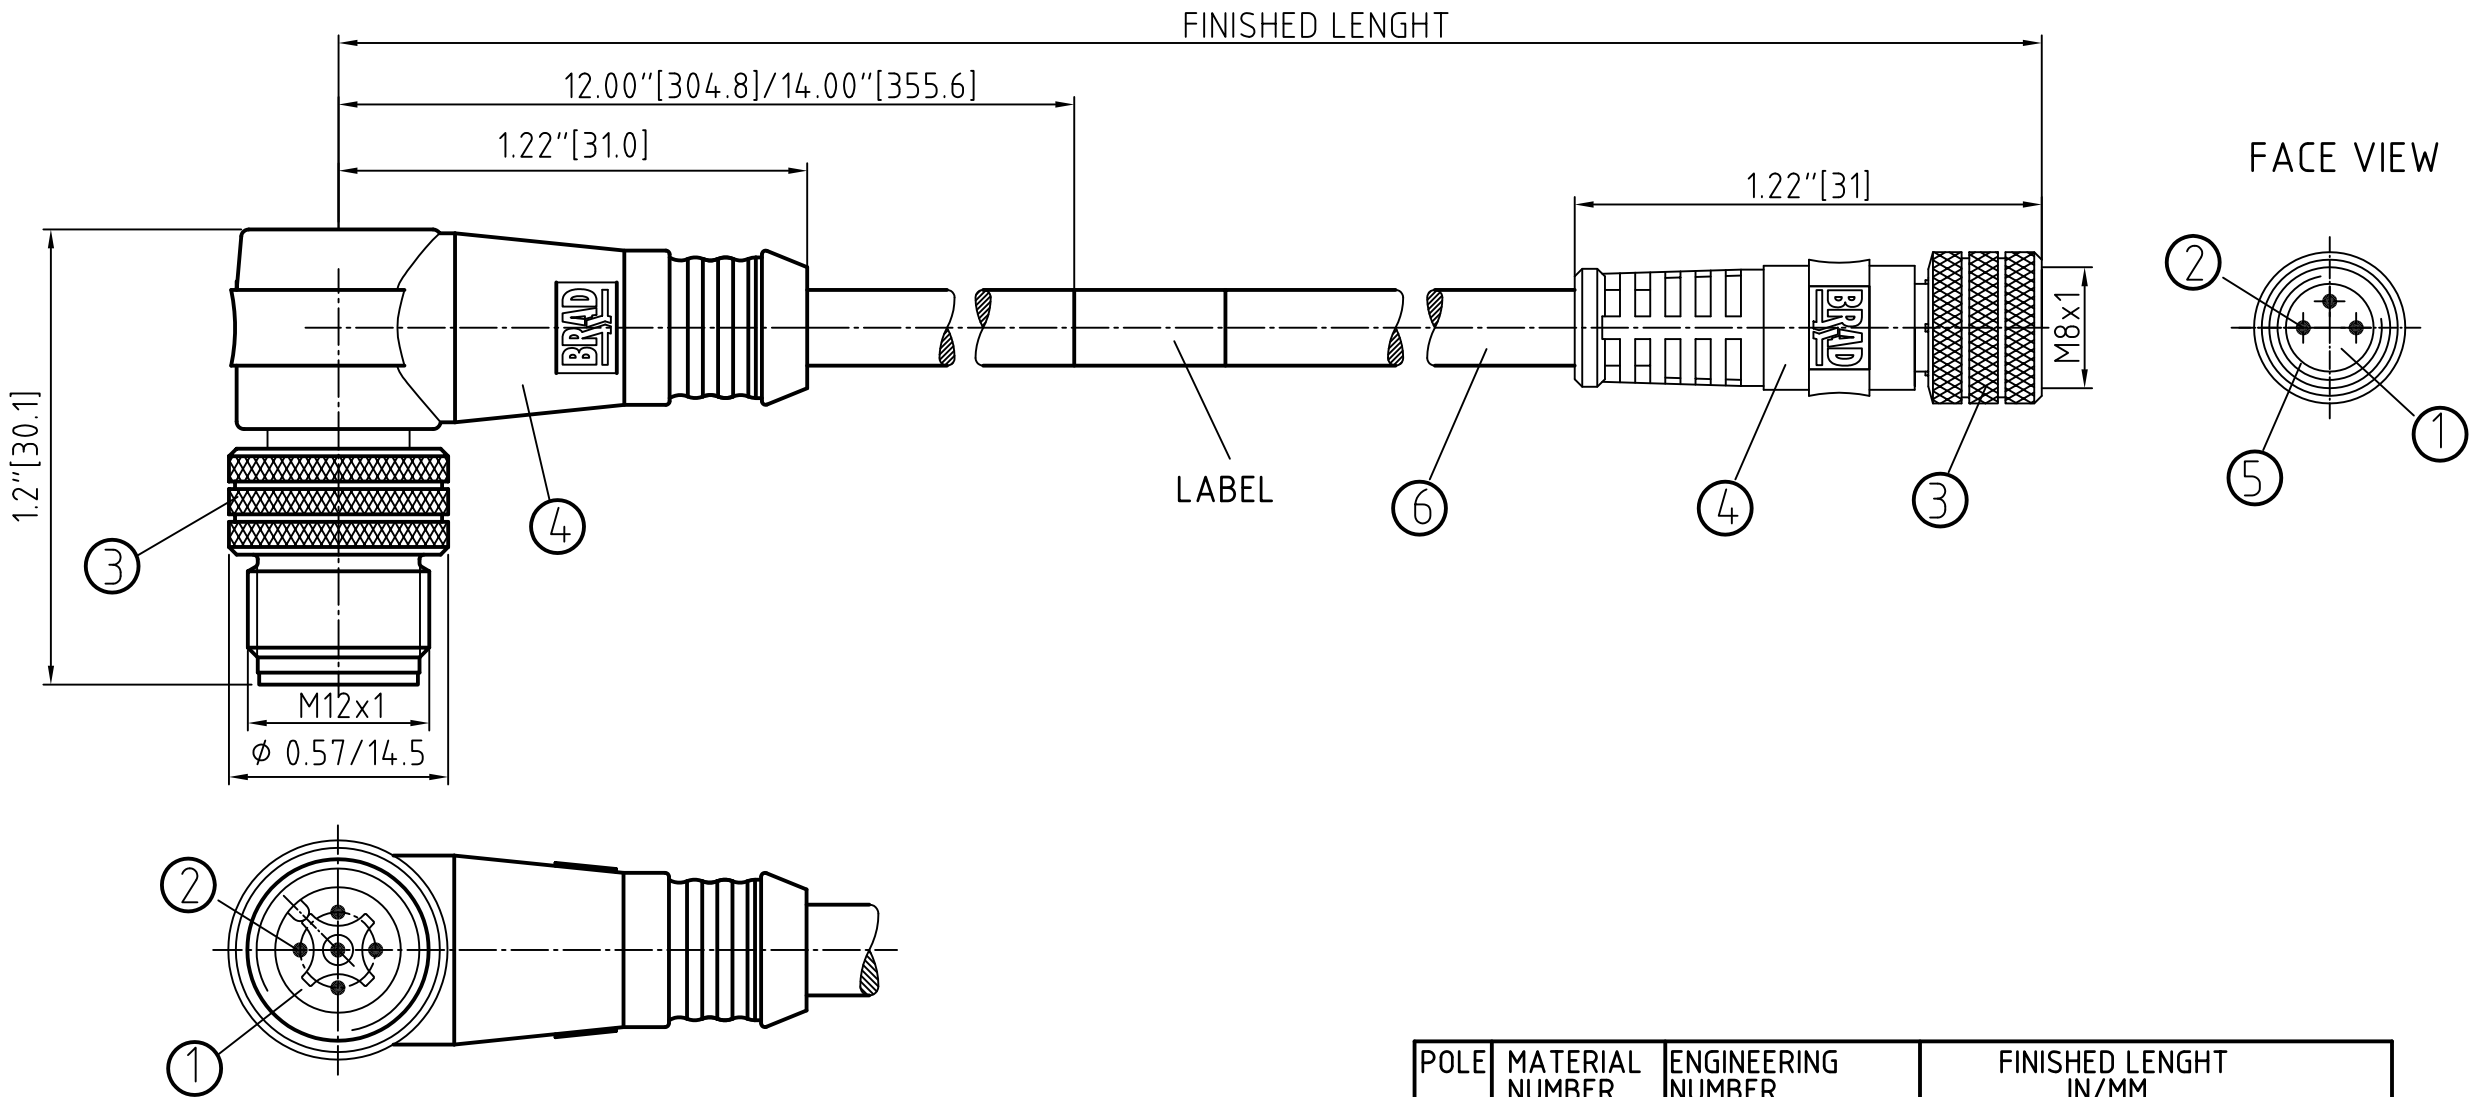

MALE FACE VIEW		FEMALE FACE VIEW	
3-POLE	4-POLE	3-POLE	4-POLE
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK

POLE	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGHT IN/MM
3	1200870670	483032A10M006	1.97' +1.75" -0 [0.6M +44.5 -0]
3	1200870343	483032A10M010	3.28' +2.19" -0 [1.0M +55.6 -0]
3	1200870346	483032A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]

CONNECTOR SPECIFICATION:	
VOLTAGE RATING	3-4POL:60V/AC 75V/DC
AMPERAGE RATING	3 AMPS
PROTECTION	IP68
OPERATING TEMPERATURE	-20°C TO +105°C
UL CERTIFICATIONS	UL listed, File #E152210
CSA CERTIFICATIONS	CSA CERTIFIED, File LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	POLYURETHANE (PUR)	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	COUPLING NUT	BRASS	NICKEL PLATED
4	OVERMOLD	TPE	YELLOW
5	O-RING (FEMALE)	VITON	
6	CABLE0.25mm ² /24AWG, (COPPER STRANDING) 3/4 CONDUCT. 300V	JACKET:PVC	YELLOW

DESCRIPTION EC NO: WEU2010-0326 DRWN: REISSNER CHKD: FP APPR: FPACHER	2010/02/03 2010/02/05	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
					IN/MM		2:1	METRIC				
				mm	INCH	DRAWN BY	DATE	NC/MIC 3/4P F/MM STR/90 AWG 24 PVC ----				
			4 PLACES	±---	±---	REISSNER	2010/02/03					
			3 PLACES	±---	±---	CHECKED BY	DATE	MOLEX INCORPORATED				
			2 PLACES	±---	±.01	FP	2010/02/03					
			1 PLACE	±0.3	±---	APPROVED BY	DATE	molex SD-120087-011				
			ANGULAR ± --- °			FPACHER	2010/02/05					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.	SHEET NO.			
						SEE TABLE		SD-120087-011		1		
1		REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						