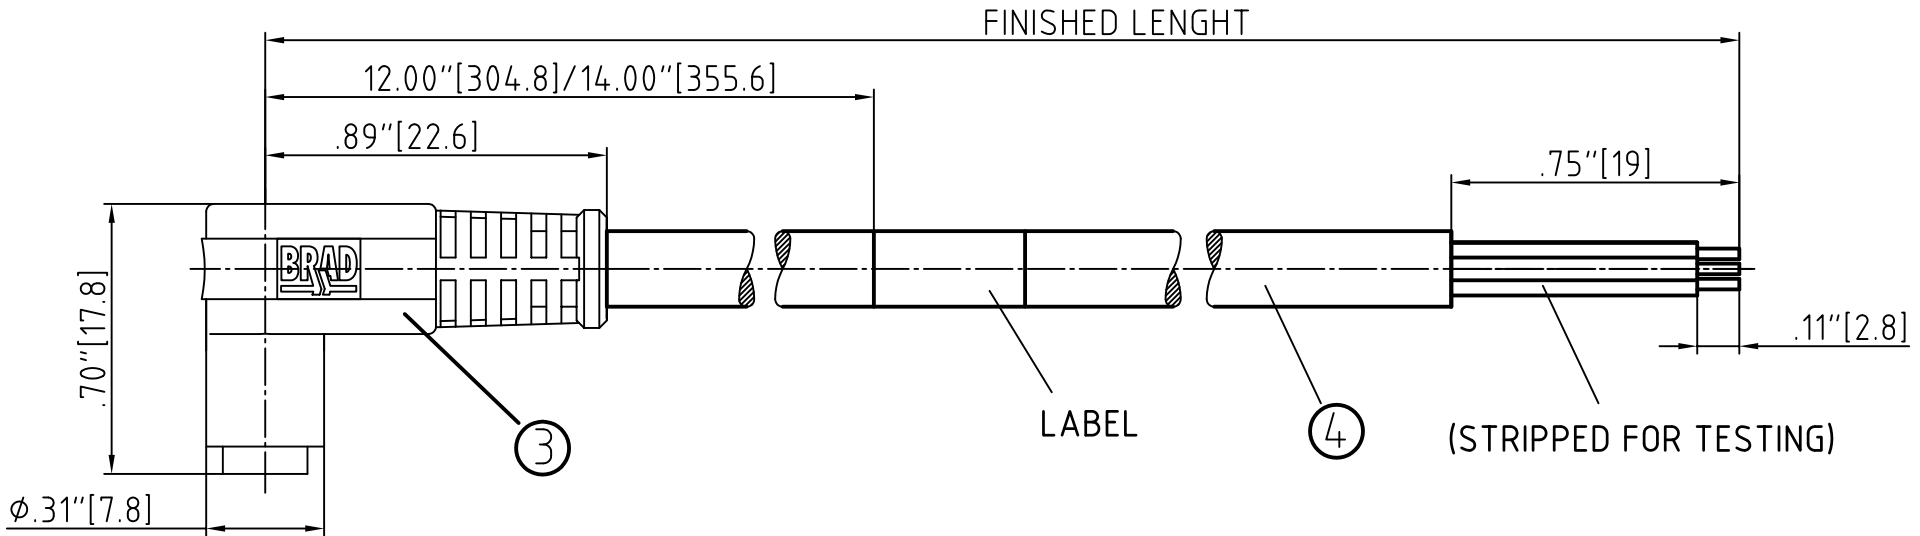


FEMALE FACE VIEW	
3-POLE	4-POLE
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK

POLE	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGHT IN/MM
3	1200880032	503001A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]
3	1200880034	503001A10M050	16.40' +6.50" -0 [5.0M +165.1 -0]
3	1200880036	503001A10M100	32.81' +12.50" -0 [10.0M +317.5 -0]
4	1200880054	504001A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]

CONNECTOR SPECIFICATION:	
VOLTAGE RATING	3-4POL:60V/AC 75V/DC
AMPERAGE RATING	3 AMPS
PROTECTION	IP65
OPERATING TEMPERATURE	-20°C TO +105°C
UL CERTIFICATIONS	UL listed, File #E152210
CSA CERTIFICATIONS	CSA CERTIFIED, File LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	POLYURETHANE (PUR)	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	OVERMOLD	TPE	YELLOW
4	CABLE- 24 AWG, (COPPER STRANDING) 3/4 CONDUCT. 300V	JACKET: PVC	YELLOW

DESCRIPTION EC NO: WEU2010-0300 DRWN: REISSNER 2010/01/25 CHKD: FP APPR: NSTAUDIG 2010/01/29	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IM/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY REISSNER	DATE 2010/01/25	NC 3/4P FE 90 SNAP 24AWG PVC ----			
		4 PLACES	±---	±---	CHECKED BY FP	DATE 2010/01/20				
		3 PLACES	±---	±---	APPROVED BY NSTAUDIG	DATE 2010/01/28	molex MOLEX INCORPORATED			
		2 PLACES	±---	±.01	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-120088-006				
		1 PLACE	±0.3	±---	SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
		ANGULAR ± --- °								
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								