PART NUMBER	ENGINEERING NO.	LENGTH
1300110051	227020A01F060	6' 0" +2.19 - 0 [1.8M +55.6 - 0]
1300110055	227020A01F120	12' 0" +3.50 - 0 [3.7M +88.9 - 0]
1300110057	227020A01F200	20' 0" +6.50 - 0 [6.1M +165.1 - 0]

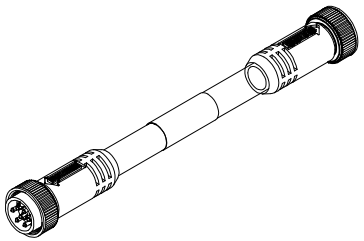

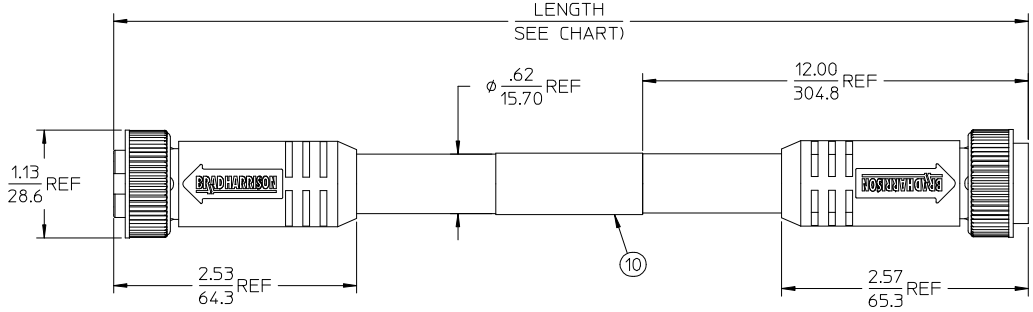



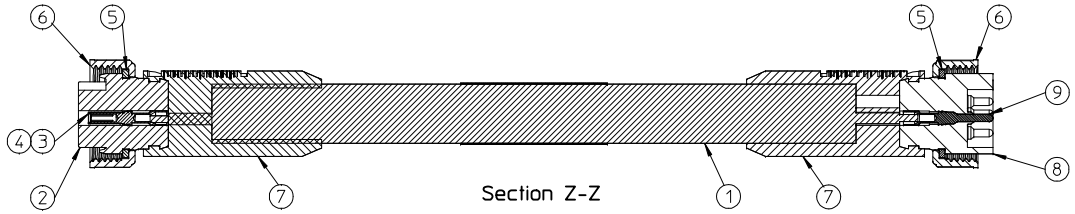



NOTES:
1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. CABLE ASSEMBLIES ARE BAGGED SEPERATELY
   IN POLY BAGS WITH BARCODE LABEL ATTACHED
   TO OUTSIDE OF BAG
4. WRAP LABEL IS MARKED WITH P/N, DATE CODE
   VOLTAGE & AMPERAGE
5. MATES WITH: MINI CHANGE, C-SIZE 7 POLE RECEPTACLE
6. ELECTRICAL SPECIFICATIONS:
   VOLTAGE RATING: 600V
   CURRENT RATING: 8 AMPS
7. ASSEMBLY IS RoHS COMPLIANT



WIRING DIAGRAM

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
10	1	LABEL	PLASTIC FILM	BLACK/YELLOW
9	7	PIN CONTACT	BRASS	GOLD PLATED
8	1	INSERT, MALE, 7 POLE	PVC	YELLOW
7	2	OVERMOLD	PVC	YELLOW
6	2	COUPLING NUT	ZINC DIE CAST	BLACK
5	2	FRICTION RING	NYLON	NATURAL
4	7	SOCKET CONTACT	BRASS	GOLD PLATED
3	7	SOCKET SLEEVE	STAINLESS STEEL	
2	1	INSERT, FEMALE, 7 POLE	PVC	YELLOW
1	1	CABLE, 16-7 STOOW/ST	PVC JACKET	YELLOW

RELEASED
EC NO: WNA2009-0813 2009/06/09
DRWN:BRUPERT
CHKD:BRUPERT
APPR:JFMURPHY 2009/06/10
DESCRIPTION
A
REV

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± .01
1 PLACE	± 0.3	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 1:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: BRUPERT DATE: 2009/04/06
CHECKED BY: B.WOODMAN DATE: 2009/04/06
APPROVED BY: J.MURPHY DATE: 2009/04/06

TITLE: MINI-CHANGE CORD ASSY MALE/FEMALE, B-SIZE 7 POLE

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-130011-002
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION