

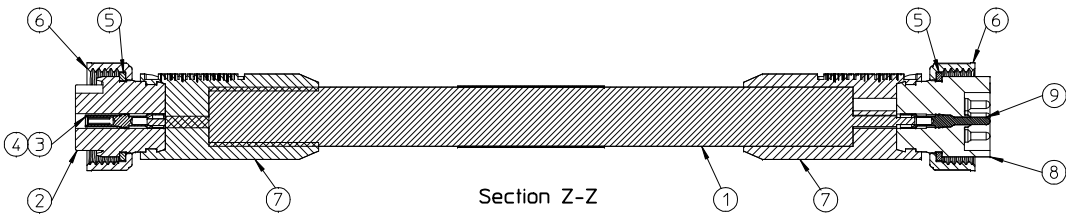



13	12	11	10	9	8	7	6	5	4	3	2	1
PART NUMBER	ENGINEERING NO.	LENGTH										
1300110051	227020A01F060	6' 0" +2.19 - 0 [1.8M +55.6 - 0]										
1300110055	227020A01F120	12' 0" +3.50 - 0 [3.7M +88.9 - 0]										
1300110057	227020A01F200	20' 0" +6.50 - 0 [6.1M +165.1 - 0]										

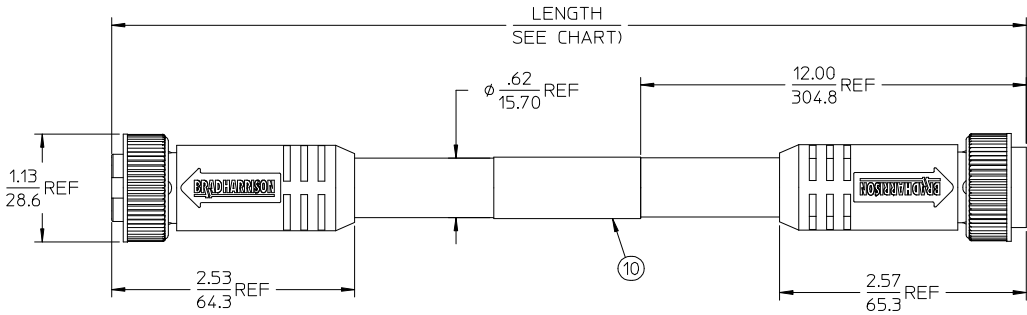

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 5. MATES WITH: MINI CHANGE, C-SIZE 7 POLE RECEPTACLE
 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 8 AMPS
 7. ASSEMBLY IS RoHS COMPLIANT

S2		P1
1	WHITE/BLACK	1
2	BLACK	2
3	WHITE	3
4	RED	4
5	ORANGE	5
6	BLUE	6
7	GREEN/YELLOW-GND	7

WIRING DIAGRAM

10	1	LABEL	PLASTIC FILM	BLACK/YELLOW
9	7	PIN CONTACT	BRASS	GOLD PLATED
8	1	INSERT, MALE, 7 POLE	PVC	YELLOW
7	2	OVERMOLD	PVC	YELLOW
6	2	COUPLING NUT	ZINC DIE CAST	BLACK
5	2	FRICITION RING	NYLON	NATURAL
4	7	SOCKET CONTACT	BRASS	GOLD PLATED
3	7	SOCKET SLEEVE	STAINLESS STEEL	
2	1	INSERT, FEMALE, 7 POLE	PVC	YELLOW
1	1	CABLE, 16-7 ST00W/ST	PVC JACKET	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: WNA2009-0813 DRWN:BRUPERT 2009/06/09 CHKD:BRUPERT APPR:J.MURPHY 2009/06/10	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		mm		INCH		DRAWN BY BRUPERT		DATE 2009/04/06	
		4 PLACES ± --- ± ---		3 PLACES ± --- ± ---		CHECKED BY B.WOODMAN		DATE 2009/04/06	
		2 PLACES ± --- ± .01		1 PLACE ± 0.3 ± ---		APPROVED BY J.MURPHY		DATE 2009/04/06	
		ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SD-130011-002		1 OF 1	