

F

E

D

C

B

A

F


E

D

C

B

A

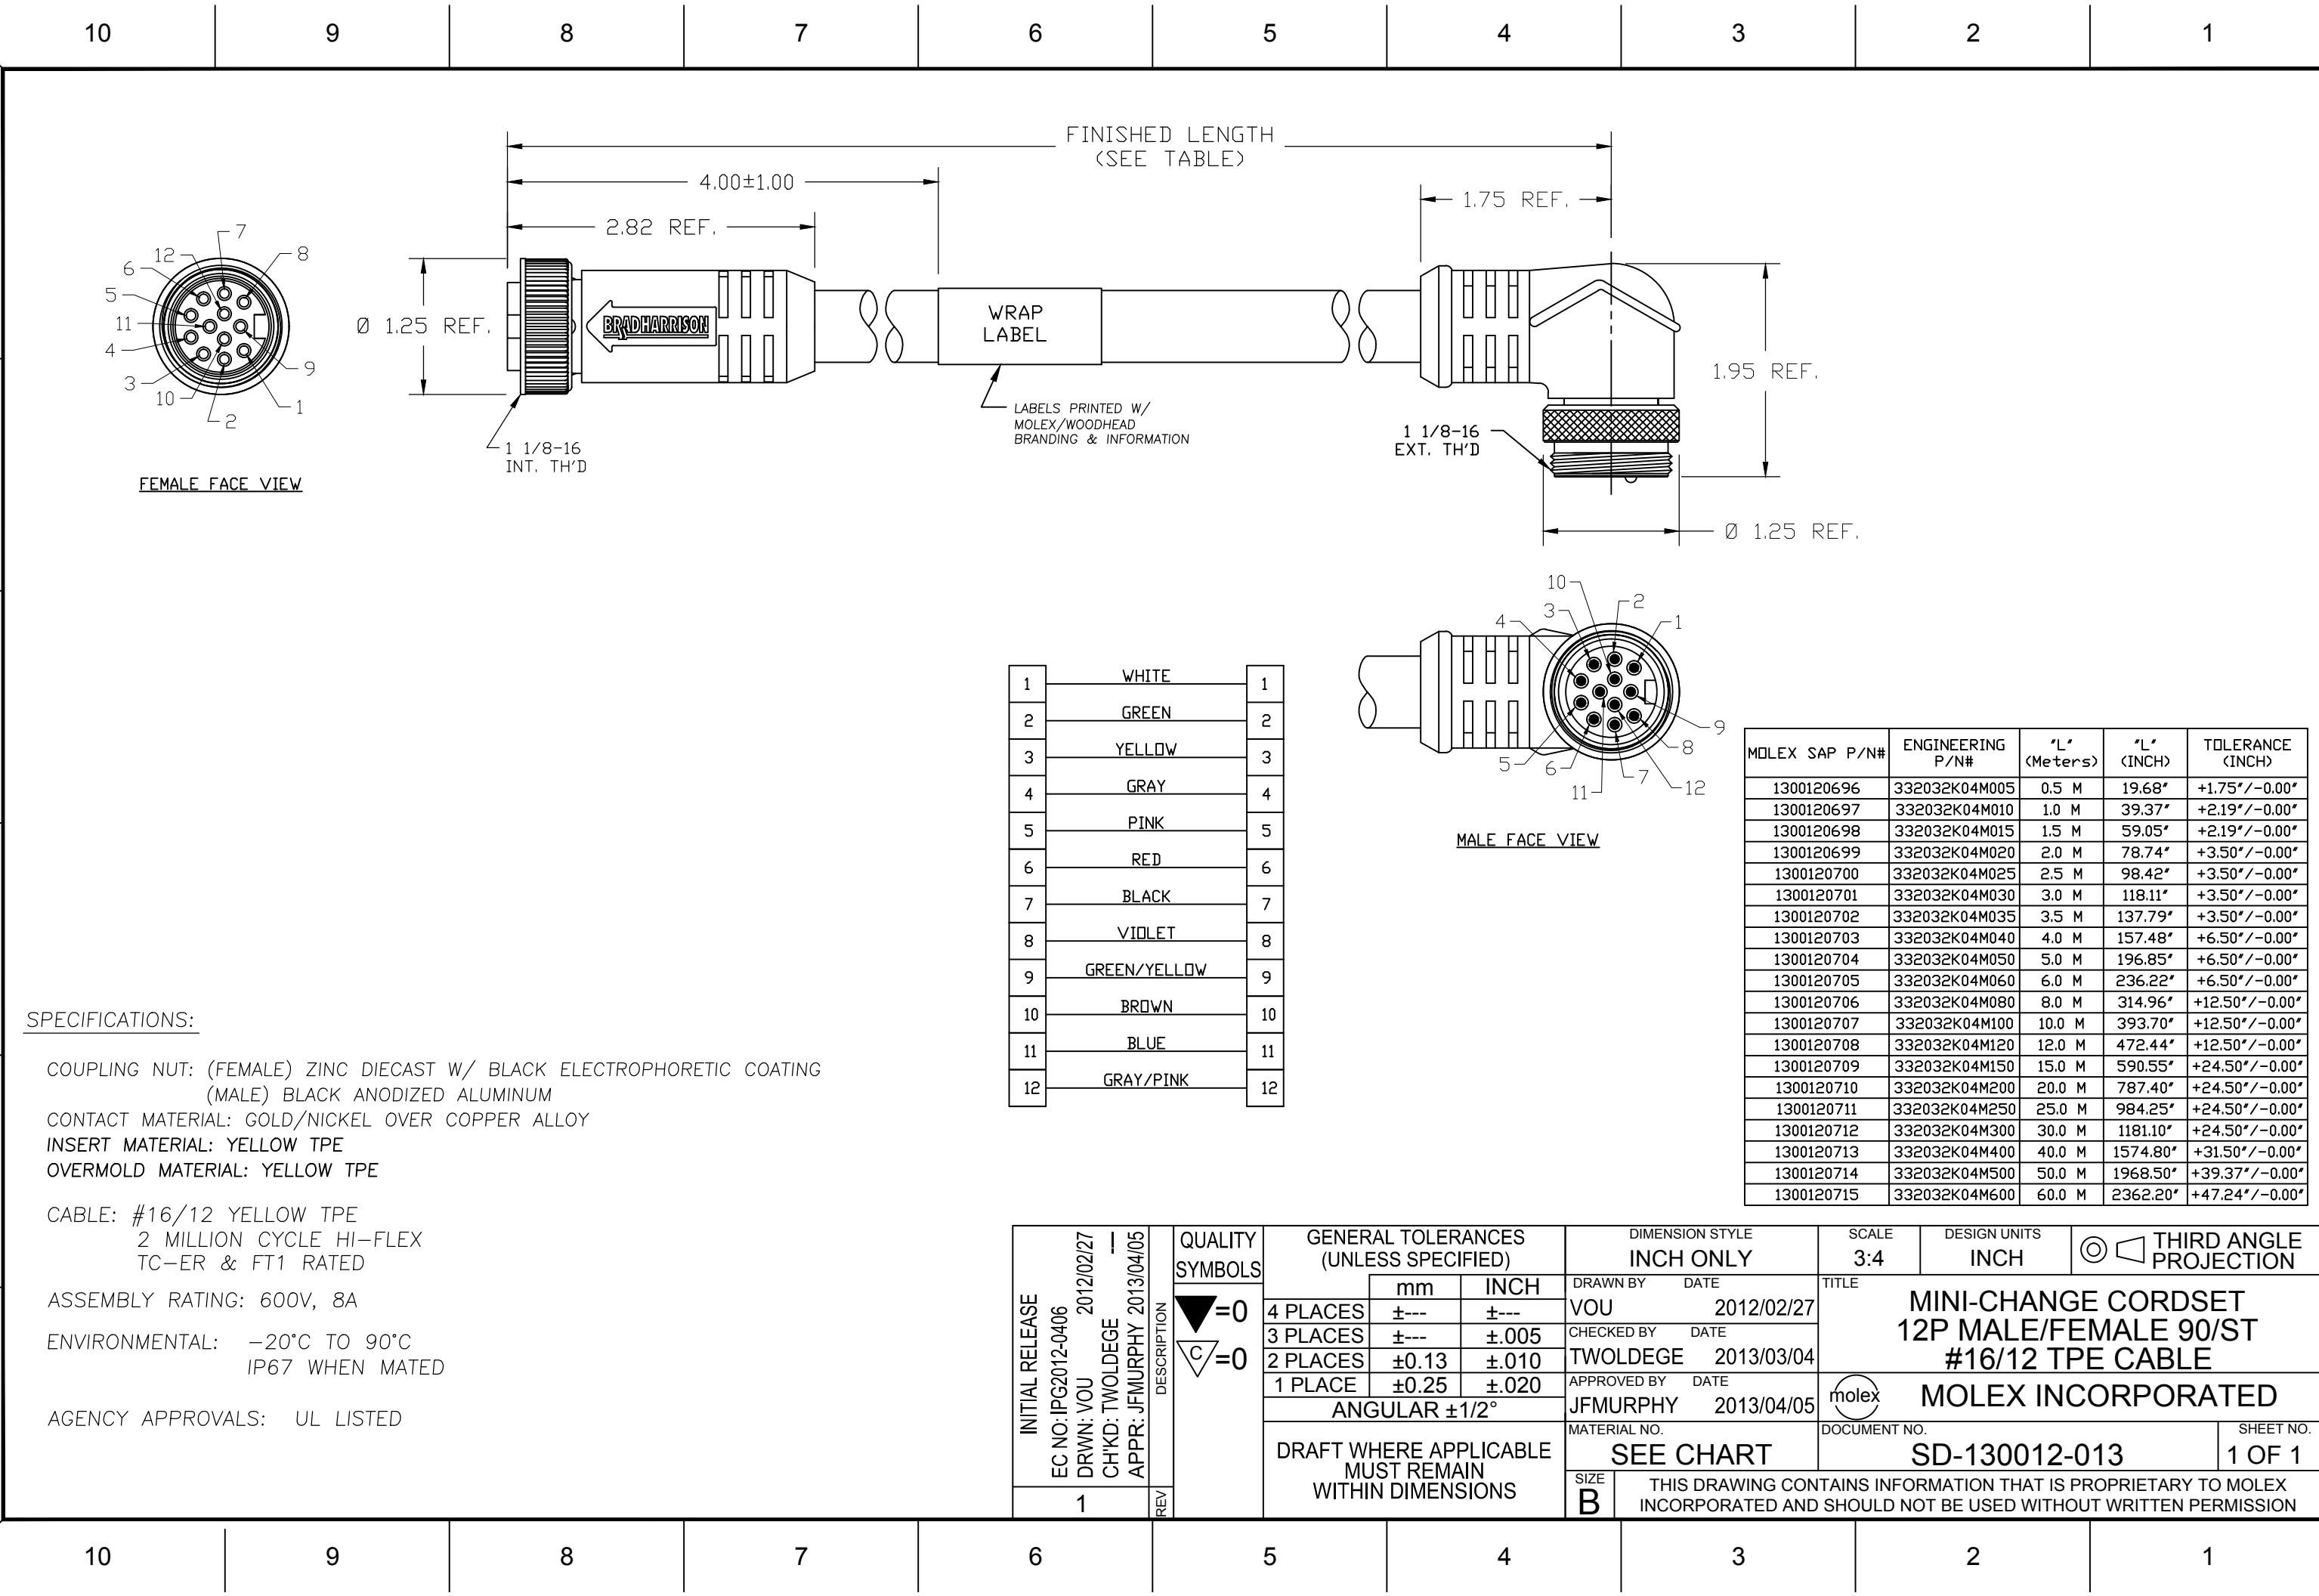

SPECIFICATIONS:

COUPLING NUT: (FEMALE) ZINC DIECAST W/ BLACK ELECTROPHORETIC COATING
(MALE) BLACK ANODIZED ALUMINUM
CONTACT MATERIAL: GOLD/NICKEL OVER COPPER ALLOY
INSERT MATERIAL: YELLOW TPE
OVERMOLD MATERIAL: YELLOW TPE

CABLE: #16/12 YELLOW TPE
2 MILLION CYCLE HI-FLEX
TC-ER & FT1 RATED

ASSEMBLY RATING: 600V, 8A

ENVIRONMENTAL: -20°C TO 90°C
IP67 WHEN MATED

AGENCY APPROVALS: UL LISTED

INITIAL RELEASE EC NO: IPG2012-0406 DRWN: VOU 2012/02/27 CHKD: TWOLDEGE APPR: JFMURPHY 2013/04/05	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH ONLY		SCALE 3:4	DESIGN UNITS INCH	THIRD ANGLE PROJECTION ⊙ □							
				mm	INCH	DRAWN BY VOU	DATE 2012/02/27	TITLE MINI-CHANGE CORDSET 12P MALE/FEMALE 90/ST #16/12 TPE CABLE									
			4 PLACES	±---	±---	CHECKED BY TWOLDEGE	DATE 2013/03/04										
			3 PLACES	±---	±.005	APPROVED BY JFMURPHY		DATE 2013/04/05	DOCUMENT NO. SD-130012-013								
			2 PLACES	±0.13	±.010												
			1 PLACE			±0.25	±.020	SHEET NO. 1 OF 1									
			ANGULAR ±1/2°														
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE CHART											
			SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												