


FEMALE FACE VIEW


MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1300280050	DND22A-M200	20M [65FT 7 IN]
1300280055	DND22A-M400	40M [131FT 3 IN]

MALE FACE VIEW



The diagram shows the male face view of a shaft with a keyway. The shaft is represented by a circle with concentric circles indicating the keyway. The keyway is located at the top of the shaft. The following features are labeled with numbers and leader lines:

- 1: Outer diameter of the shaft.
- 2: Keyway width.
- 3: Keyway depth.
- 4: Keyway height.
- 5: Keyway width.

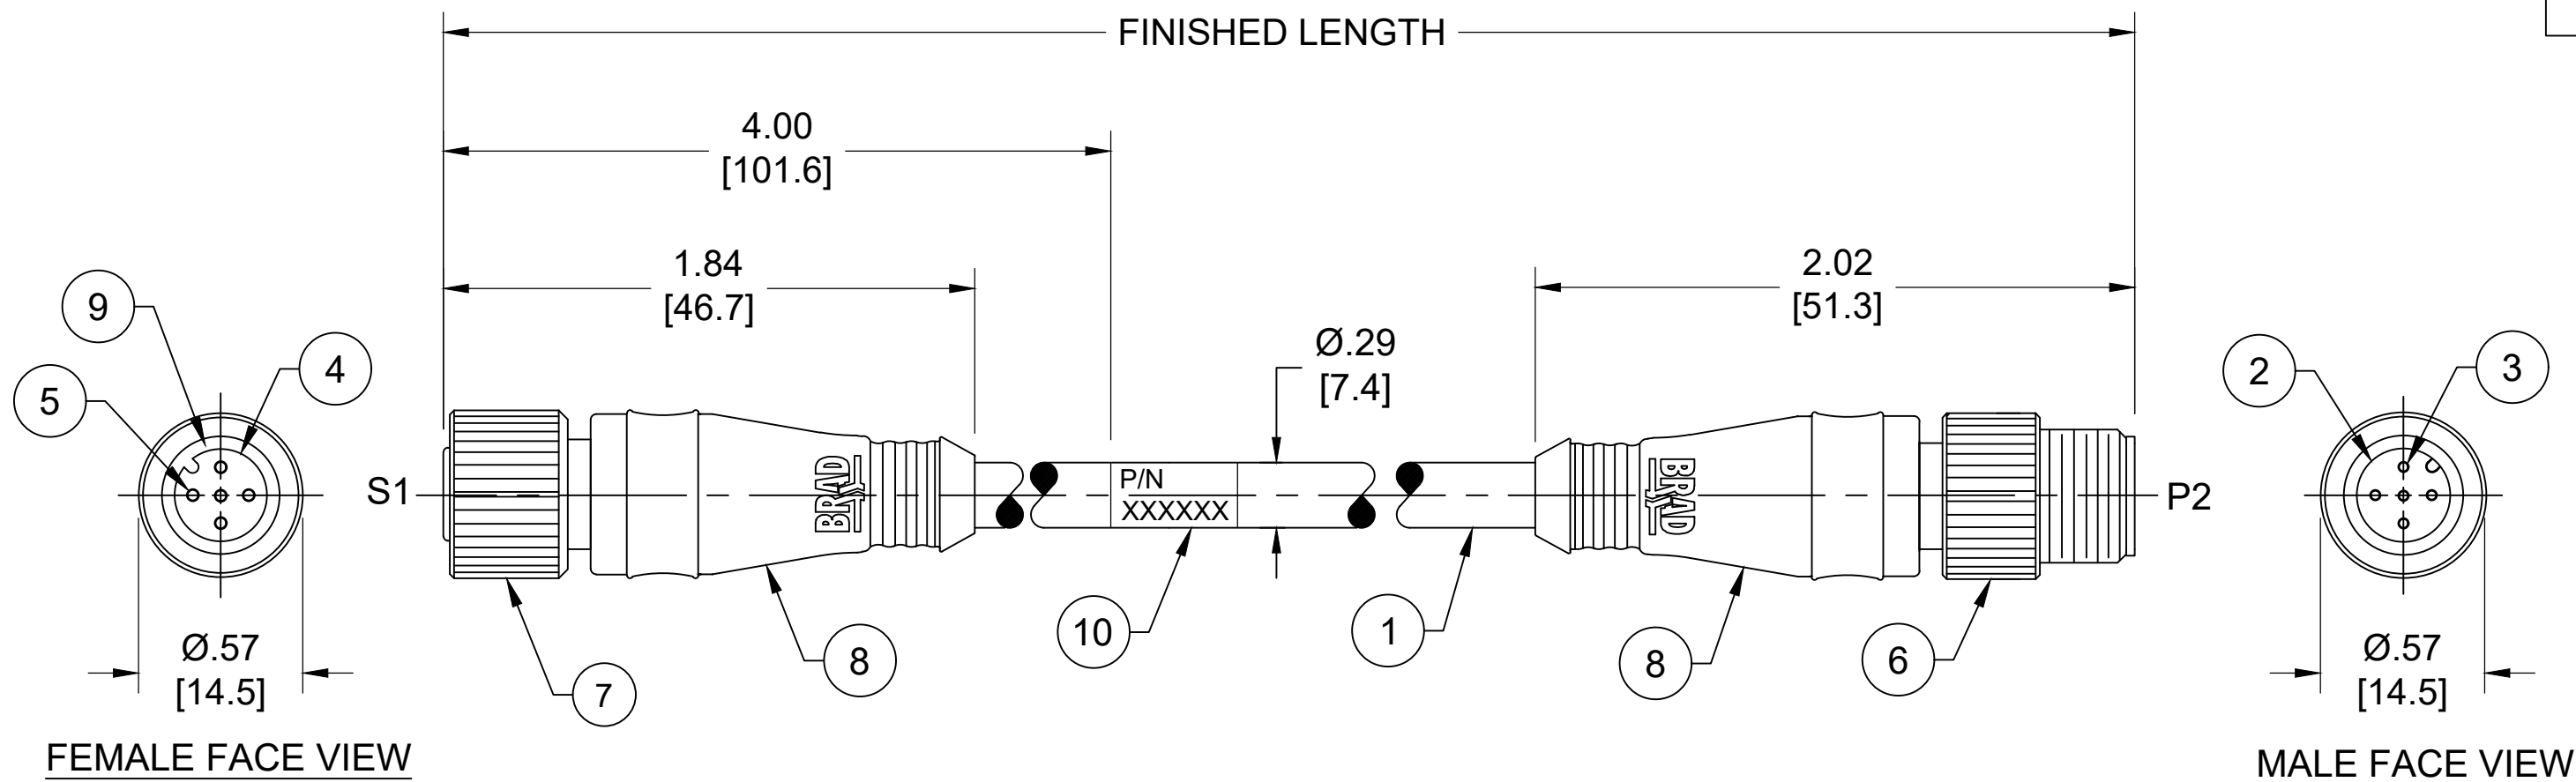

NOTES:

1. MATERIAL: AS NOTED
2. FINISH: AS NOTED
3. ELECTRICAL:
VOLTAGE : 60V AC/DC
CURRENT: 4A
4. TEMP RATING: -20° TO +80°C
5. PROTECTION: IP67 (WHEN MATED)
6. COUPLING THREAD: M12X1
7. UL LISTED FILE: E152210
CSA CERTIFIED FILE: LR6837
8. ALL DIMENSIONS ARE FOR REFERENCE
UNLESS TOLERACED OR NOTED OTHERWISE

Ø.57
[14.5]


FEMALE FACE

10	WRAP LABEL	VINYL	BLACK/YELLOW
9	O-RING	NITRILE	RED
8	OVERMOLD	TPC	GRAY
7	FEMALE COUPLING NUT	ZINC DIE CAST	BLACK E-COATED
6	MALE COUPLING NUT	ZINC DIE CAST	BLACK E-COATED
5	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
4	FEMALE INSERT	NYLON 6/6	BLACK
3	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL
2	MALE INSERT	NYLON 6/6	BLACK
1	CABLE #22 AWG	PVC	GRAY
ITEM	COMPONENT	MATERIAL	FINISH

PART NUMBER LEGEND

DND22A-M005

↑
FINISHED LENGTH:
M005= 0.5 METER
M010= 1 METER
M100= 10 METER

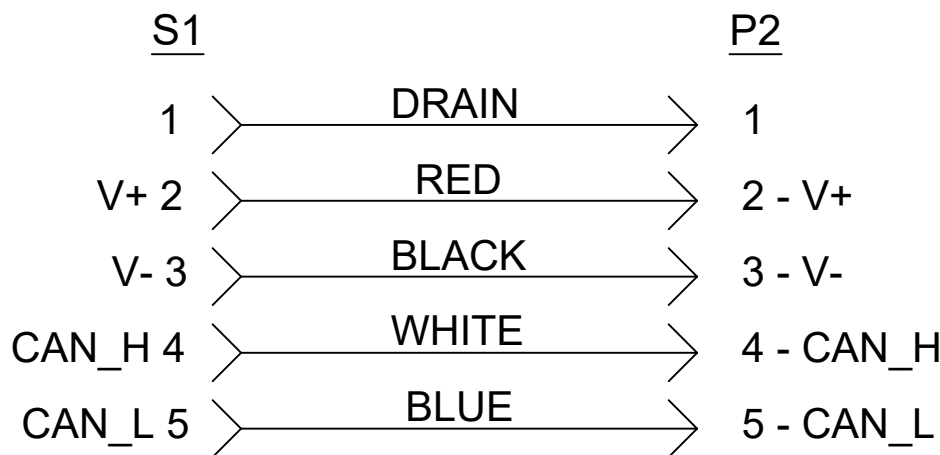

CABLE LENGTH TOLERANCES

<.3M [1FT]: +19mm-0 [+.75in-0]

.3 - .9M [1 - 3FT]: +44.5mm-0 [+1.75in-0]

.9 - 1.8M [3 - 6FT]: +55.6mm-0 [+2.19in-0]

1.8 - 3.7M [6 - 12FT]: +88.9mm-0 [+3.50in-0]

3.7 - 7.3M [12 - 24FT]: +165.1mm-0 [+6.50in-0]

7.3-14.6M [24 - 48FT]: +317.5mm-0 [+12.50in-0]

14.6 - 30.5M [48-100FT]: +622.3mm-0 [+24.50in-0]

OVER 30M [100FT] +2% OF FINISHED LENGTH

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
E =0 F =0 P =0 DIVISIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBER AS PER PCN#514336.			molex							
	INCH/MM		NTS												
	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 825582 DRWN: RAVINR12025/06/24 CHK'D: GGA2025/06/27 APPR: GGA2025/06/27 INITIAL REVISION: DRWN: BWOODMAN2009/03/13 APPR: JFMURPHY2009/03/31										
		mm	INCH												
	4 PLACES	±----	±----												
	3 PLACES	±----	±----												
	2 PLACES	±----	±----												
	1 PLACE	±----	±----		PRODUCT CUSTOMER DRAWING DOCUMENT NUMBERSD-130028-001 DOC TYPEPSD DOC PART001 REVISIONF2										
	0 PLACES	±----	±----												
	ANGULAR TOL ± ---- °														
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						C-SIZE		130028		SEE TABLE		GENERAL MARKET		1 OF 1	

FORMAT: IN-ACAD file prod C	12	11	10
-----------------------------	----	----	----