
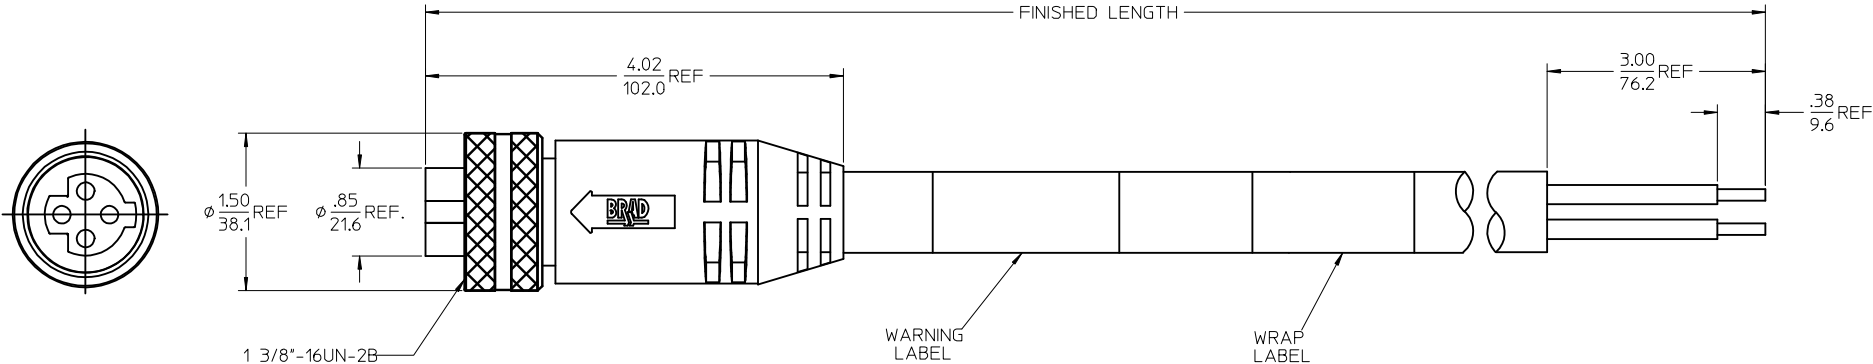


13	12	11	10	9	8	7	6	5	4	3	2	1
----	----	----	----	---	---	---	---	---	---	---	---	---

POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH
3	1300630056	C03100A48M020	32	2M +89-0MM (6'7"+3.50-0)
4	1300630181	C04100A48M020	32	2M +89-0MM (6'7"+3.50-0)

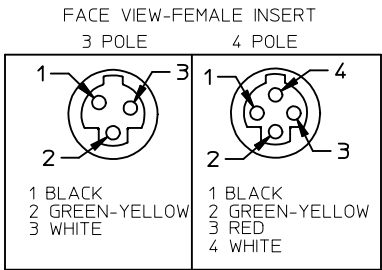

SPECS:

OVERMOLD: GRAY PVC

INSERT: BLACK PVC

COUPLING NUT: ANODIZED ALUMINUM

CABLE: #10AWG GRAY PVC

DUAL RATED UL TC/OPEN WIRING & STOOO

ELECTRICAL: 600V AC/DC

UPDATED PROFILE EC NO: IPG2014-1160 DRWNG:GUSTAFSON 2014/05/09 CHKD:VOU 2014/05/30 APPR:BWODMAN 2014/05/12 B	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY B.RUPERT	DATE 01/12/10	TITLE QUICK CHANGE FEMALE STRAIGHT ALT KEY 3 & 4 POLE AS PORTABLES MOLEX INCORPORATED					
			4 PLACES	± ---	± ---	CHECKED BY B.WOODMAN	DATE 01/12/10						
			3 PLACES	± ---	± ---	APPROVED BY JFMURPHY	DATE 2010/01/15						
			2 PLACES	± ---	± ---	MATERIAL NO.	DOCUMENT NO.					SHEET NO. 1 OF 1	
			1 PLACE	± ---	± ---	SEE CHART						SD-130063-056	
			ANGULAR ±1/2°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

12	11	10	9	8	7	6	5	4	3	2	1
----	----	----	---	---	---	---	---	---	---	---	---