


13	12	11	10	9	8	7	6	5	4	3	2	1
POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH								
3	1300640065	CC3030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640187	CC4030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640245	CC4030A48M100	32	10M +318-0MM (32'10" +12.5"-0")								

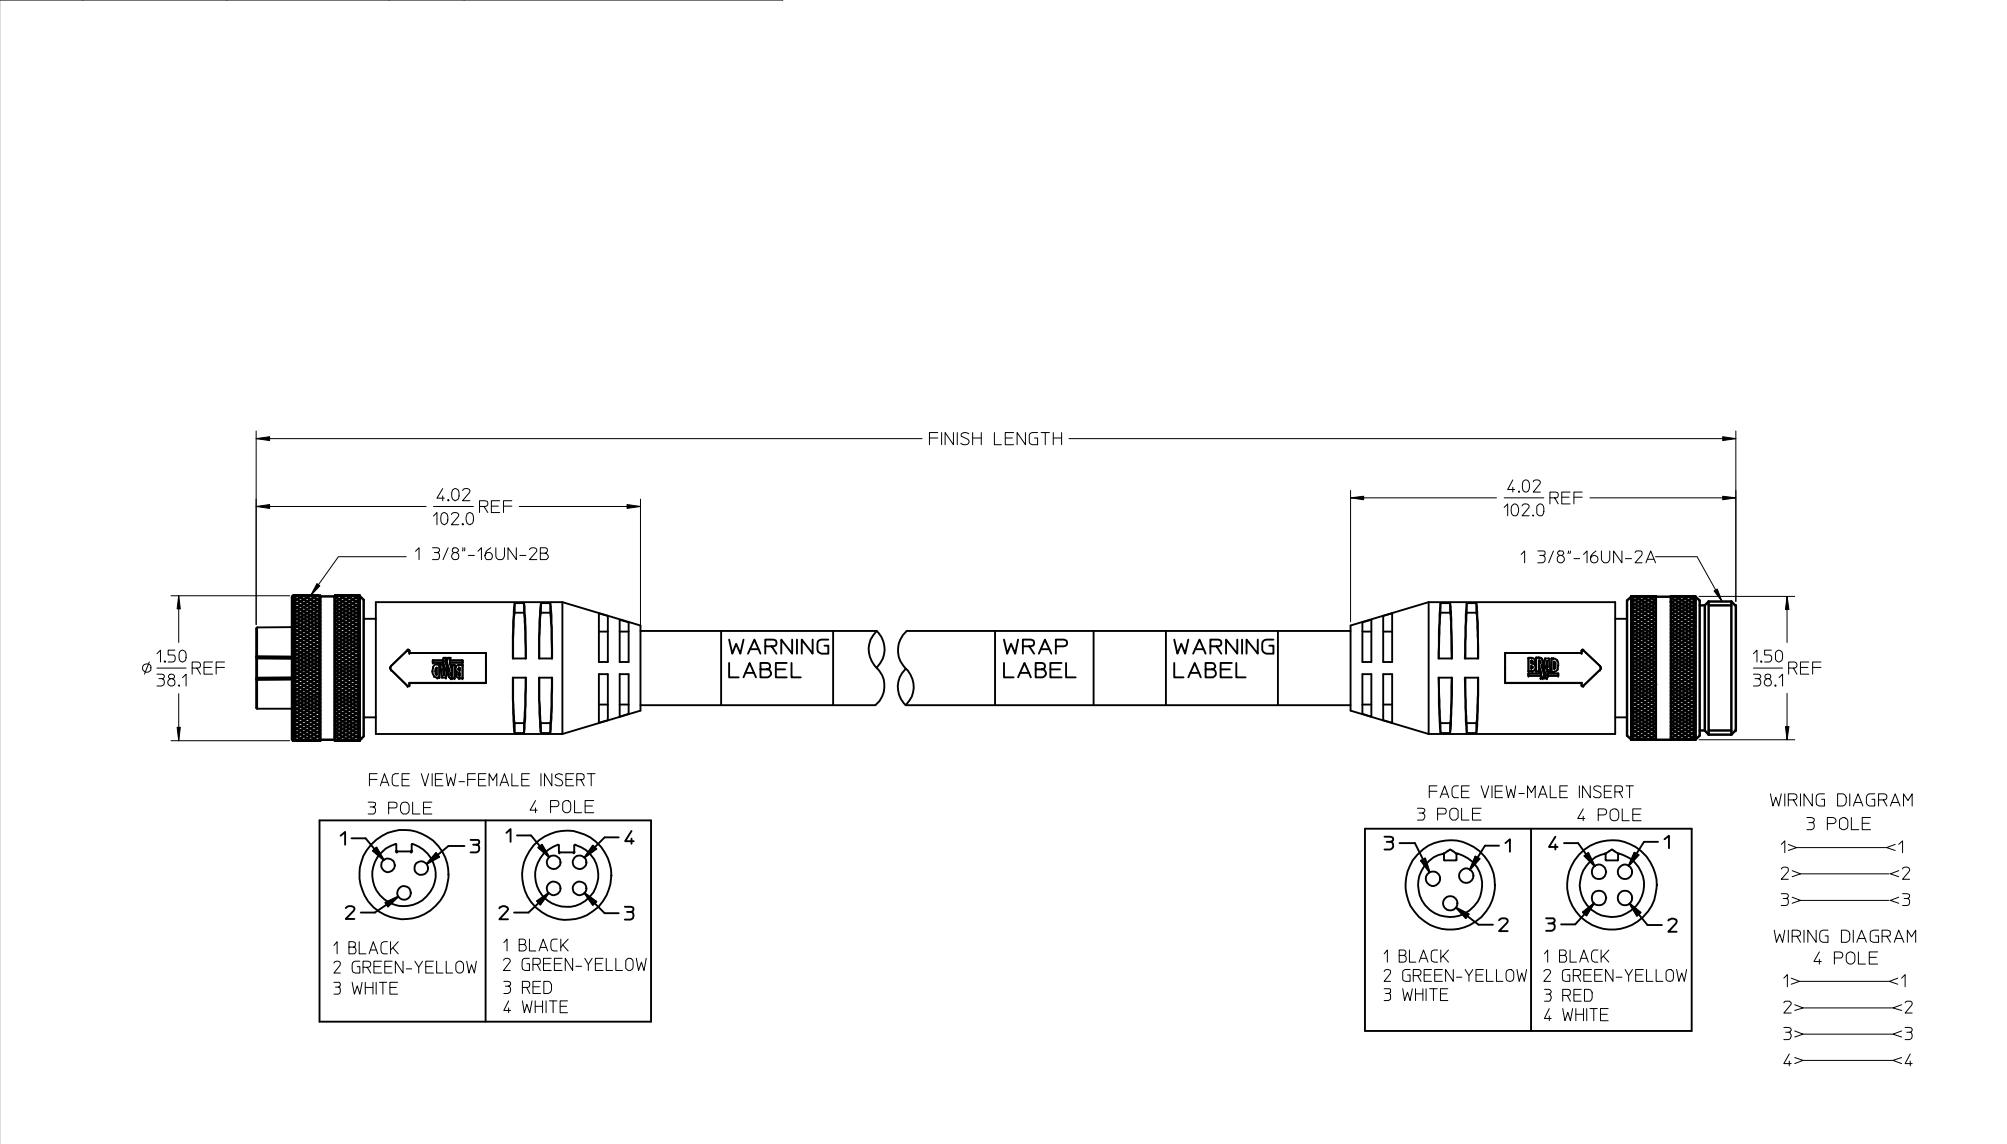

SPECS: OVERMOLD: GRAY PVC INSERT: BLACK PVC COUPLING NUT: ANODIZED ALUMINUM CABLE: #10AWG GRAY PVC DUAL RATED UL TC/OPEN WIRING & ST00W ELECTRICAL: 600V AC/DC	ADDED PART NUMBER EC NO: IPG2016-1155		QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:2		DESIGN UNITS INCH		THIRD ANGLE PROJECTION	
	DRWN:GGUSTAFSON 2016/02/23			mm		DATE		TITLE		QUICK CHANGE FEMALE/MALE STRAIGHT 3 & 4 POLE AS PORTABLES MOLEX INCORPORATED			
	CHKD:MZIELINSKI 2016/03/15			INCH		DRAWN BY		DATE					
	APPR:BMWOODMAN 2016/02/23			4 PLACES ± --- ± ---		CHECKED BY		DATE					
				3 PLACES ± --- ±.005		B.WOODMAN		01/12/10					
				2 PLACES ± --- ±.010		APPROVED BY		DATE					
				1 PLACE ± --- ±.020		JFMURPHY		2010/01/15		SD-130064-065		SHEET NO. 1 OF 1	
				ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART							
						SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					