





13	12	11	10	9	8	7	6	5	4	3	2	1
POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH								
3	1300640065	CC3030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640187	CC4030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640245	CC4030A48M100	32	10M +318-0MM (32'10" +12.5"-0")								

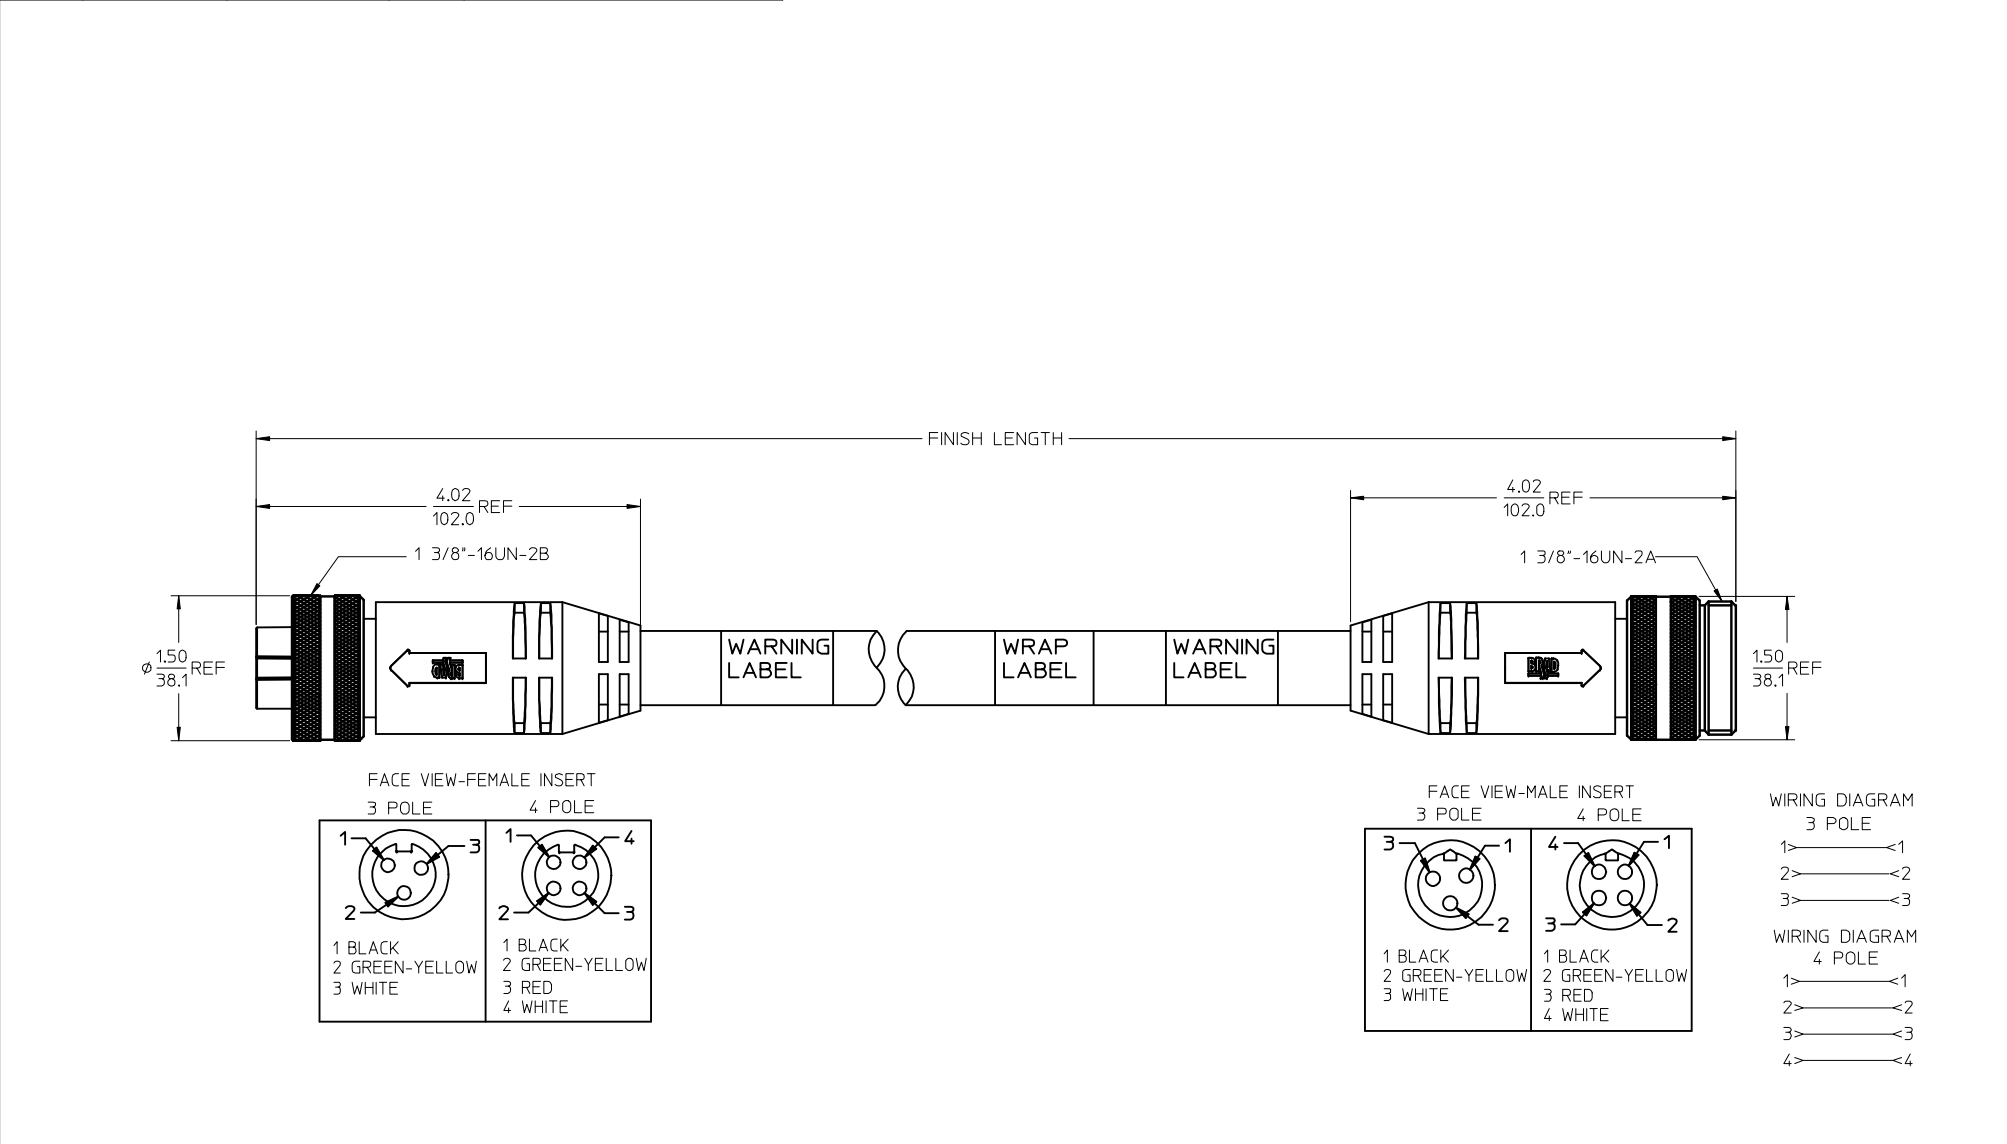

SPECS:
OVERMOLD: GRAY PVC
INSERT: BLACK PVC
COUPLING NUT: ANODIZED ALUMINUM
CABLE: #10AWG GRAY PVC
DUAL RATED UL TC/OPEN WIRING & STOOO
ELECTRICAL: 600V AC/DC

ADDED PART NUMBER EC NO: IPG2016-1155 DRWNGGUSTAFSON 2016/02/23 CHKD:MZIELINSKI 2016/03/15 APPR:BMWOODMAN 2016/02/23	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:2	DESIGN UNITS INCH	THIRD ANGLE PROJECTION																	
		<table><tr><th></th><th>mm</th><th>INCH</th></tr><tr><td>4 PLACES</td><td>± .---</td><td>± .---</td></tr><tr><td>3 PLACES</td><td>± .---</td><td>± .005</td></tr><tr><td>2 PLACES</td><td>± .---</td><td>± .010</td></tr><tr><td>1 PLACE</td><td>± .---</td><td>± .020</td></tr></table>			mm	INCH	4 PLACES	± .---	± .---	3 PLACES	± .---	± .005	2 PLACES	± .---	± .010	1 PLACE	± .---	± .020	DRAWN BY B.RUPERT		DATE 01/12/10	TITLE QUICK CHANGE FEMALE/MALE STRAIGHT 3 & 4 POLE AS PORTABLES MOLEX INCORPORATED			
			mm	INCH																					
		4 PLACES	± .---	± .---																					
3 PLACES	± .---	± .005																							
2 PLACES	± .---	± .010																							
1 PLACE	± .---	± .020																							
CHECKED BY B.WOODMAN		DATE 01/12/10																							
APPROVED BY JFMURPHY		DATE 2010/01/15	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-130064-065		SHEET NO. 1 OF 1																		
REV		DESCRIPTION		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																			