





13	12	11	10	9	8	7	6	5	4	3	2	1
POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH								
3	1300640065	CC3030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640187	CC4030A48M020	32	2M +89-0MM (6'7"+3.50-0)								
4	1300640245	CC4030A48M100	32	10M +318-0MM (32'10" +12.5"-0")								

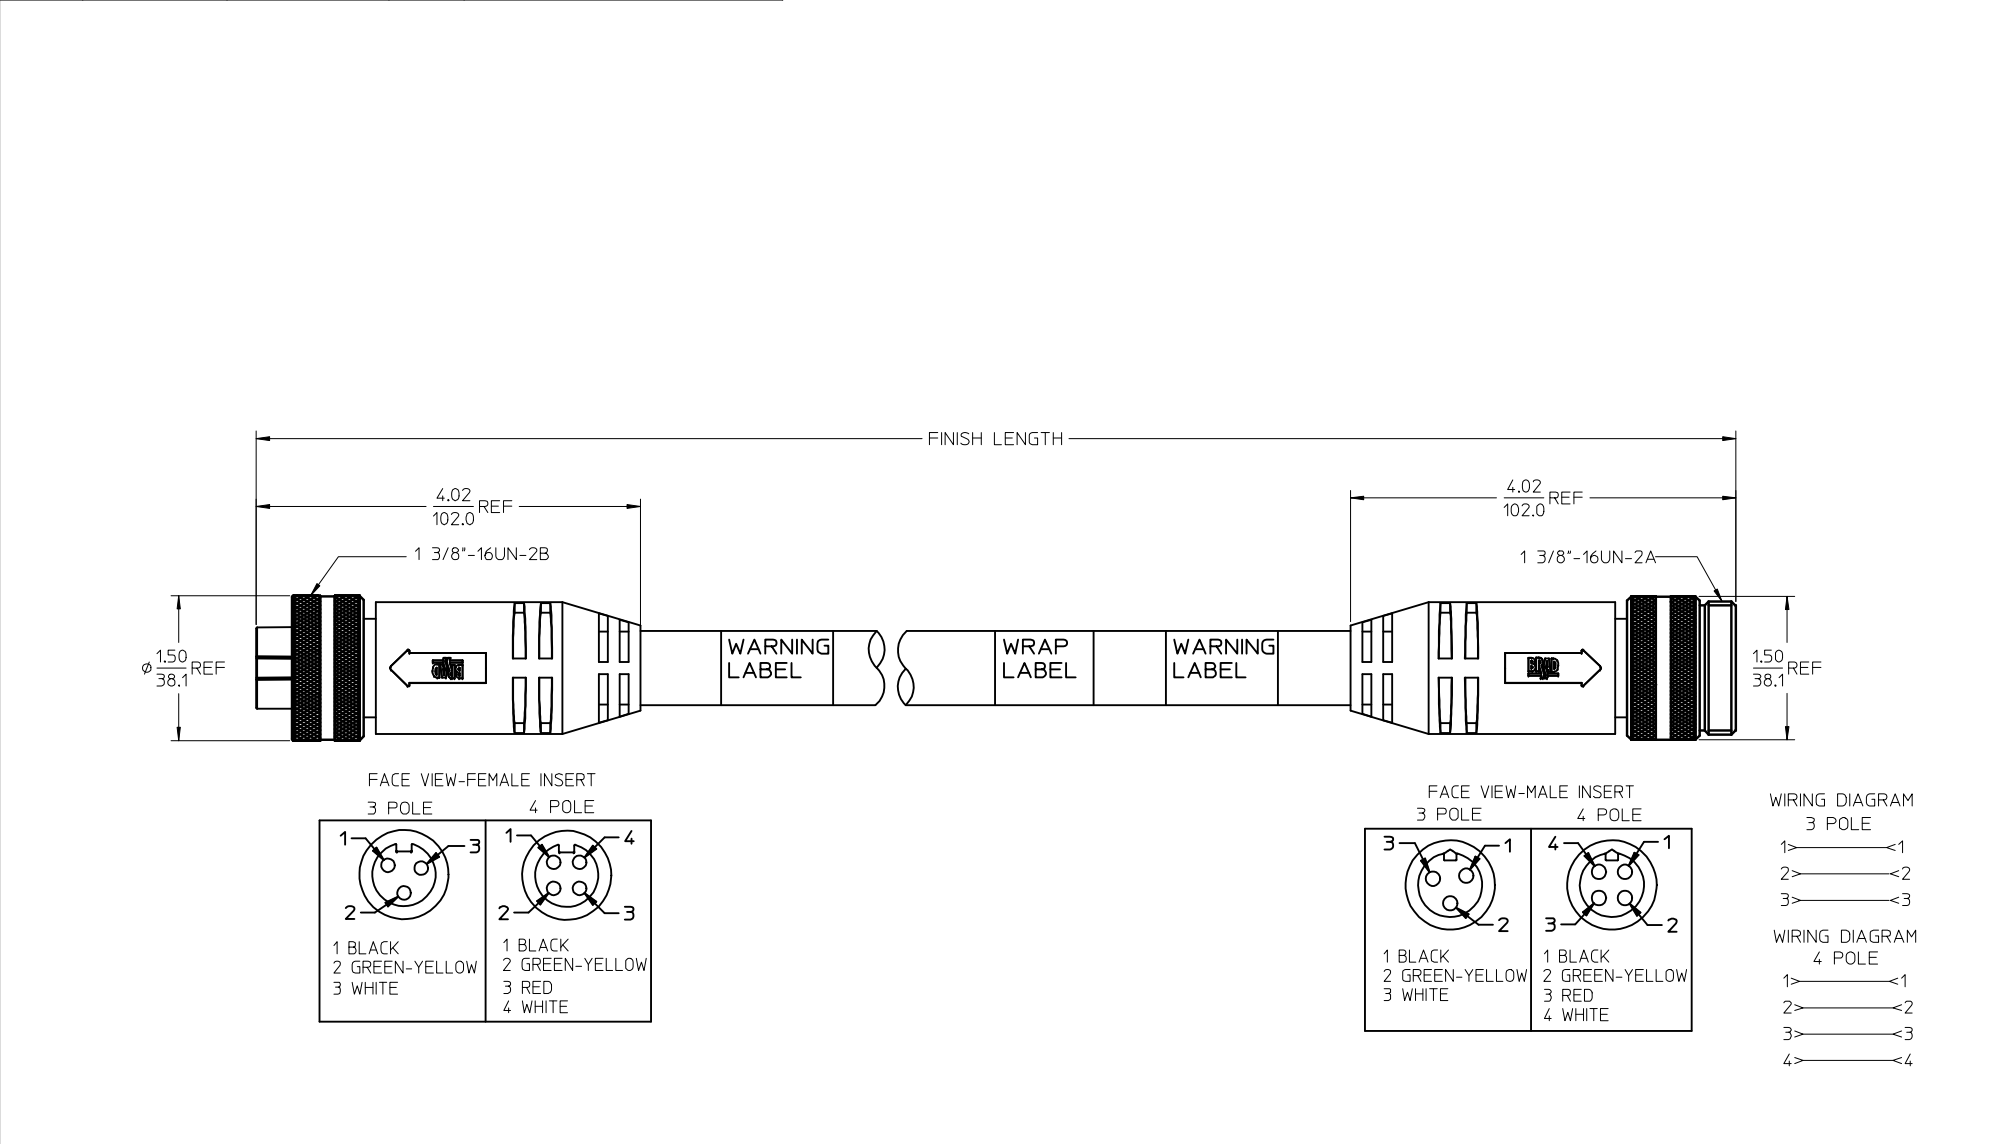

SPECS:
OVERMOLD: GRAY PVC
INSERT: BLACK PVC
COUPLING NUT: ANODIZED ALUMINUM
CABLE: #10AWG GRAY PVC
DUAL RATED UL TC/OPEN WIRING & STOOO
ELECTRICAL: 600V AC/DC

ADDED PART NUMBER EC NO: IPG2016-1155 DRWNGGUSTAFSON 2016/02/23 CHKD:MZIELINSKI 2016/03/15 APPR:BMWOODMAN 2016/02/23	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:2	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
				DRAWN BY DATE B.RUPERT 01/12/10		TITLE QUICK CHANGE FEMALE/MALE STRAIGHT 3 & 4 POLE AS PORTABLES MOLEX INCORPORATED			
				CHECKED BY DATE B.WOODMAN 01/12/10					
				APPROVED BY DATE JFMURPHY 2010/01/15		DOCUMENT NO. SD-130064-065 SHEET NO. 1 OF 1			
				MATERIAL NO.					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					