
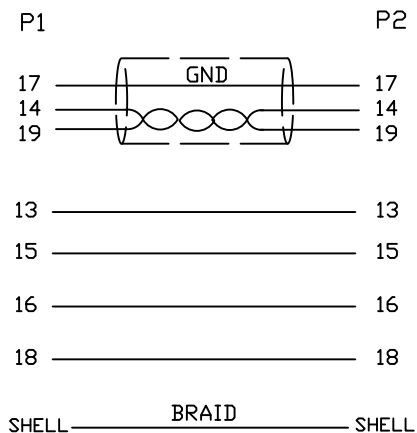


1.Wiring Diagram.

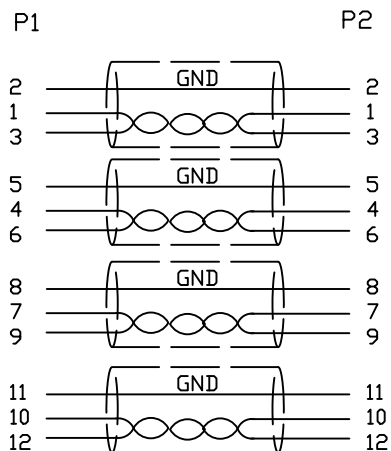

2.Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3.Each pcs with PE polybag.

4.For HDMI 2.0Ver.and Support Resolution ratio 3840x2160(4k)

And 60fps frame rate

5	COPER	W20MM*L35MM	2	
4	PVC	45P PVC BLACK OVERMOLD	25g	
3	PE	LLDPE 500026 6201 INSIDE MOLDING	16g	
2	CONN	HDMI A TYPE MALE PIN G/F ,SHELL PLATED G/F, INSULATION BLACK	2	P1.P2
1	CABLE	UL20276 (28AWG (7/0.127TC) *IP+D+EA+AL/MY) *5P+28AWG (7/0.127TC) *4C +AEM(16/8/0.12AM) OD7.3 BLACK HDMI2.0V.	1	3000mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF
BILL OF MATERIAL				

B		ADD COPPER	2021/2/28	
A		INITIAL RELEASE	2014/11/12	
REV	ECN	DESCRIPTION		DATE
		CnC Tech,LLC	TITLE	HDMI A/M TO HDMI A/M CABLE
		DWN NO.	740-10012-00300	REV B
DRAWN	EDWIN LAI	DATE	2/28/21	CUSTOMER P/N:
CHECKED	Win.C	DATE	2/28/21	CUSTOMER:
APPROVAL			SHEET 1 OF 1	