
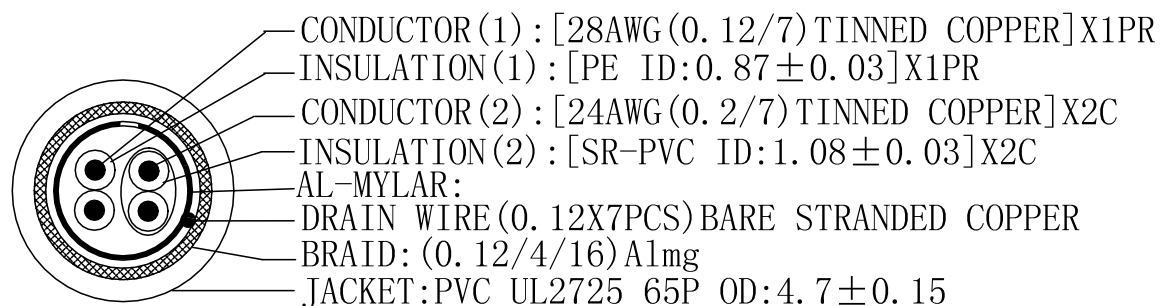



NOTE: ALL MATERIAL COMPLIANT REACH STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/1	19-05-14	B0514B	Remakes Color
A/2	19-07-27	B0722A	Add twist per
A/3	20-04-27	B0427C01	Correcting Cable OD

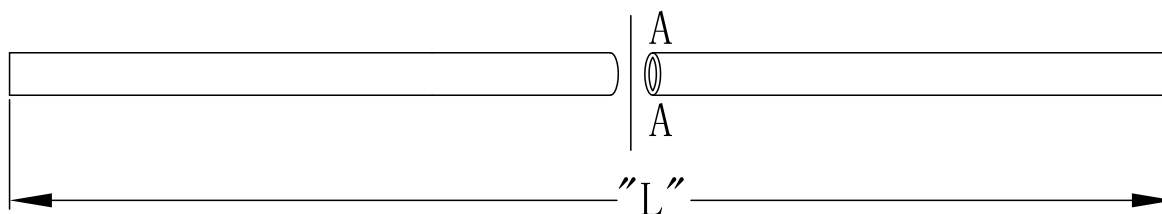

1. COLOR: (WHITE, GREEN) X1PR (1PR 15~18mm per twist)
 (RED, BLACK) X2C (1PR+2C 70~80mm per twist)



CABLE BLACK PRINT
 E166160 AWM 2725 80°C 30V
 28AWGX1P+24AWGX2C USB2.0\




P/N label

Parts number label:50X25mm stick on the reel

PART NO	WIRE LENGTH "L"	CABLE COLOR	INTERNAL COLOR CODE
2725-2824-BE-01000-A	305M/R		IV-29#

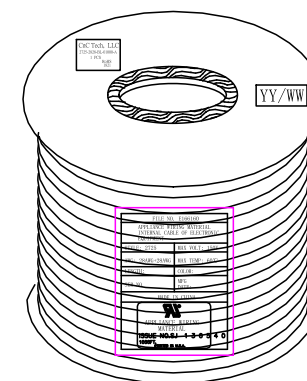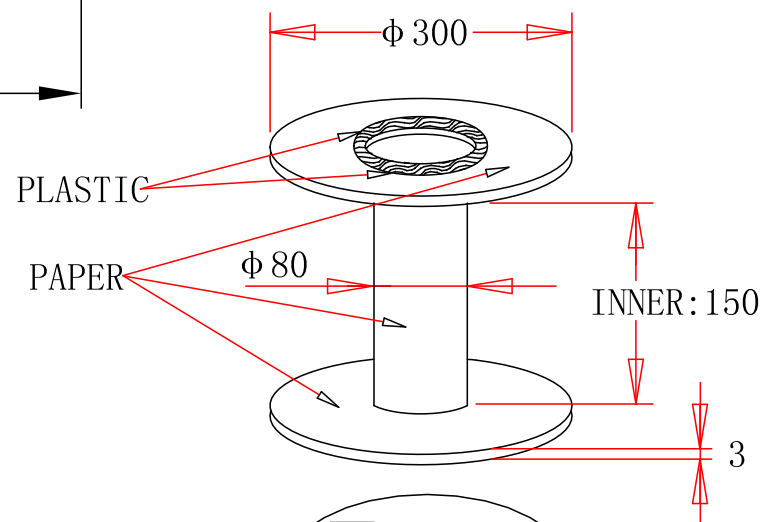

305M/R. "PE"FOAM WRAPPED



CnC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY:	DATE: 2020/04/27	DESCRIPTION: 305M/R UL2725 4C CABLE	
CHECKED BY:	SHEET 1 of 2	ITEM NO. 2725-2824-BE-01000-A	
APPROVED BY:	SCALE 1:1	REV. A/3	UNIT: mm

NOTE: ALL MATERIAL COMPLIANT REACH STANDARD

90	
100	
FILE NO. E166160	
APPLIANCE WIRING MATERIAL INTERNAL CABLE OF ELECTRONIC EQUIPMENT	
STYLE: 2725	MAX VOLT: 30V
AWG: 28AWG+24AWG	MAX TEMP: 80°C
LENGTH:	COLOR:
SER NO.	MFG DATE:
MADE IN CHINA	

UL identification code

28	
44	

UL

UL LABEL

CnC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY:		DATE: 2020/04/27	DESCRIPTION: 305M/R UL2725 4C CABLE
CHECKED BY:		SHEET 2 of 2	ITEM NO. 2725-2824-BE-01000-A
APPROVED BY:		SCALE 1:1	REV. A/3
		UNIT: mm	