
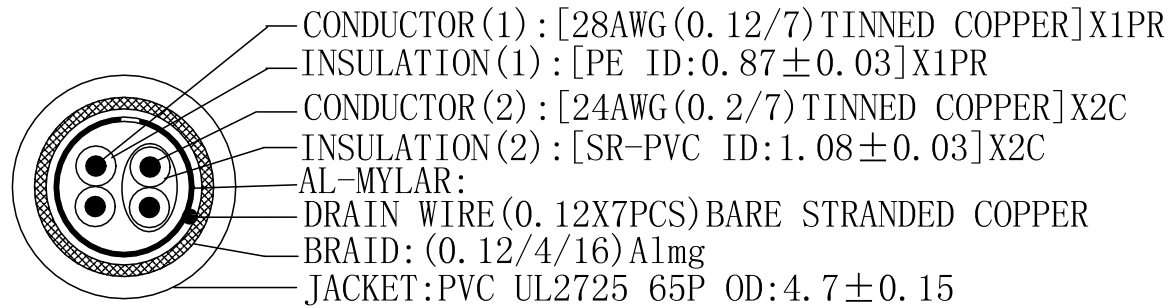



NOTE: ALL MATERIAL COMPLIANT REACH STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/1	19-05-14	B0514B	Remakes Color
A/2	19-07-27	B0722A	Add twist per
A/3	20-04-27	B0427C01	Correcting Cable OD

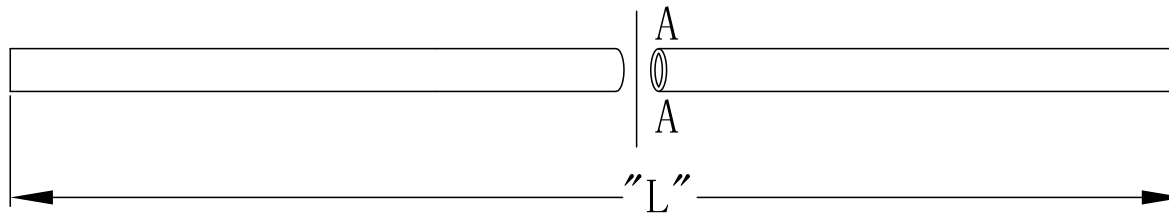


PLASTIC

PAPER

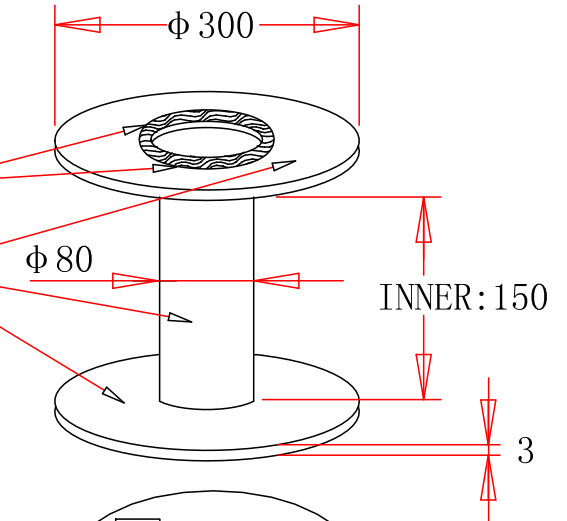



1. COLOR: (WHITE, GREEN) X1PR (1PR 15~18mm per twist)
 (RED, BLACK) X2C (1PR+2C 70~80mm per twist)

CABLE WHITE PRINT
 E166160 AWM 2725 80°C 30V
 28AWGX1P+24AWGX2C USB2.0\



P/N label

Parts number label:50X25mm stick on the reel

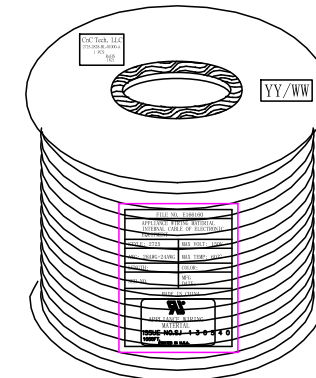

305M/R. "PE"FOAM WRAPPED

PART NO	WIRE LENGTH "L"	CABLE COLOR	INTERNAL COLOR CODE
2725-2824-BL-01000-A	305M/R		BK半雾

CnC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY:	DATE: 2020/04/27	DESCRIPTION: 305M/R UL2725 4C CABLE	
CHECKED BY:	SHEET 1 of 2	ITEM NO. 2725-2824-BL-01000-A	
APPROVED BY:	SCALE 1:1	REV. A/3	UNIT: mm

NOTE: ALL MATERIAL COMPLIANT REACH STANDARD

90	
100	
FILE NO. E166160	
APPLIANCE WIRING MATERIAL INTERNAL CABLE OF ELECTRONIC EQUIPMENT	
STYLE: 2725	MAX VOLT: 30V
AWG: 28AWG+24AWG	MAX TEMP: 80°C
LENGTH:	COLOR:
SER NO.	MFG DATE:
MADE IN CHINA	

UL identification code

28	
44	
UL	
APPLIANCE WIRING MATERIAL	
ISSUE NO.SJ 130540	
1000FT. PRINTED IN U.S.A.	

UL LABLE

CnC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY:	DATE: 2020/04/27	DESCRIPTION: 305M/R UL2725 4C CABLE	
CHECKED BY:	SHEET 2 of 2	ITEM NO. 2725-2824-BL-01000-A	
APPROVED BY:	SCALE 1:1	REV. A/3	UNIT: mm