

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Power Cord, , Efficiency Level: , Case Color/Style: , , Input Rating: , , Output Rating: W, 0.0V@0.0A, Output Configuration: mm, / Cond, , , Ferrite: , , GT Cord #, Pin Out: , Blades/Input Cord: , Approvals: CCC; to , GT Cable #: / Conductors, m Model No. Power Cord Part No./Ordering No. H-115-BK Rev B
---	--

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <http://www.globtek.com/iso-certificates/>

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<http://www.globtek.com/terms-and-conditions/>).

Prop 65 Statement:<https://www.globtek.com/prop-65-statement.pdf>

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:

Customer P/N:

Quote Number:

Date:

Authorized Representative Name:

Authorized Representative Signature:

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Power Cord, , Efficiency Level: , Case Color/Style: , , Input Rating: , , Output Rating: W, 0.0V@0.0A, Output Configuration: mm, / Cond, , Ferrite: , , GT Cord #, Pin Out: , Blades/Input Cord: , Approvals: CCC; to , GT Cable #: / Conductors, m Model No. Power Cord Part No./Ordering No. H-115-BK Rev B
---	--

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
B	UPDATED UNIT OF MEASURE AND ADDED PACKAGING DETAILS	DR	06/02/2023	QA
A	Initial release	QA	12/02/2022	QA

AGENCY ONLINE DOCUMENTS <http://en.globtek.com/cordsets/>

RoHS/RoHS3 Declaration <https://www.globtek.com/dcs/SPJ8VNR/hFMCV5KLBCBtlgixC9b9Dg>

REACH Declaration <https://www.globtek.com/r2/eM2co8>


Conflict Minerals Declaration <https://www.globtek.com/r2/SNw6P3>

Prop 65 Statement <https://www.globtek.com/r2/VMPRnr>

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

Conductor:

Bare Copper; Cover: PVC SJT 16AWG*3C 105°C, core color: black, green, white, jacket: black color, environmentally friendly material

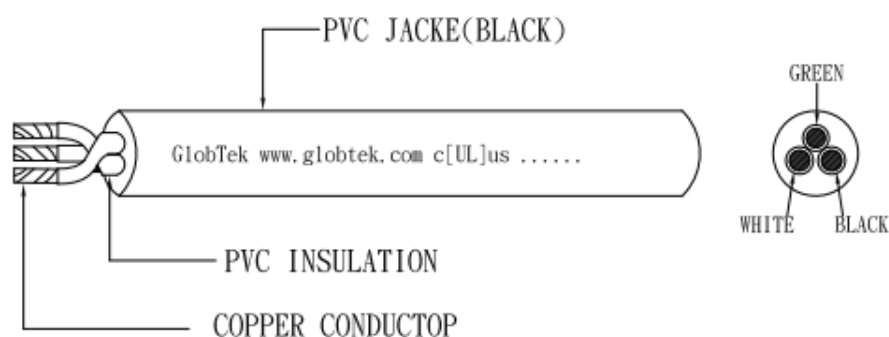

Note:

Conductor construction: 26/0.254±0.005
Insulation outer diameter: Ø3.0±0.05
Insulation Thickness: Minimum 0.69mm:
Coating outer diameter: Ø8.3±0.15
Coating Thickness: Minimum 0.61mm
unit of measure is feet for ordering is in FEET


Printed on the wire is:

(UL) Exxxxxx SJT 105°C 3X16AWG (1.31mm²) 300V VW-1 (MFG Name, GlobTek, Inc. or equal)

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Power Cord, , Efficiency Level: , Case Color/Style: , , Input Rating: , , Output Rating: W, 0.0V@0.0A, Output Configuration: mm, / Cond, , Ferrite: , , GT Cord #, Pin Out: , Blades/Input Cord: , Approvals: CCC; to , GT Cable #: / Conductors, m	
	Model No. Power Cord	
	Part No./Ordering No. H-115-BK	Rev B

CSA LLxxxxxx (or cUL) TYPE SJT 105°C 3X1.31mm²(16AWG) 300V VW-1

Packing:
Approximate 4000 meter per spool

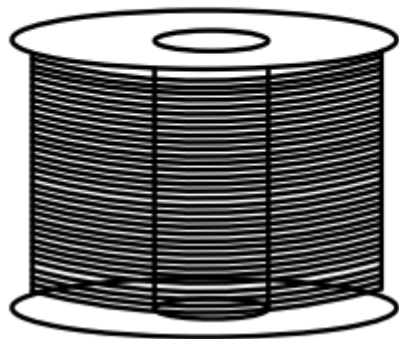

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Power Cord, , Efficiency Level: , Case Color/Style: , , Input Rating: , , Output Rating: W, 0.0V@0.0A, Output Configuration: mm, / Cond, , Ferrite: , , GT Cord #, Pin Out: , Blades/Input Cord: , Approvals: CCC; to , GT Cable #: / Conductors, m	
	Model No. Power Cord	
	Part No./Ordering No. H-115-BK	Rev B

PACKAGING

Packing Spec P/N:	
Box Qty:	1
Gift Box Size (mm):	
Gift Box Color:	White
Master Carton Size (mm):	TBD
Master Carton Cubic Volume (m³): 0.00	
Master GW (Kg):	kg
wt Ea. (Kg):	kg
wt Ea. (Kg):	kg
LABEL SPECS: ,	
PACK SPEC:	