

Product data sheet

Specifications

SQUARE D



Meter mains, QO, CSED, ringed socket, 400A, surface mount, class 320, no bypass

CU12L400CN

 To be discontinued on: Dec 25, 2025

 To be discontinued

Product availability: Stock - Normally stocked in distribution facility

Main

Product or Component Type	Meter Mains
Range of Product	QO

Complementary

Line Rated Current	400 A
Short-circuit current	25 kA
Network number of phases	1
Meter socket type	Ringed
Mounting	Surface Semi flush with field installed flange kit
Number of spaces	0
Number of circuits	0
Number of Tandem Breakers	0
Hub type	A-L
Electrical connection	Lugs, service ground Studs, line side
Wire Size	AWG 4...250 kcmil aluminium)service ground AWG 4...250 kcmil copper)service ground
Disconnect	Service disconnect (ordered separately)
Main Breaker Rating	200 A
Service feed location	UG
Bypass type	Class 320 No bypass
Height	43.00 in (1092.20 mm)
Width	28.25 in (717.55 mm)
Depth	7.87 in (199.90 mm)
Bus Rating	200.0 A

Environment

Product certifications	UL E-6294
------------------------	-----------

Ordering and shipping details

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Category	US1DE3A00022
Discount Schedule	DE3A
GTIN	785901928195
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	9.69 in (24.6 cm)
Package 1 Width	29.41 in (74.7 cm)
Package 1 Length	42.01 in (106.7 cm)
Package weight(Lbs)	111.999 lb(US) (50.802 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration


Dimensions

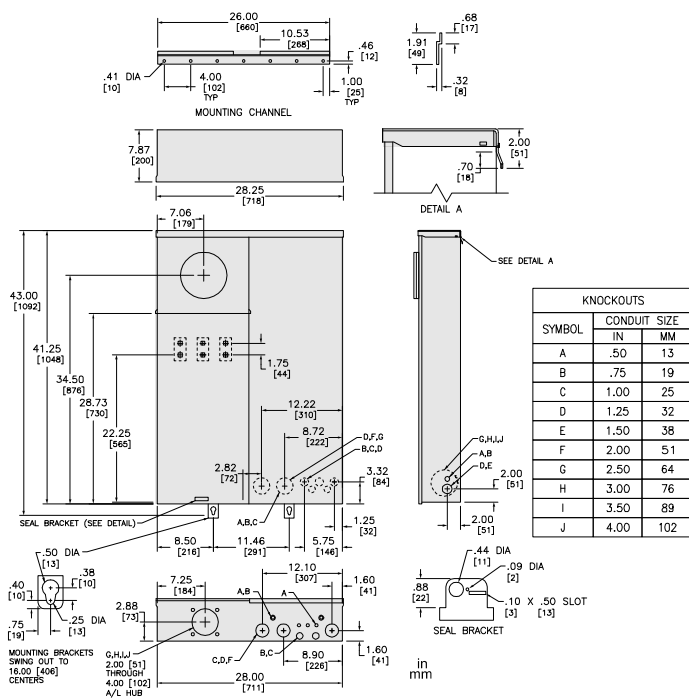

All dimensions are approximate. Also refer to technical documentation.

Technical Illustration

Wiring diagram

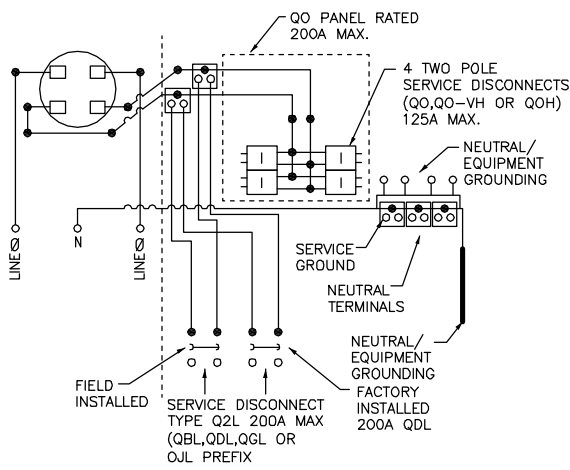

 TWO POLE TYPES QO, QOA OR QOC ONLY.
INSTALL NO MORE THAN FOUR CIRCUIT BREAKERS.
CIRCUIT BREAKER IS LIMITED TO 125 AMP MAX.

USE ONLY SQUARE D SERVICE DISCONNECTS WITH
PREFIXES QO, QB, QD, QG OR QJ AND REPLACEMENT PARTS,
WITH THIS PRODUCT. USE OF OTHER COMPONENTS
VOIDS THE WARRANTY, MAY VOID THE UL LISTING
AND MAY RESULT IN PROPERTY LOSS OR PERSONAL
INJURY.

A SQUARE D UL LISTED SECONDARY SURGE
ARRESTER MAY PLUG ON TWO ADJACENT
SPACES. ORDER CATALOG NO Q02175SB.