


© — TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	Y2		21AUG2025		

A	[.46]	[.028]	--	12	9.5[.375]	6	38	0.18[.007]	04121	5-192043-0		
A	[.46]	[.028]	--	12	9.5[.375]	1-2	38	0.18[.007]	04128	4-192043-9	OBSELETE	
A	[.46]	[.028]	--	12	9.5[.375]	UNPL	38	0.18[.007]	04120	4-192043-8	OBSELETE	
A	[.55]	[.024]	--	12	9.5[.375]	6	38	0.15[.006]	04108	4-192043-7	△ 19	
A	[.60]	[.028]	--	12	9.5[.375]	3-2	39	0.15{.006]	--	4-192043-6		
A	[.55]	[.024]	--	12	9.5[.375]	3-2	38	0.15[.006]	04053	4-192043-5		
A	[.53]	[.024]	--	12	9.5[.375]	1-2	38	0.15[.006]	04067	4-192043-4	OBSELETE	
A	--	--	--	12	9.5[.375]	1-2	38	0.15[.006]	04092	4-192043-3	OBSELETE	
SUPERSEDED BY 4-192043-1									04107	4-192043-2		
A	[.55]	[.024]	--	12	9.5[.375]	UNPL	38	0.15[.006]	04071	4-192043-1		
A	[.55]	[.026]	--	12	9.5[.375]	5-2	38	0.12[.005]	--	4-192043-0	OBSELETE △ 19	
A	[.55]	[.026]	--	13	9.5[.375]	1-2	38	0.12[.005]	04174	3-192043-9		
A	[.55]	[.026]	--	13	9.5[.375]	UNPL	38	0.12[.005]	--	3-192043-8		
A	[.54]	[.026]	--	12	9.1[.359]	3-2	36	0.18[.007]	04204	3-192043-7	OBSELETE	
A	[.54]	[.026]	--	12	9.1[.359]	1-2	36	0.18[.007]	04184	3-192043-6	OBSELETE	
A	[.54]	[.026]	--	12	9.1[.359]	UNPL	36	0.18[.007]	04183	3-192043-5		
A	--	--	--	12	8.9[.359]	3-2	35	0.115[.006]	04178	3-192043-4	OBSELETE	
A	--	--	--	12	8 [.315]	3-2	30	0.18[.007]	04177	3-192043-3	OBSELETE	
A	--	[.026]	--	12	8 [.315]	3-2	29	0.18[.007]	04179	3-192043-2	OBSELETE	
A	[.38]	[.026]	--	12	8 [.315]	1-2	29	0.18[.007]	04206	3-192043-1		
A	[.38]	[.026]	--	12	8 [.315]	UNPL	29	0.18[.007]	04185	3-192043-0	OBSELETE	
A	[.43]	[.024]	--	12	8 [.315]	3-2	32	0.15[.006]	--	2-192043-9	△ 19	
A	[.40]	[.024]	--	12	8 [.315]	1-2	31	0.15[.006]	--	2-192043-8		
A	[.43]	[.024]	--	12	8 [.315]	1-2	32	0.15[.006]	04076	2-192043-7	OBSELETE	
A	[.43]	[.024]	--	12	8 [.315]	UNPL	32	0.15[.006]	04052	2-192043-6	OBSELETE	
A	[.40]	[.026]	--	13	7.9[.312]	UNPL	32	0.12[.005]	04079	2-192043-5	OBSELETE	
A	--	--	--	12	7.5[.296]	1-2	32	0.18[.007]	04189	2-192043-4	OBSELETE	
A	--	--	--	12	7.49[.295]	3-2	30	0.15[.006]	04051	2-192043-3	OBSELETE	
A	--	--	--	12	7.44[.293]	3-2	29	0.12[.005]	04050	2-192043-2	OBSELETE	
A	--	--	--	12	7.14[.281]	3-2	28	0.20[.008]	04049	2-192043-1	OBSELETE	
A	[.45]	[.024]	--	12	7.1[.280]	3-2	28	0.15[.006]	04106	2-192043-0		
A	[.45]	[.024]	--	12	7.1[.280]	UNPL	28	0.15[.006]	04199	1-192043-9	OBSELETE	
A	--	--	--	12	7[.276]	3-2	27	0.12[.005]	04047	1-192043-8	OBSELETE	
A	--	--	--	12	6.45[.254]	7-2	26	0.15[.006]	04065	1-192043-7	OBSELETE	
A	[.35]	[.024]	--	12	6.45[.254]	3-2	26	0.15[.006]	04075	1-192043-6		
A	[.35]	[.024]	--	12	6.45[.254]	1-2	26	0.15[.006]	04086	1-192043-5	OBSELETE	
A	[.35]	[.024]	--	12	6.45[.254]	UNPL	26	0.15[.006]	04046	1-192043-4	OBSELETE	
A	[.50]	[.026]	--	13	6.45[.254]	UNPL	26	0.12[.005]	04093	1-192043-3	OBSELETE	
A	[.29]	[.024]	--	12	6.35[.250]	3-2	26	0.20[.008]	04045	1-192043-2	△ 19	
A	[.29]	[.024]	--	12	6.35[.250]	1-2	26	0.20[.008]	04116	1-192043-1		
SUPERSEDED BY 1-192043-6									--	1-192043-0		
A	[.29]	[.016]	--	13	6.35[.250]	UNPL	26	0.12[.005]	04082	192043-9	OBSELETE △ 19	
A	[.28]	[.024]	--	12	6 [.237]	3-2	24	0.15[.006]	04041	192043-8		
A	[.28]	[.024]	--	12	6 [.237]	UNPL	24	0.15[.006]	04042	192043-7		
A	[.28]	[.024]	--	12	5.54[.218]	1-2	23	0.15[.006]	04146	192043-6	OBSELETE	
A	[.28]	[.024]	--	12	5.54[.218]	UNPL	23	0.15[.006]	04143	192043-5	OBSELETE	
A	--	--	--	12	5.5[.217]	3-2	21	0.20[.008]	04040	192043-4	OBSELETE	
A	[.27]	[.024]	--	12	5.5[.217]	3-2	21	0.15[.006]	04105	192043-3	OBSELETE △ 19	
A	[.26]	[.024]	--	12	5 [.197]	3-2	20	0.15[.006]	04215	192043-2		
A	[.26]	[.024]	--	12	5 [.197]	UNPL	20	0.15[.006]	04216	192043-1		
STYLE	(FREE DIA)	LH		LENGTH	MAT'L (NOTE)	MATING PIN ø REF	PLATING (NOTE NO.)	NUM LOUV	MAT'L THK	REF	PART NUMBER	

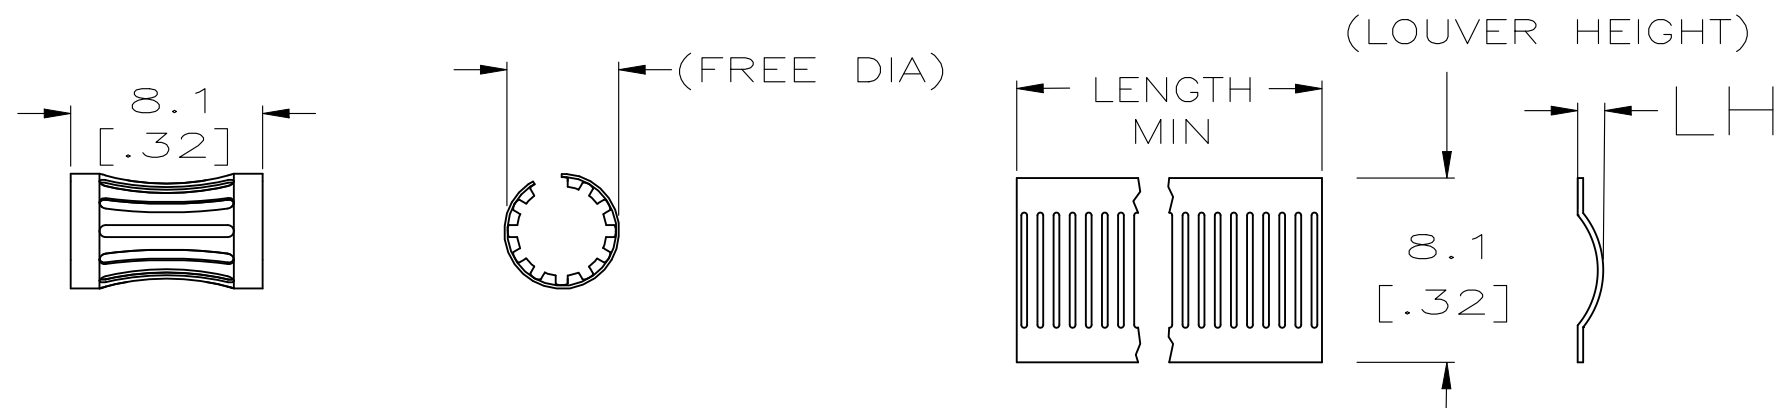

- 1 FINISH—SILVER PLATE 200 μINCH THICK MIN.
- 2 FINISH—NICKEL PLATE 40 μINCH THICK MIN.
- 3 FINISH—GOLD PLATE 10 μINCH THICK MIN.
- 4 FINISH
- 5 FINISH—GOLD PLATE 40 μINCH THICK MIN.
- 6 FINISH—TIN PLATE 300 μINCH THICK MIN.
- 7 FINISH—GOLD PLATE 50 μINCH THICK MIN.
- 8 FINISH—NICKEL PLATE 100 μINCH THICK MIN.
- 9 FINISH—PREPLATE
- 10
- 11 PLATING NOTES ARE TO BE INTERPRETED AS FOLLOWS,
6—8 AS 6 OVER 8.
- 12 MATERIAL—CDA172, BeCu.
- 13 MATERIAL—STAINLESS STEEL
- 14 PRODUCT IS SOLD BY THE FOOT.

- 15 OBSOLETE (PENDING).
- 16 MATERIAL: ELGILOY.
- 17 PRELIMINARY PART NUMBER.
- 18 FINISH: COPPER PLATE 10 uINCH THICK MIN.
- 19 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RA JAYNE 09-21-91		 TE Connectivity Ltd.	
		CHK J.TURNER 07-21-93			
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± 0.5 [.02] 3 PLC ± 0.25 [.010] 4 PLC ± — ANGLES — ± —		NAME CONTACT BAND, FEMALE	
		PRODUCT SPEC — APPLICATION SPEC —		SIZE A2	
MATERIAL —		FINISH SEE TABLE		CAGE CODE 00779	
		WEIGHT —		DRAWING NO C-192043	
		CUSTOMER DRAWING		RESTRICTED TO —	
				SCALE 1:1	
				SHEET 1 of 2	
				REV Y2	

