



PHONO PLUGS


- Mates with .125 (3.2) diameter jacks

CONVENTIONAL TYPE


MATERIAL:

Shell: Brass, Nickel Plate

Pin: Brass, Nickel Plate



CAT. NO. 561 - Crimp Type



CAT. NO. 567 - Conventional Type


PANEL MOUNT PHONO JACKS

- Mates with .125 (3.2) dia. pin
- Mounts to panel in .296 (7.6) dia. hole
- Color coded for ease of identification
- Complete with nut and solder lug



MATERIAL: Brass, Nickel Plate

HEX BASE CAT. NO.	INSULATOR COLOR	ROUND BASE CAT. NO.
581	WHITE	598
582	RED	580
576	BLACK	574
583	YELLOW	599



SNAP-FIT 90° P.C. PHONO JACKS

CHOICE OF TIN OR GOLD PLATE

- Complete one piece jack for insertion into PC board
- Time Saving
- No Wiring Required
- Snap-fits into PC board




MATERIAL:

Shell: Steel


Contact: Brass

Plating: Tin or Gold Plate

TIN PLATE CAT. NO.	INSULATOR COLOR	GOLD PLATE CAT. NO.
587	WHITE	936
588	RED	937
901	BLACK	900
589	YELLOW	938

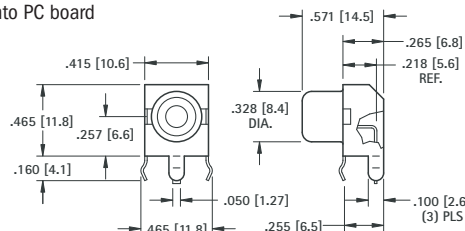

Mounting Detail



SNAP-FIT VERTICAL P.C. PHONO JACKS

- Extra long, one piece shell to accept plugs with longer pins for greater contact
- Snaps into holes on PC board and firmly held for soldering
- No staking required




MATERIAL:


Shell: Steel, Nickel Plate

Contact: Brass, Tin Plate

CAT. NO.	INSULATOR COLOR
584	WHITE
577	RED
585	BLACK
586	YELLOW

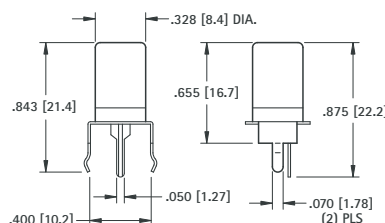


Mounting Detail




COLOR KEYED - P.C. PHONO JACKS

- Mates with .125 (3.2) diameter pins
- Features a normally closed circuit
- Snap-fit mounting for positive retention during wave soldering
- Various colors for circuit identification

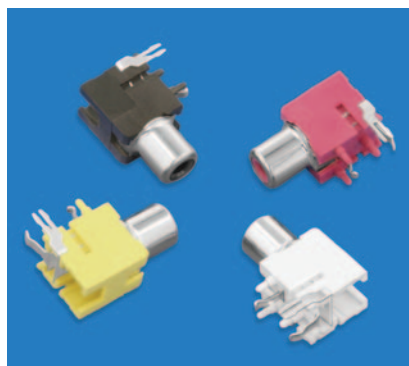

CAT. NO.	INSULATOR COLOR
970	WHITE
971	RED
972	BLACK
973	YELLOW

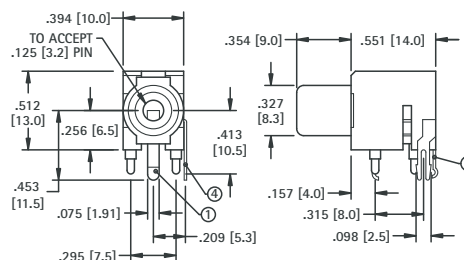

SCHEMATIC



SPECIFICATIONS

Housing: PBT

Ground Terminal: .020 (.51)
Brass, Nickel Plate

Spring Contact: .012 (.30)
Phosphor Bronze, Silver Plate

Shunt Terminal: .016 (.41)
Brass, Silver Plate