




NUMBER 60908




FITS .106 DIA. PIN

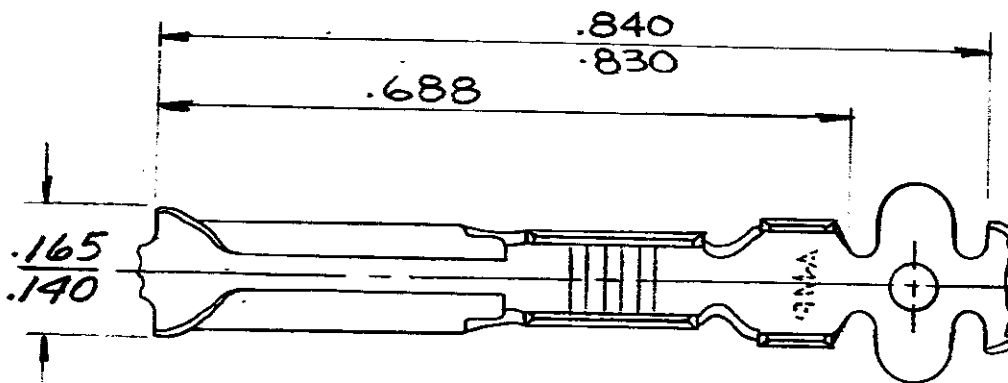

SECT A-A

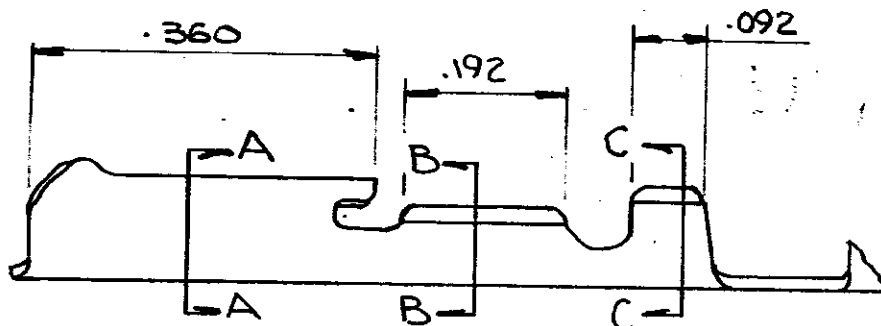

SECT B-B



SECT C-C

CONTINUOUS STRIP, ON REELS

WIRE SIZE AWG	INSULATION RANGE	PIN DIA. ±.002	MATERIAL AND FINISH	TERMINAL NUMBER
24-20	.075-.100	.106	.012 BRASS-PRE-TIN	60908-1

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

G	ADDED SEER. A 2082	NA	Key	9/1/69
F	CHANGED DIST. A-47	LE	Key	9-20-71
E	.165/.140 WAS .155/.140	JRK	AET	11/8/69
D	.155/.140 WAS .165/.145	JRK	HET	10/1/68
C	ADDED .165/.145	EXIP	WJ	9/1/68
B	RELEASED	CM	SH	12-1-68
A	REVISED A 645	CNI	RW	11/1/65
	HAS P-28634			
LTR	REVISION RECORD	DR	CHK	DATE

©1965 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY
REFERENCE ONLY

MATERIAL AND FINISH



AMP INCORPORATED
HARRISBURG, PENNA.

CLASS

TYPE

WIRE — RANGE — INSULATION

TOLERANCE EXCEPT AS NOTED
± .013 ± 1° 0'

SCALE
5-1

LOC

NO

REV

AF

A

60908

G

NAME

.106 DIA. PIN RECEPTACLE